




PERFORM. LIKE NO OTHER.™

Enforcer™ Volterra™ Pumper

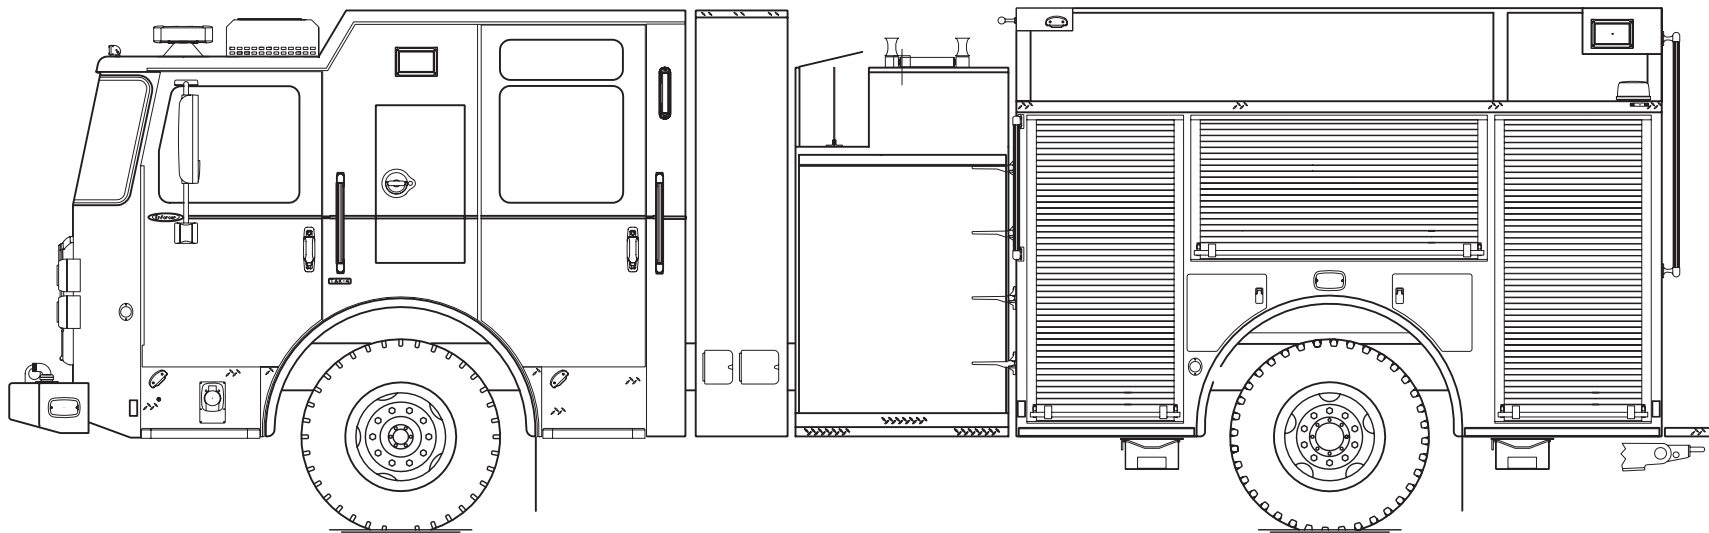

Chassis

Chassis	60" Enforcer cab w/10" raised roof
Seating Capacity	4
Overall Height	10'
Overall Length	30'
GVW Rating	49,800 lb
Safety	Side Roll and Frontal Impact Protection
Front Axle	TAK-4® Independent Front Suspension , 22,800 lb
Rear Axle	Meritor RS25-160, 27,000 lb
Engine	Cummins B6.7, EPA 2024 Certified
Transmission	Oshkosh patented Electro-Mechanical Infinitely Variable Transmission (EMIVT) w/ integrated regenerative braking
Electrical System	Centralized integration of HV batteries and HV components Command Zone™ Advanced Electronics System

Body

Material	Aluminum
Shelving	Adjustable, up to 500 lb
Doors	Rollup
Pump	Waterous, 1,500 gpm Continuous, fully rated pump performance in electric mode, uninterrupted in backup ICE mode
Tank	500 gallons
Pump Panel	Pierce® Control Zone™ 45" pump panel
Foam System	Husky™ 3 Foam System
Foam Cell	20 gallons

