

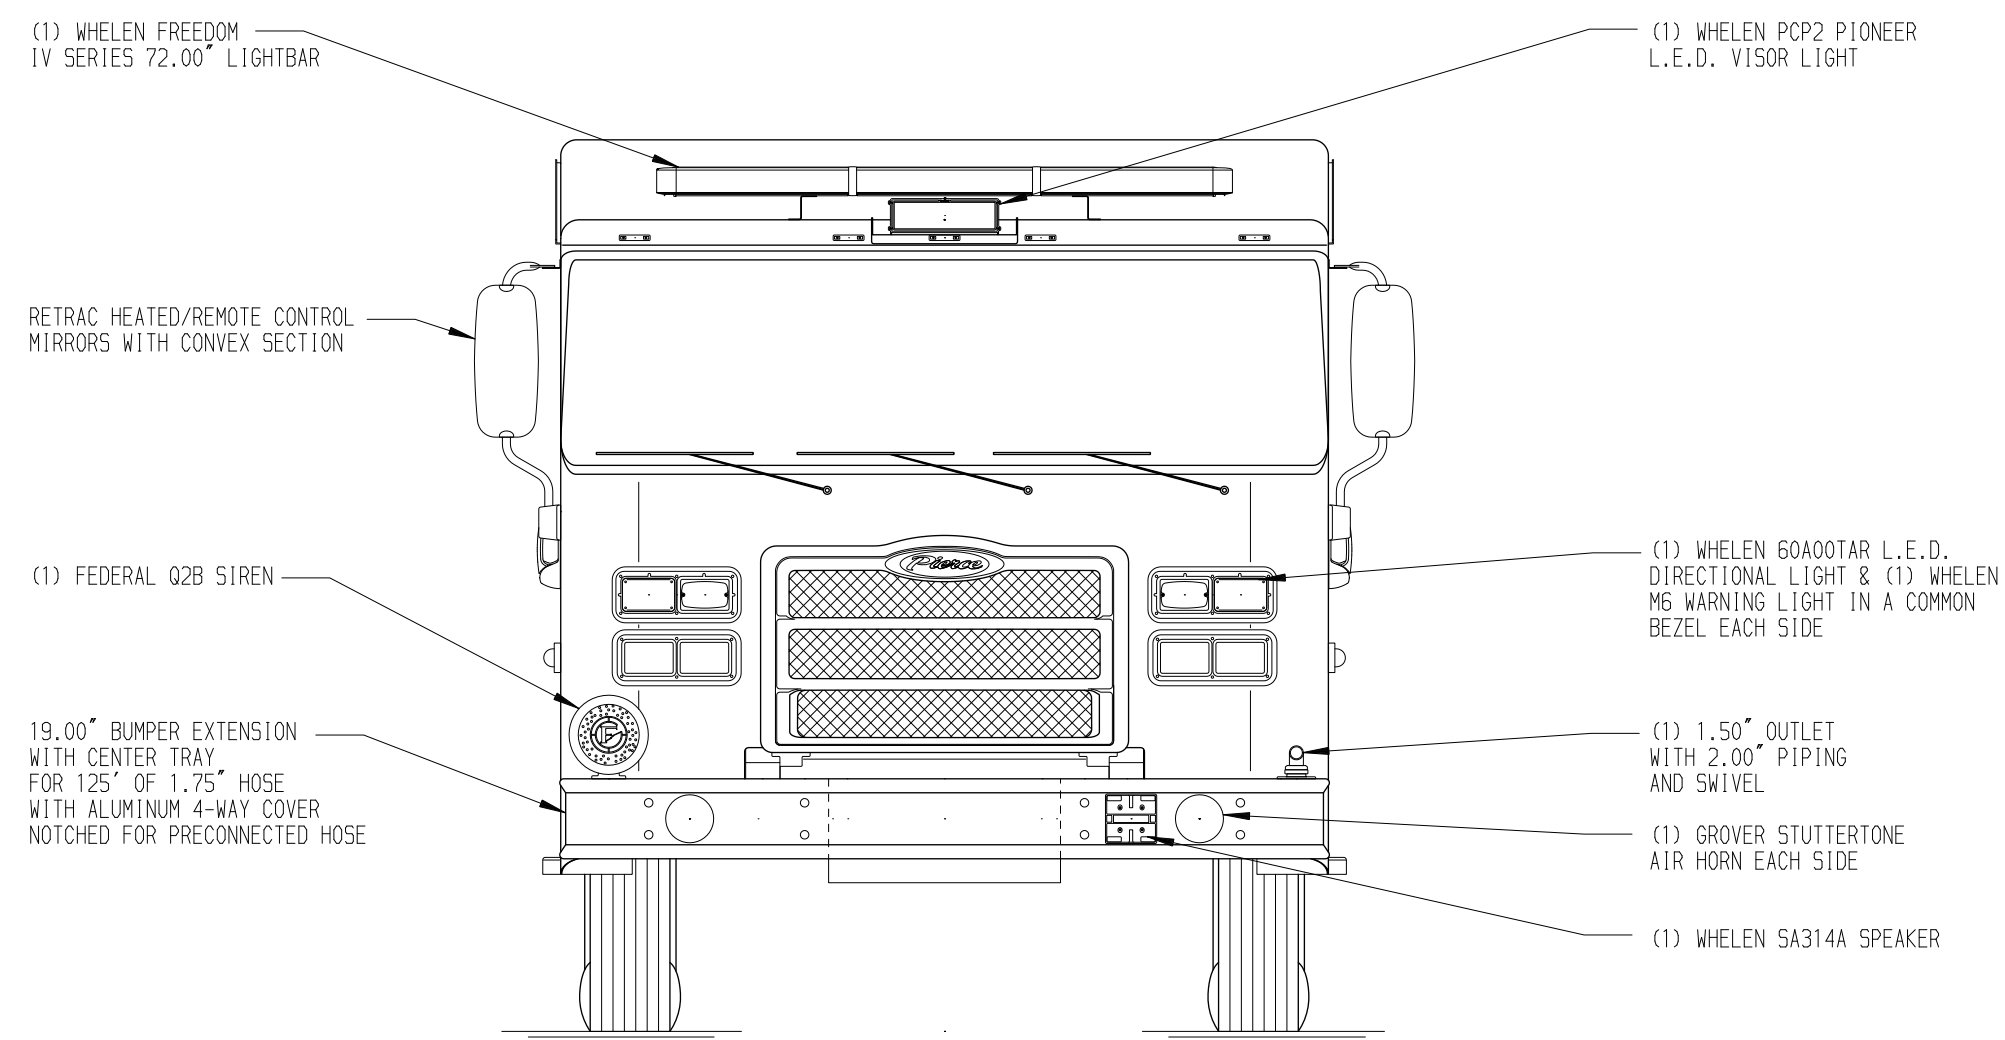


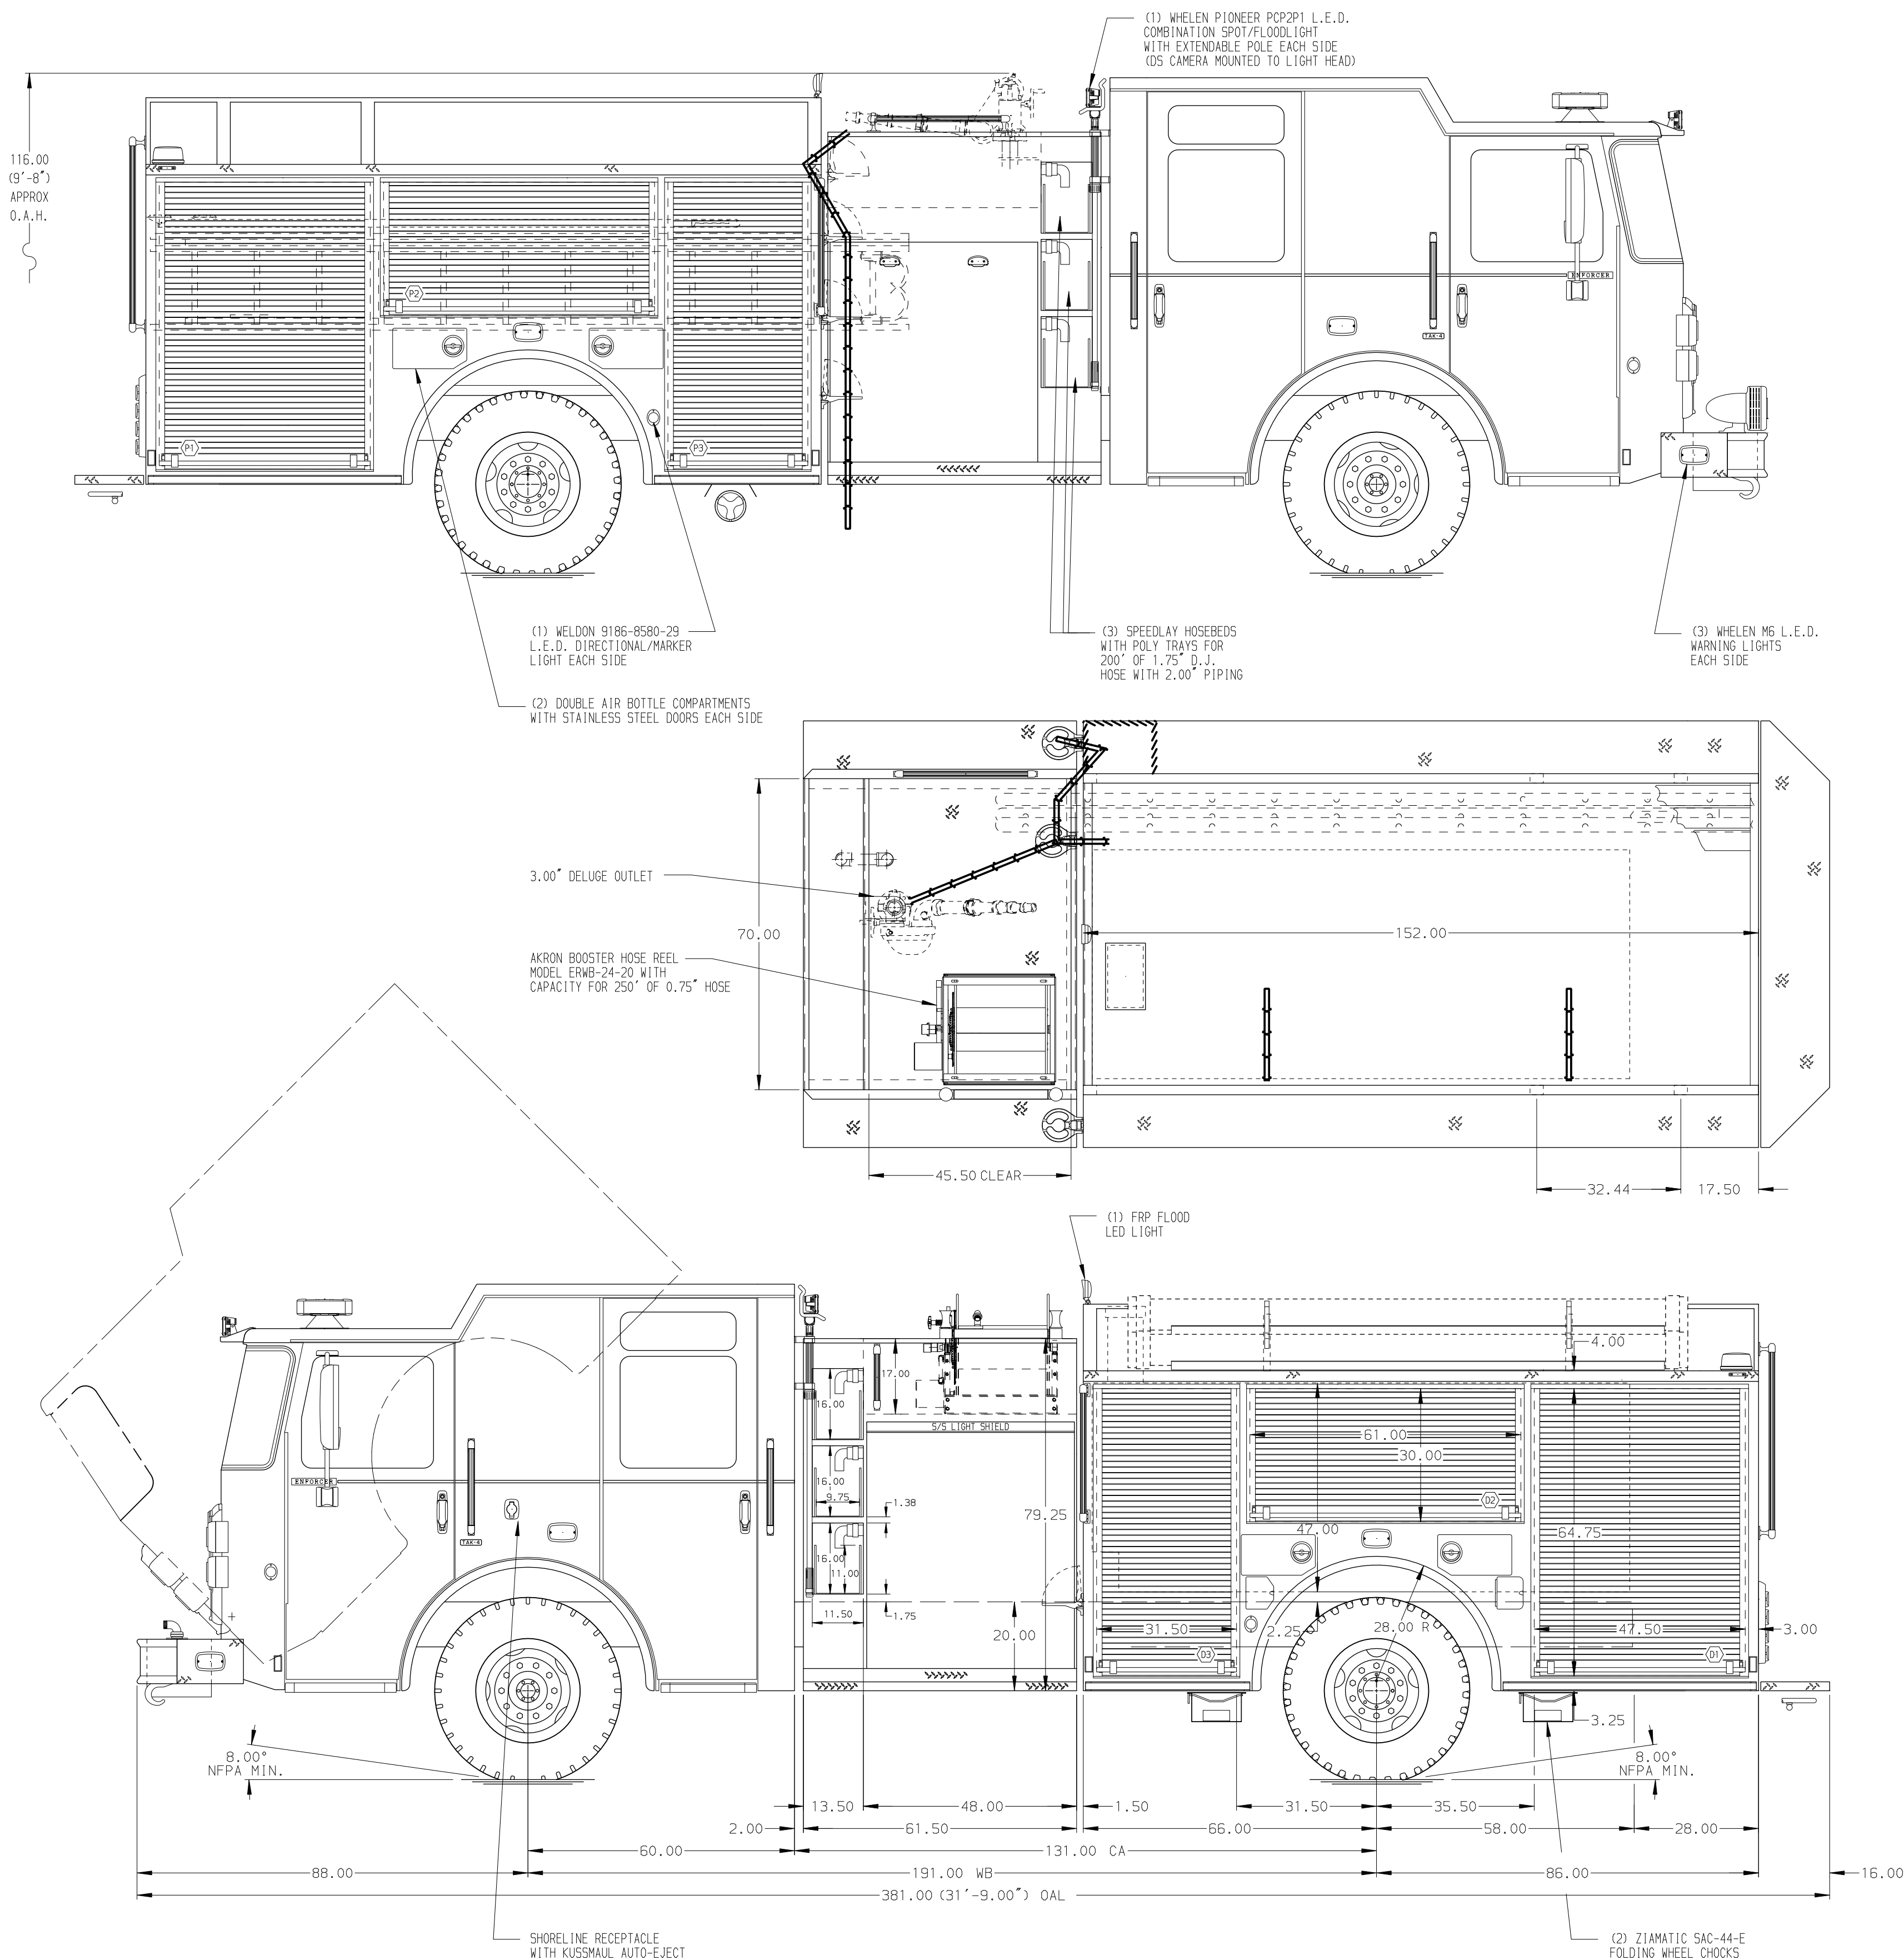

HOSEBED CAPACITIES

- ① 200' OF 2.50" D.J. POLY HOSE
- ② 1200' OF 5.00" D.J. POLY HOSE
- ③ 500' OF 3.00" D.J. POLY HOSE

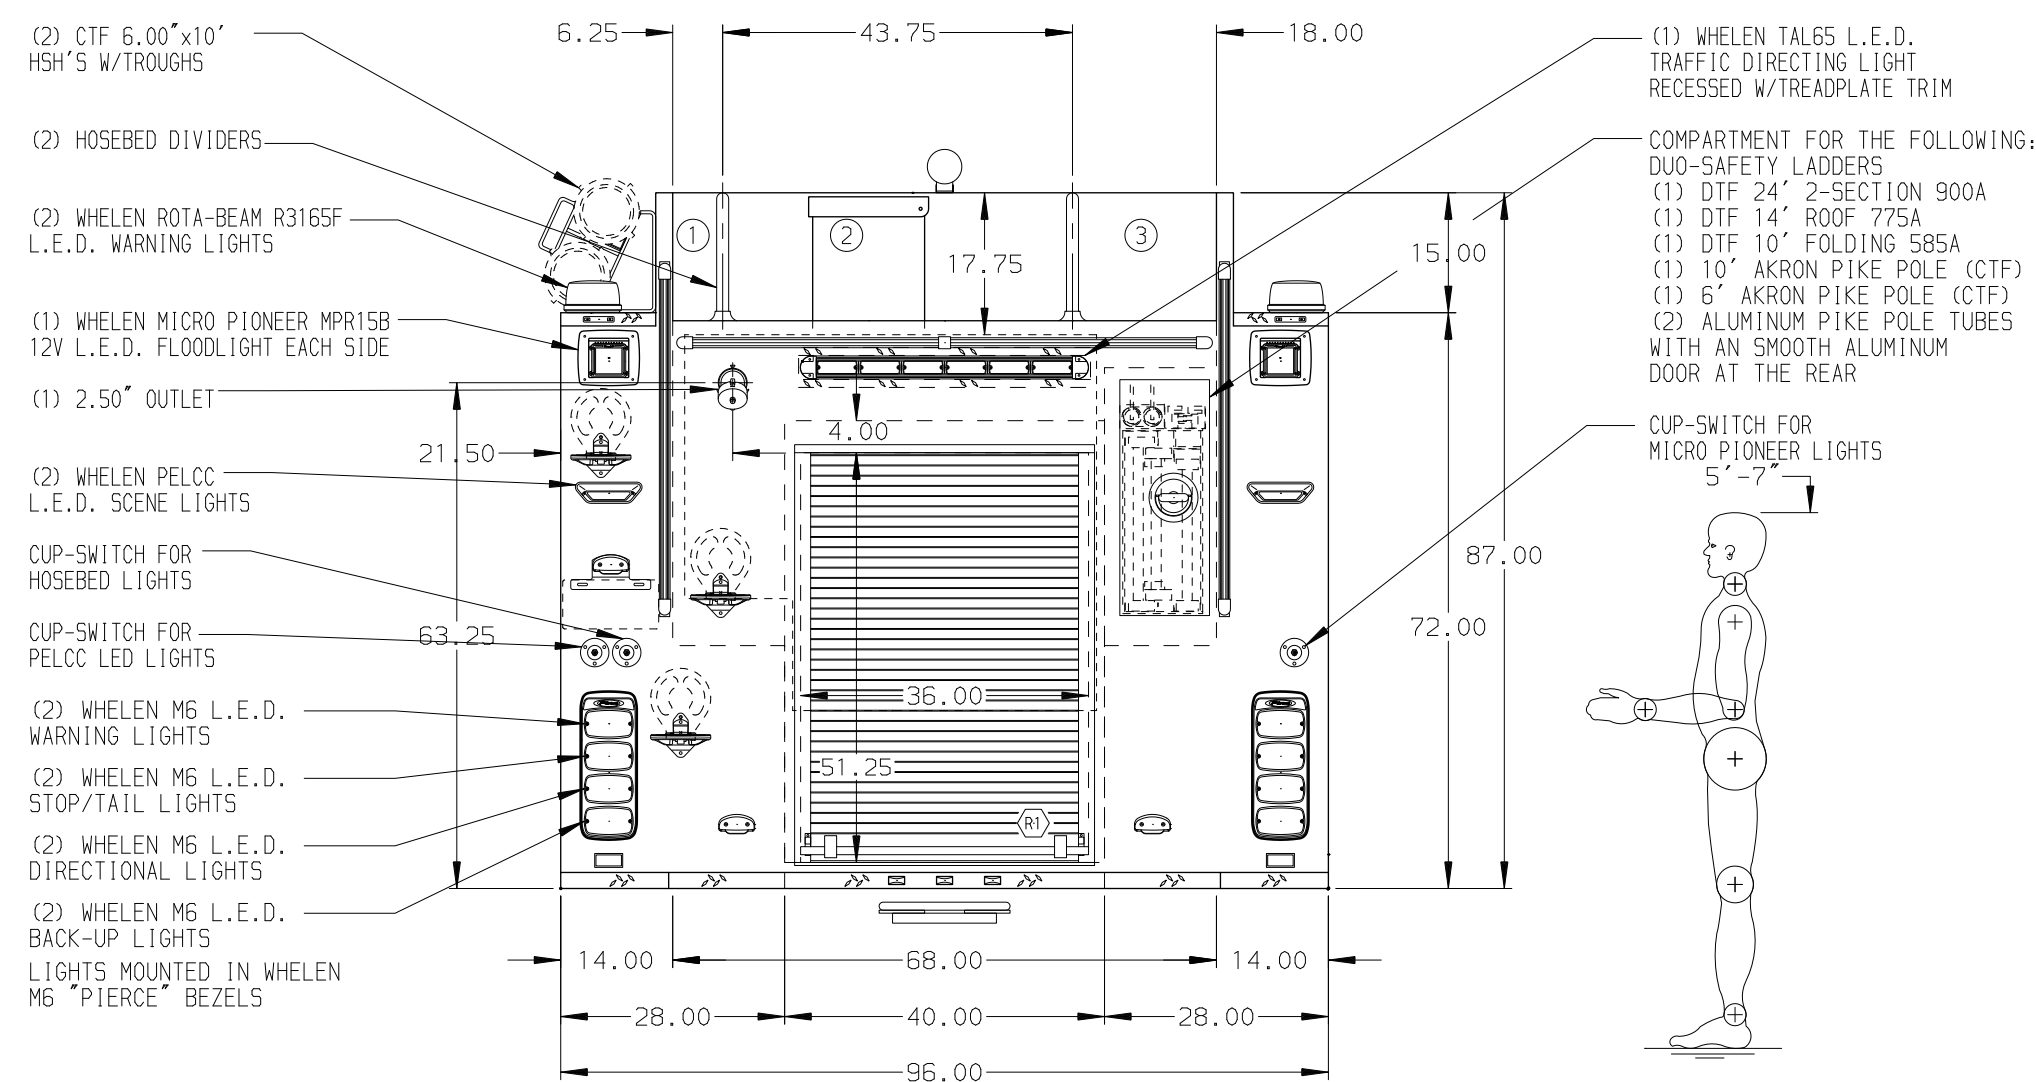

ALUMINUM BODY

MAXIMUM O.A.H. 116.00"

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR OUTLET WITH SHUT-OFF VALVE LOCATED ON DS PUMP PANEL
3. BATTERY CHARGER LOCATED IN COMPARTMENT D3
4. BATTERY CHARGE INDICATOR LOCATED ON D.S. SEAT RISER
5. ONE L.E.D. LIGHT STRIP LOCATED ON EACH SIDE IN THE HOSEBED
6. ONE FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELF IN COMPARTMENT D1, D3, P1, P3 & R1
7. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT P2
8. CTECH DRAWER ASSEMBLY IN COMPARTMENT D3

				CHASSIS DATA
				MAKE
				PIERCE
				MODEL
15JUN16	DATE	AMI	COR	ENFORCER
REV		BY	CH	

		JOB NO.	30069
		SCALE	1:24
		DATE	
		DRAWN BY	AMI
		03MAY16	
		CHECKED BY	SMA
		03MAY16	
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE 2000-D-1000 GAL POLY, 152" FDLER, FLUSH REAR
(3)SPEEDLAYS, DELUGE, LADDERS BESIDE TANK
FOR CITY OF BAXTER SPRINGS
BAXTER SPRINGS, KANSAS
DWG NO. 30069AD