


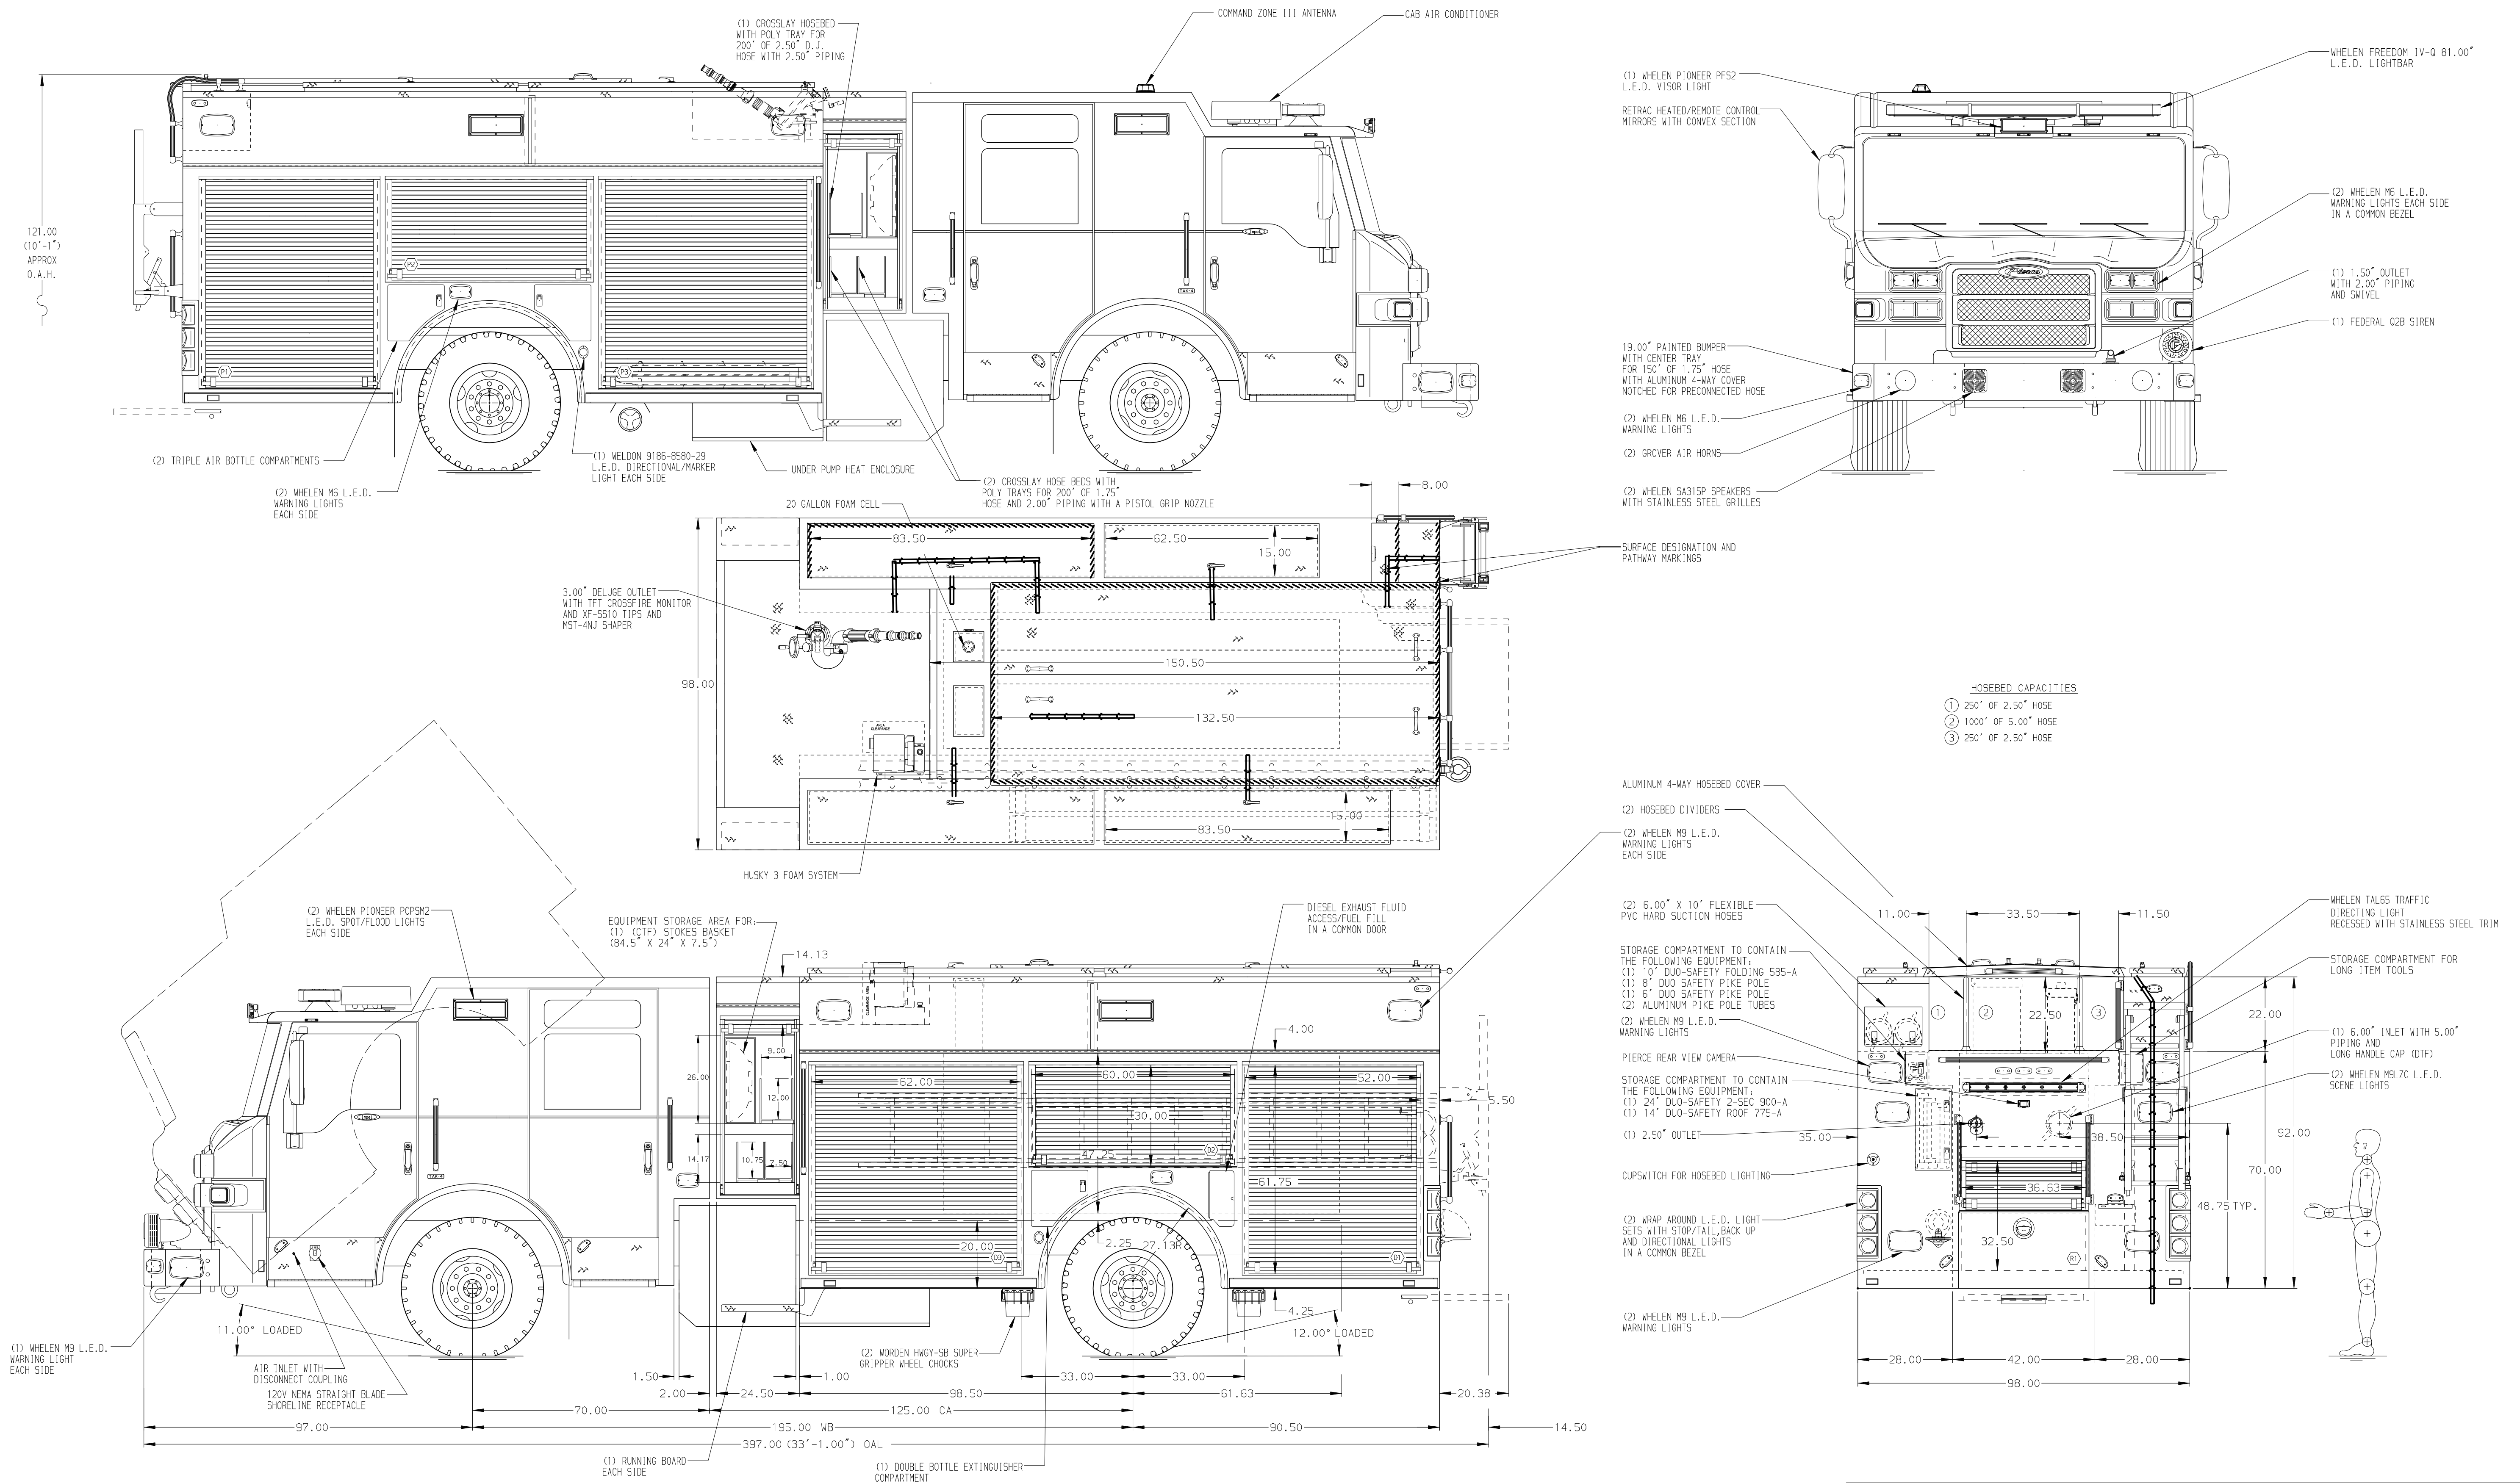

ALUMINUM BODY MAXIMUM O.A.L. 390.00" MAXIMUM O.A.H. 134.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED IN D3
3. BATTERY CHARGER INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. FULL WIDTH/ DEPTH ADJUSTABLE SHELVES TWO IN P1 AND P3 AND ONE IN D1, D2, AND P2
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN D1 AND P1
7. ONE DRAWER TECH DRAWER ASSEMBLY IN D3
8. THREE DRAWER TECH DRAWER ASSEMBLY IN P3
9. STORAGE FOR LITTLE GIANT 17' LADDER IN P3
10. POST WITH MOUNTING HOUSE FOR HOSE STORAGE IN P3

11. MOUNTING POLY BOARD ON THE SIDE WALL OF P3
12. ONE VERTICAL PARTITION IN P2
13. ONE SPECIAL HEIGHT VERTICAL PARTITION IN P3
14. ONE ZICO AIR BOTTLE HOLDER IN D3
15. ONE EDGESTAR REFRIGERATOR IN P2
16. (1) DUPLEX RECEPTACLE IN EACH EMS CABINET AND P1

REV	DATE	BY	CH	IMPEL
1	12APR18	LST	KWI	
2	27NOV17	LST	JJR	
3	06NOV17	LST	LPA	
4	03NOV17	LST	LPA	

Pierce MANUFACTURING INC.		JOB NO.	31598
		SCALE	1:24
		DATE	
		DRAWN BY	LST
		CHECKED BY	CDU
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE	1500-D-770P 750 GAL OF WATER W/ 20 GAL FOAM CELL 189" PUC RESCUE, LADDERS THRU BODY, (3) X-LAYS
FOR	ONALASKA FIRE DEPARTMENT ONALASKA, WISCONSIN
DWG NO.	31598AD