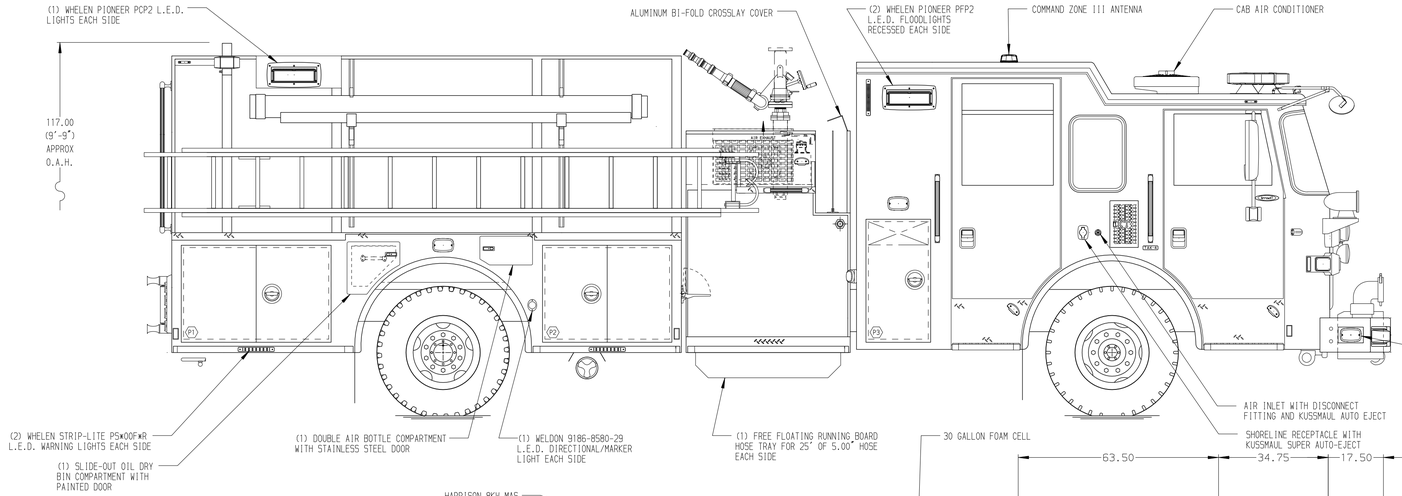

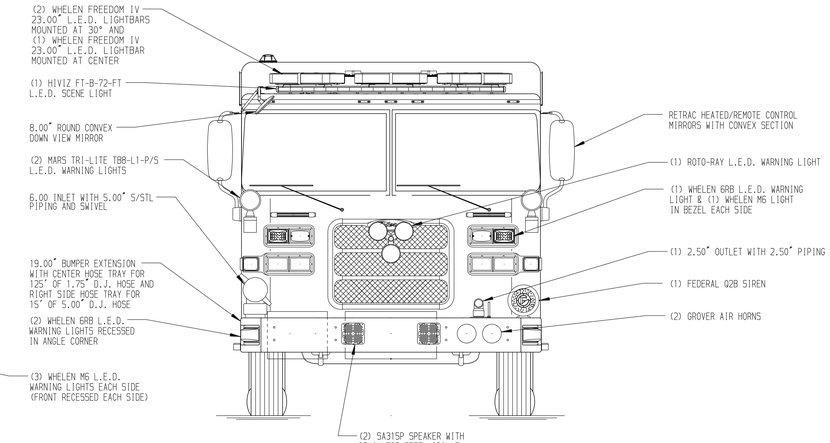

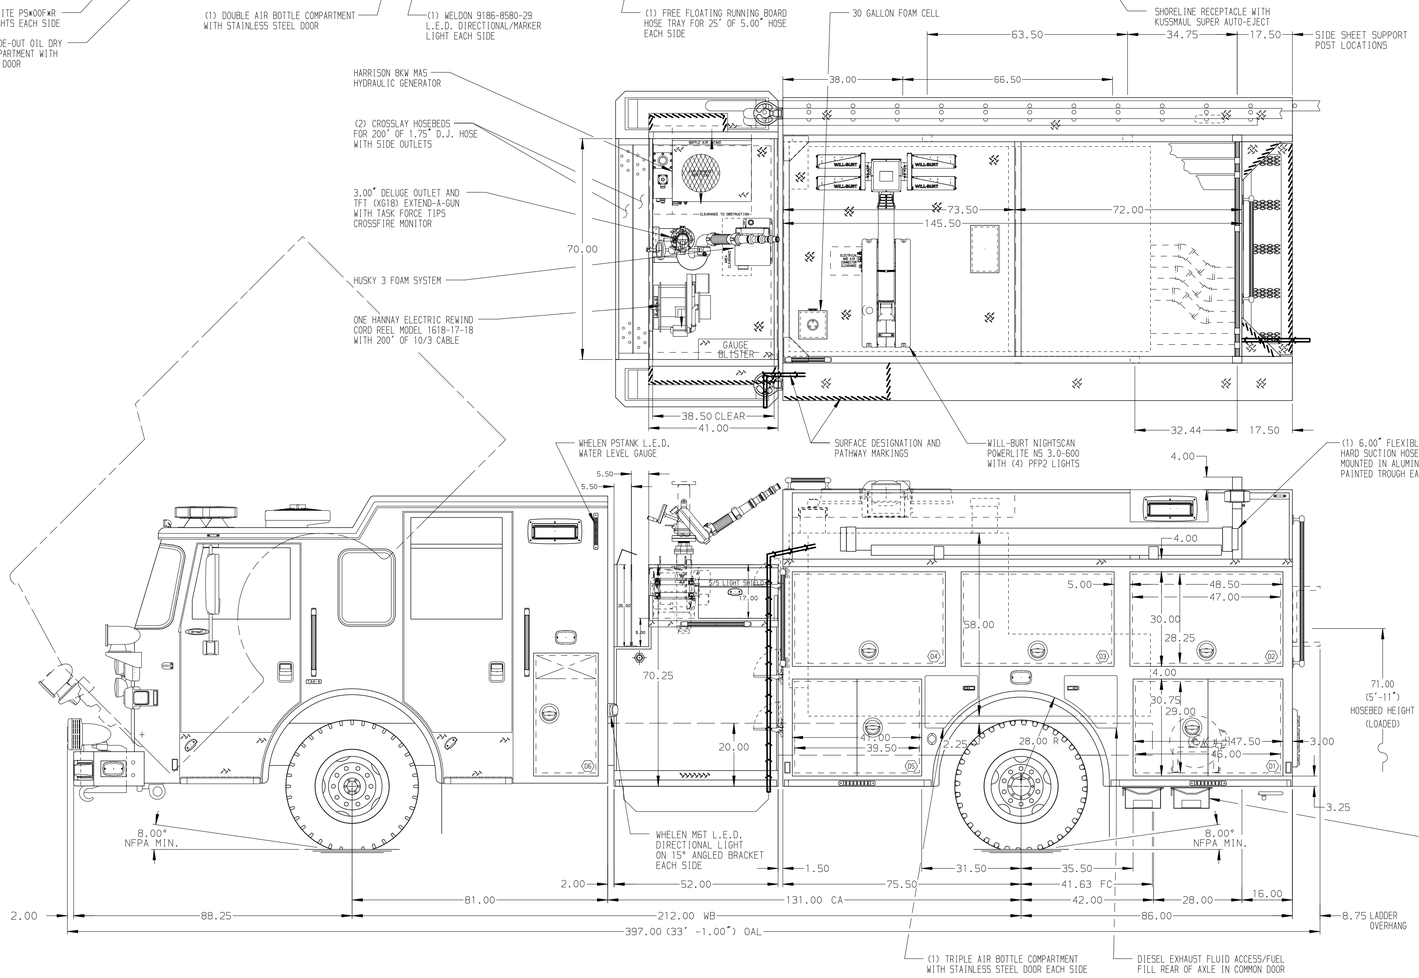

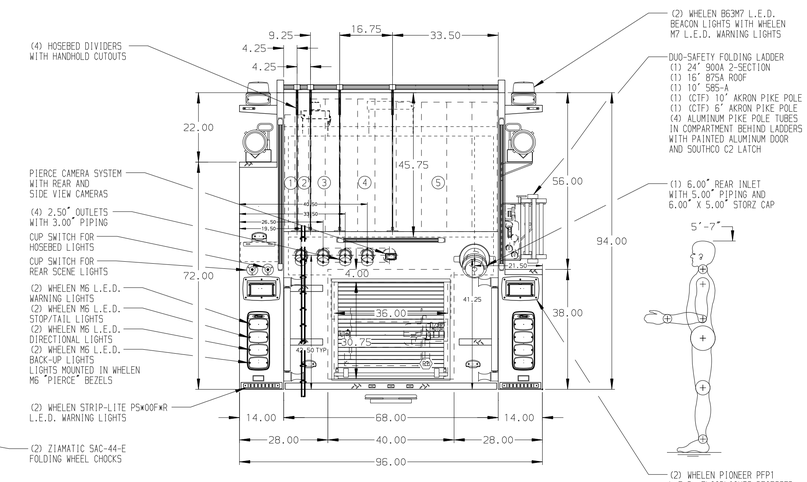

HOSEBED CAPACITIES

1. 300' OF 1.75" D.J. POLY HOSE
2. 300' OF 1.75" D.J. POLY HOSE
3. 600' OF 2.50" D.J. POLY HOSE
4. 900' OF 3.00" D.J. POLY HOSE
5. 1200' OF 5.00" D.J. POLY HOSE

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR OUTLET WITH SHUT-OFF VALVE LOCATED ON D.S. AND P.S. PUMP PANEL
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. SUB-FEED CIRCUIT BREAKER PANEL IN COMPARTMENT D4
4. RUBBER FENDER CROWNS LOCATED IN FRONT AND REAR
5. CIRCUIT BREAKER PANEL IN COMPARTMENT D4
6. ONE HANNAY BOOSTER REEL MODEL EFG4124-17-18 LOCATED IN COMPARTMENT R1 WITH 150' OF 0.75" HOSE
7. PAINTED SHELF TRACKS LOCATED IN COMPARTMENTS D1, D2, D3, D4, D5, P1 & P2
8. STAINLESS STEEL DRIP GUARD LOCATED IN COMPARTMENT R1
9. (1) 120V 6-PLACE RECEPTACLE LOCATED ON EACH SIDE OF THE ENGINE TUNNEL
10. ONE ADJUSTABLE SLIDE OUT TRAY LOCATED IN COMPARTMENT R1
11. ONE FLOOR MOUNTED SLIDE OUT TRAY LOCATED IN COMPARTMENT D1, D5, P1, & P2
12. TWO ALUMINUM TOOLBOARDS LOCATED IN COMPARTMENT D5
13. PAC TRAC ON BACK WALL IN COMPARTMENT D2, D3, & D4
14. ONE VERTICAL PARTITION LOCATED IN COMPARTMENT D5
15. BATTER CHARGER INDICATOR LOCATED ON D5 SEAT RISER

REV	DATE	BY	CH
1	21AUG17	MMF	-
2	08AUG17	MMF	DTS
3	07DEC16	CSQ	DTS
4	28OCT16	CSQ	CSH

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

Pierce MANUFACTURING INC.

TITLE: 2000-D-1000P W/30G FOAM, 161" DS HIGH (3) LIFT UP, PS LOW, (2) XLAYS, BOOSTER REEL, DELUGE, GENERATOR
FOR: PALMER MUNICIPAL FIRE DEPARTMENT, PALMER, PENNSYLVANIA
DWG NO.: 30713AD

JOB NO.	30713
SCALE	1:24
DATE	
DRAWN BY	CSQ
DATE	240CT16
CHECKED BY	CSH
DATE	240CT16
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 22-AUG-2017 07:12:10