



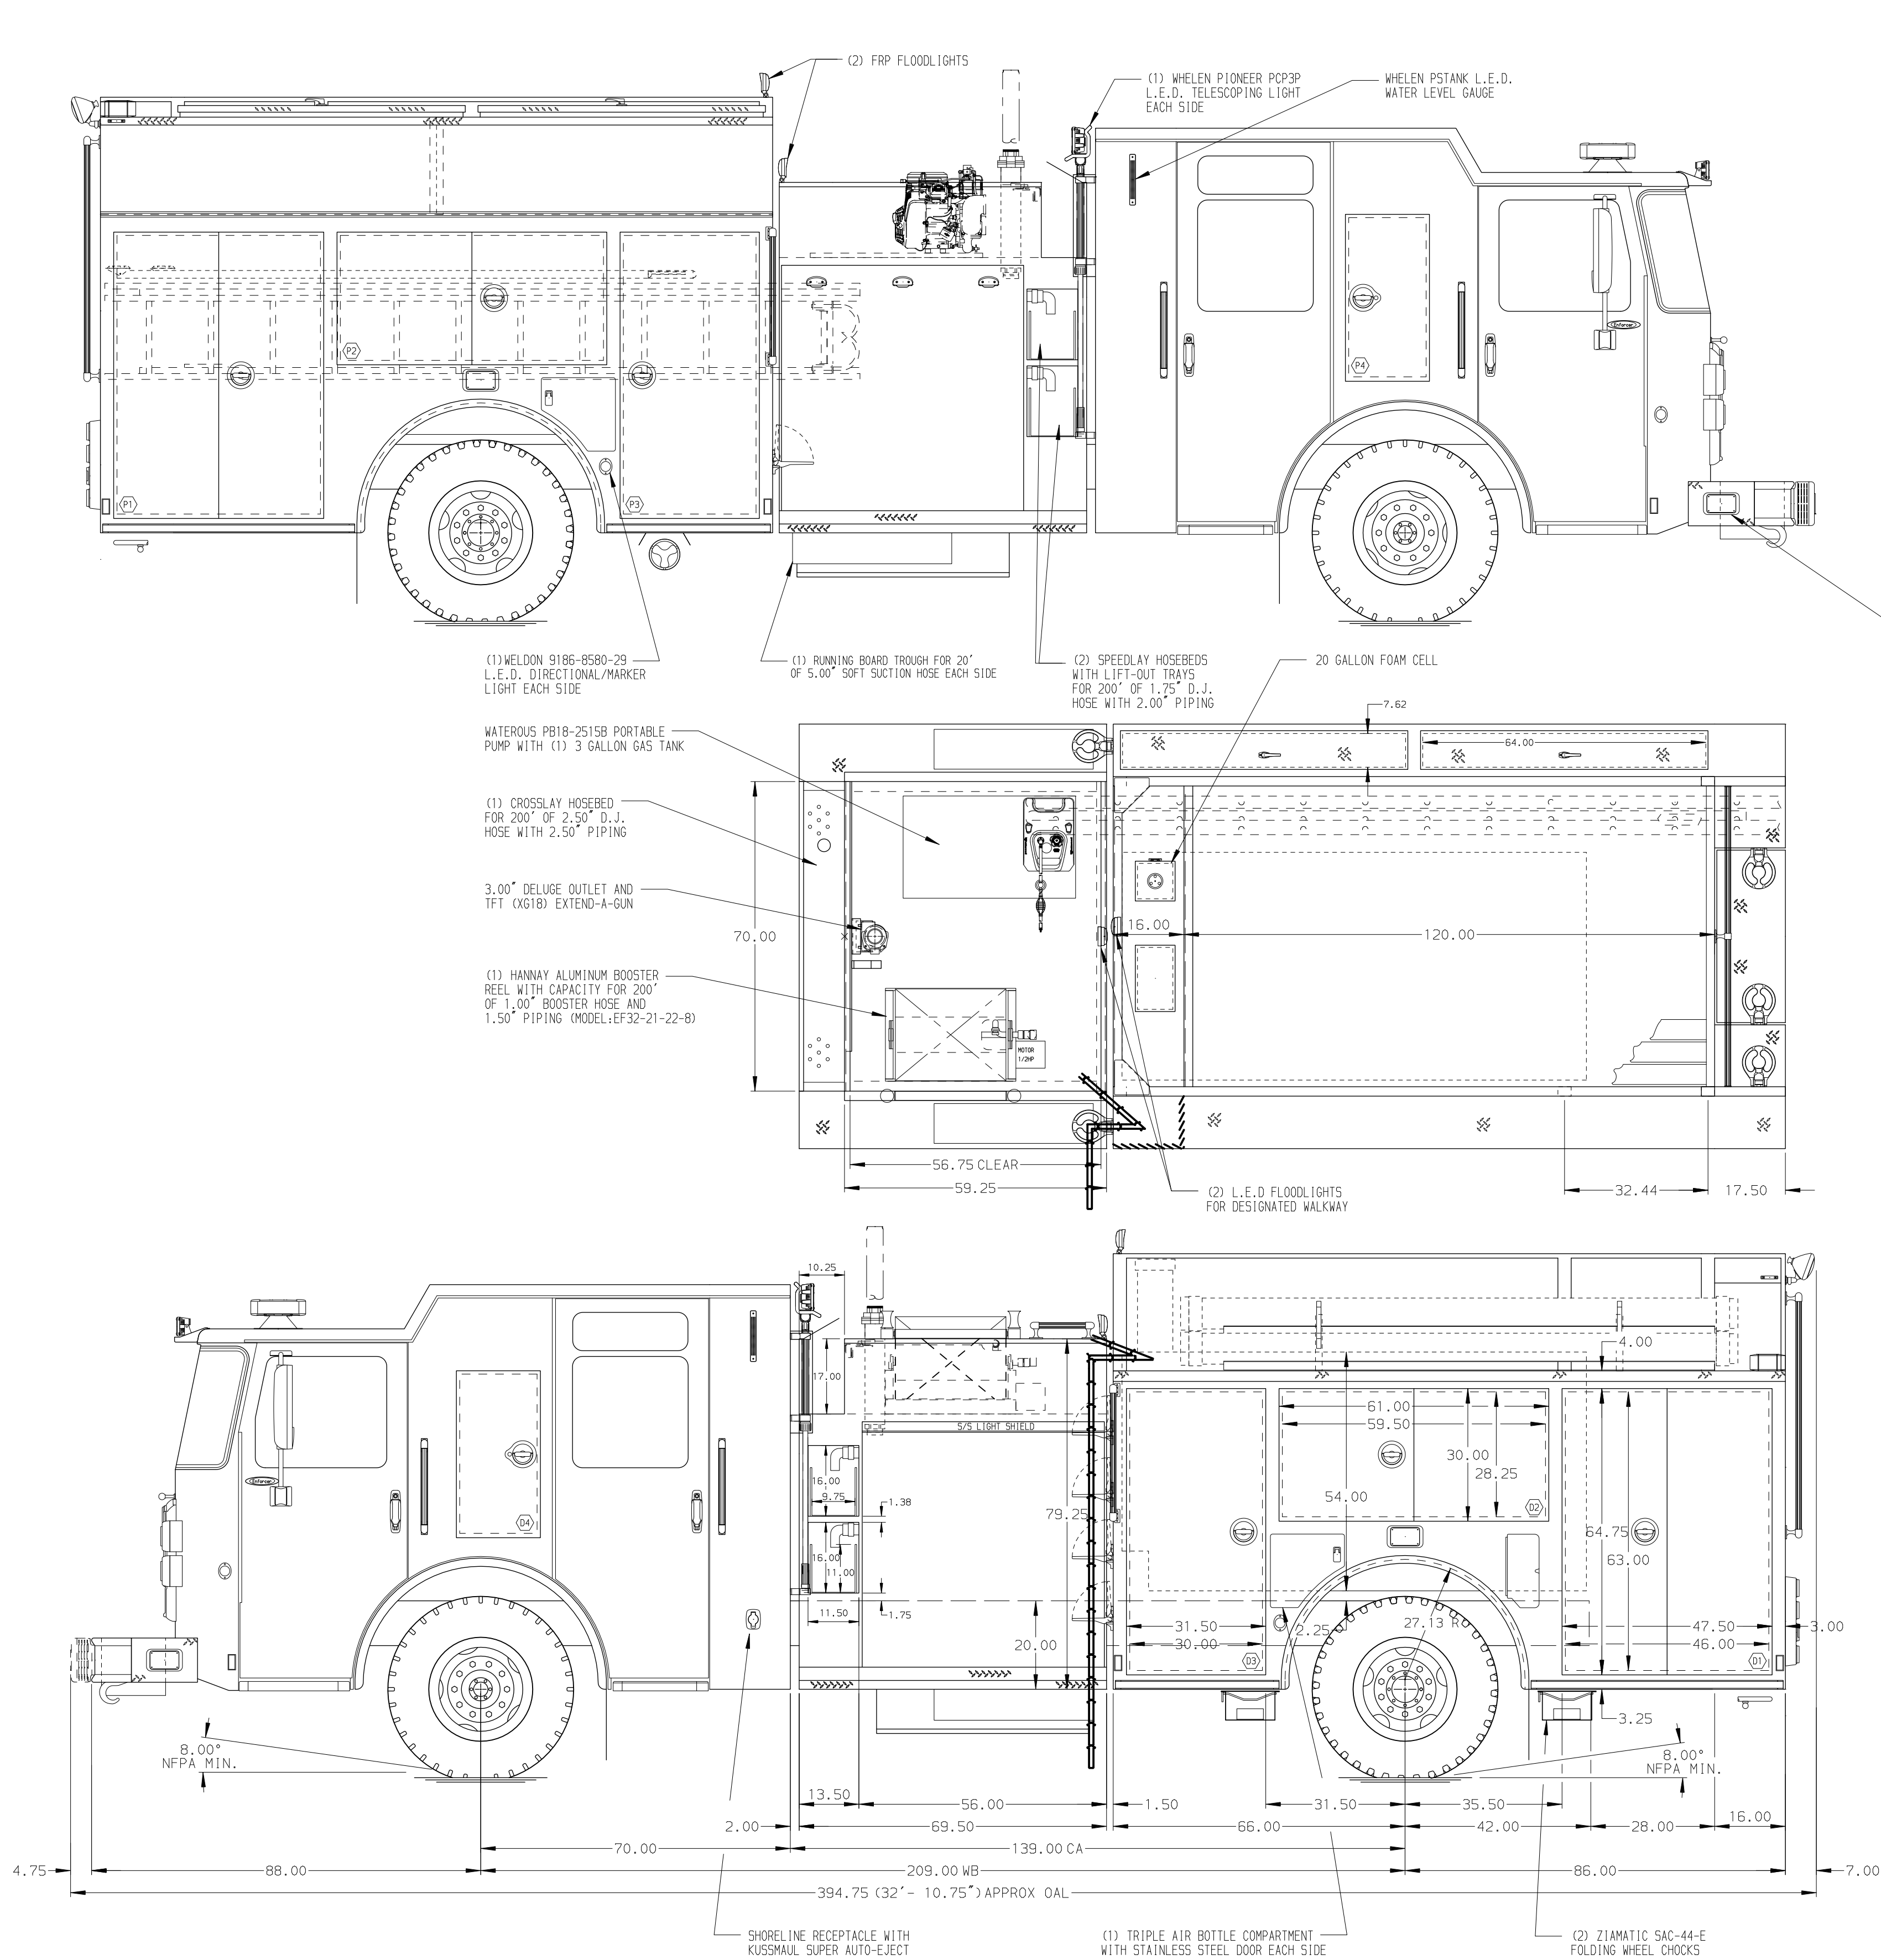

HOSEBED CAPACITIES

- ① - 400' OF 2.50" HOSE
- ② - 800' OF 3.00" HOSE
- ③ - 1000' OF 5.00" HOSE

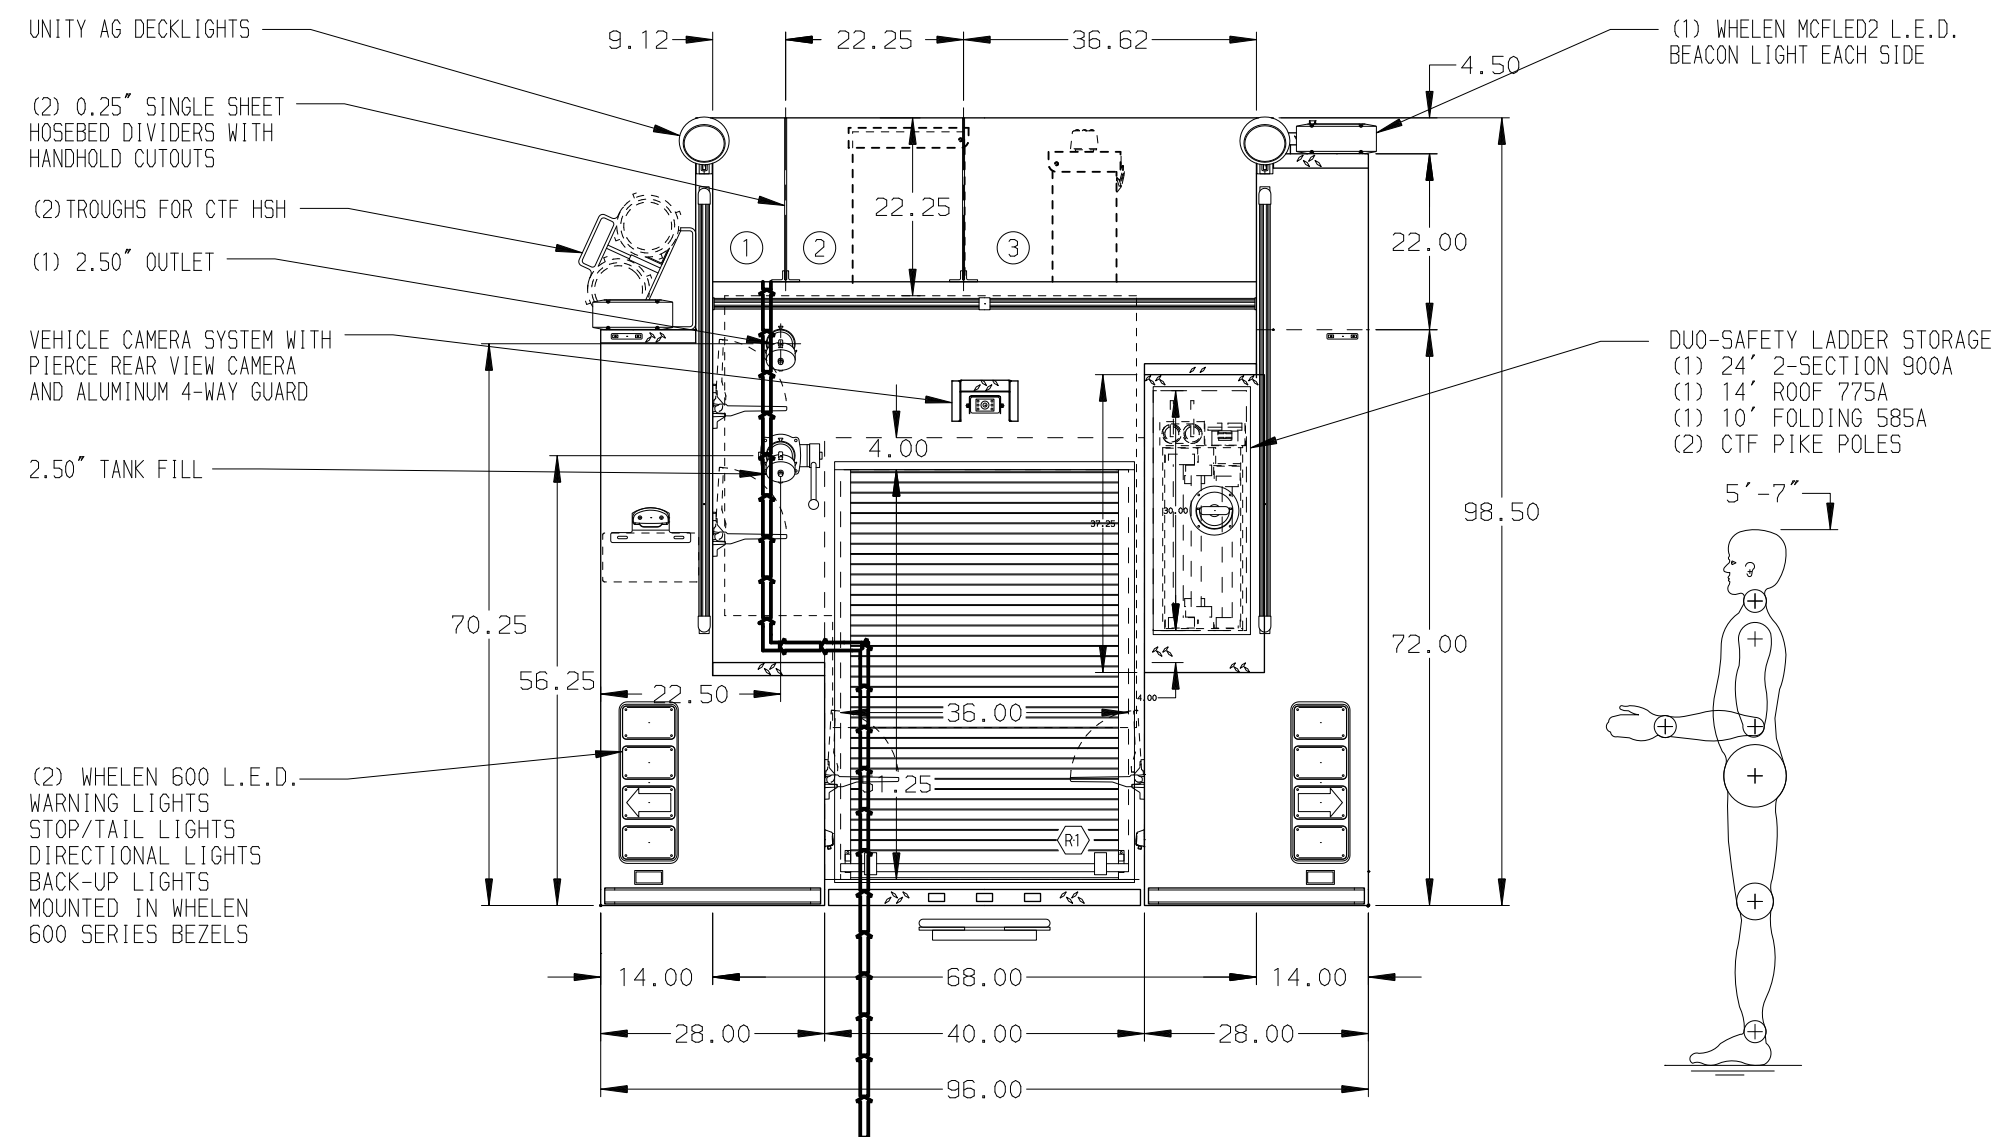

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING LOCATED IN D5 STEP WELL
- BATTERY CHARGE INDICATOR LOCATED IN COMPARTMENT D3
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED ON COMPARTMENT R1
- ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN COMPARTMENT D3, P1, R1, TWO IN D1 & P3
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT D3, P1 & P3
- FOAM PRO 1600 SINGLE AGENT FOAM SYSTEM LOCATED PER SHOP ORDER

REV	DATE	BY	CH	ENFORCER	TITLE	DWG NO.
1	19SEP17	MMF	MSA	CHASSIS DATA	1500-D-1000P W/20 GALLON FOAM CELL, 152" PUMPER BODY (1)XLAY, (2)SPEEDLAYS, DELUGE, LADDERS BTWN BODY & SS	31336AD
2	18AUG17	AMI	MSA	MAKE	IDAHO FALLS FIRE DEPARTMENT	
3	30JUN17	AMI	SMA	PIERCE	IDAHO FALLS, IDAHO	
4	23JUN17	AMI	SMA	MODEL		

JOB NO.	31336
SCALE	1:24
DATE	
DRAWN BY	AMI
CHECKED BY	SMA
SHEET SIZE	D
SHEET NO.	1 OF 1