## Pumper, PUC BODY

Pumper, PUC, Aluminum

CHASSIS

Enforcer Chassis, PUC

## CHASSIS

AXLE, FRONT, CUSTOM 18,000 lb Meritor Axle

AXLE, REAR

27,000 lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

26" Extended Painted Steel

CAB

7010 Enforcer Cab, PUC

BODY

WATER TANK

750 Gallon Poly Water Tank

COMPT, PUMPER, REAR 40.50" FF Rollup Rear Compt w/Tailboard, PUC

COMPT, PUMPER, LEFT SIDE

189" Rollup Full Height & Depth Front & Rear, PUC

COMPT, PUMPER, RIGHT SIDE 189" Rollup Full Height & Depth Front & Rear, PUC

## FIRE SUPPRESSION

PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50"

1.50" Crosslay Not Required

CROSSLAYS, 2.50" 2.50" Crosslay Not Required

GENERATOR


Generator Not Required

Foam System External Foam System

Foam Cell

30 Gallon Foam Cell, Not Reduced Water, PUC

Frontal Impact Protection

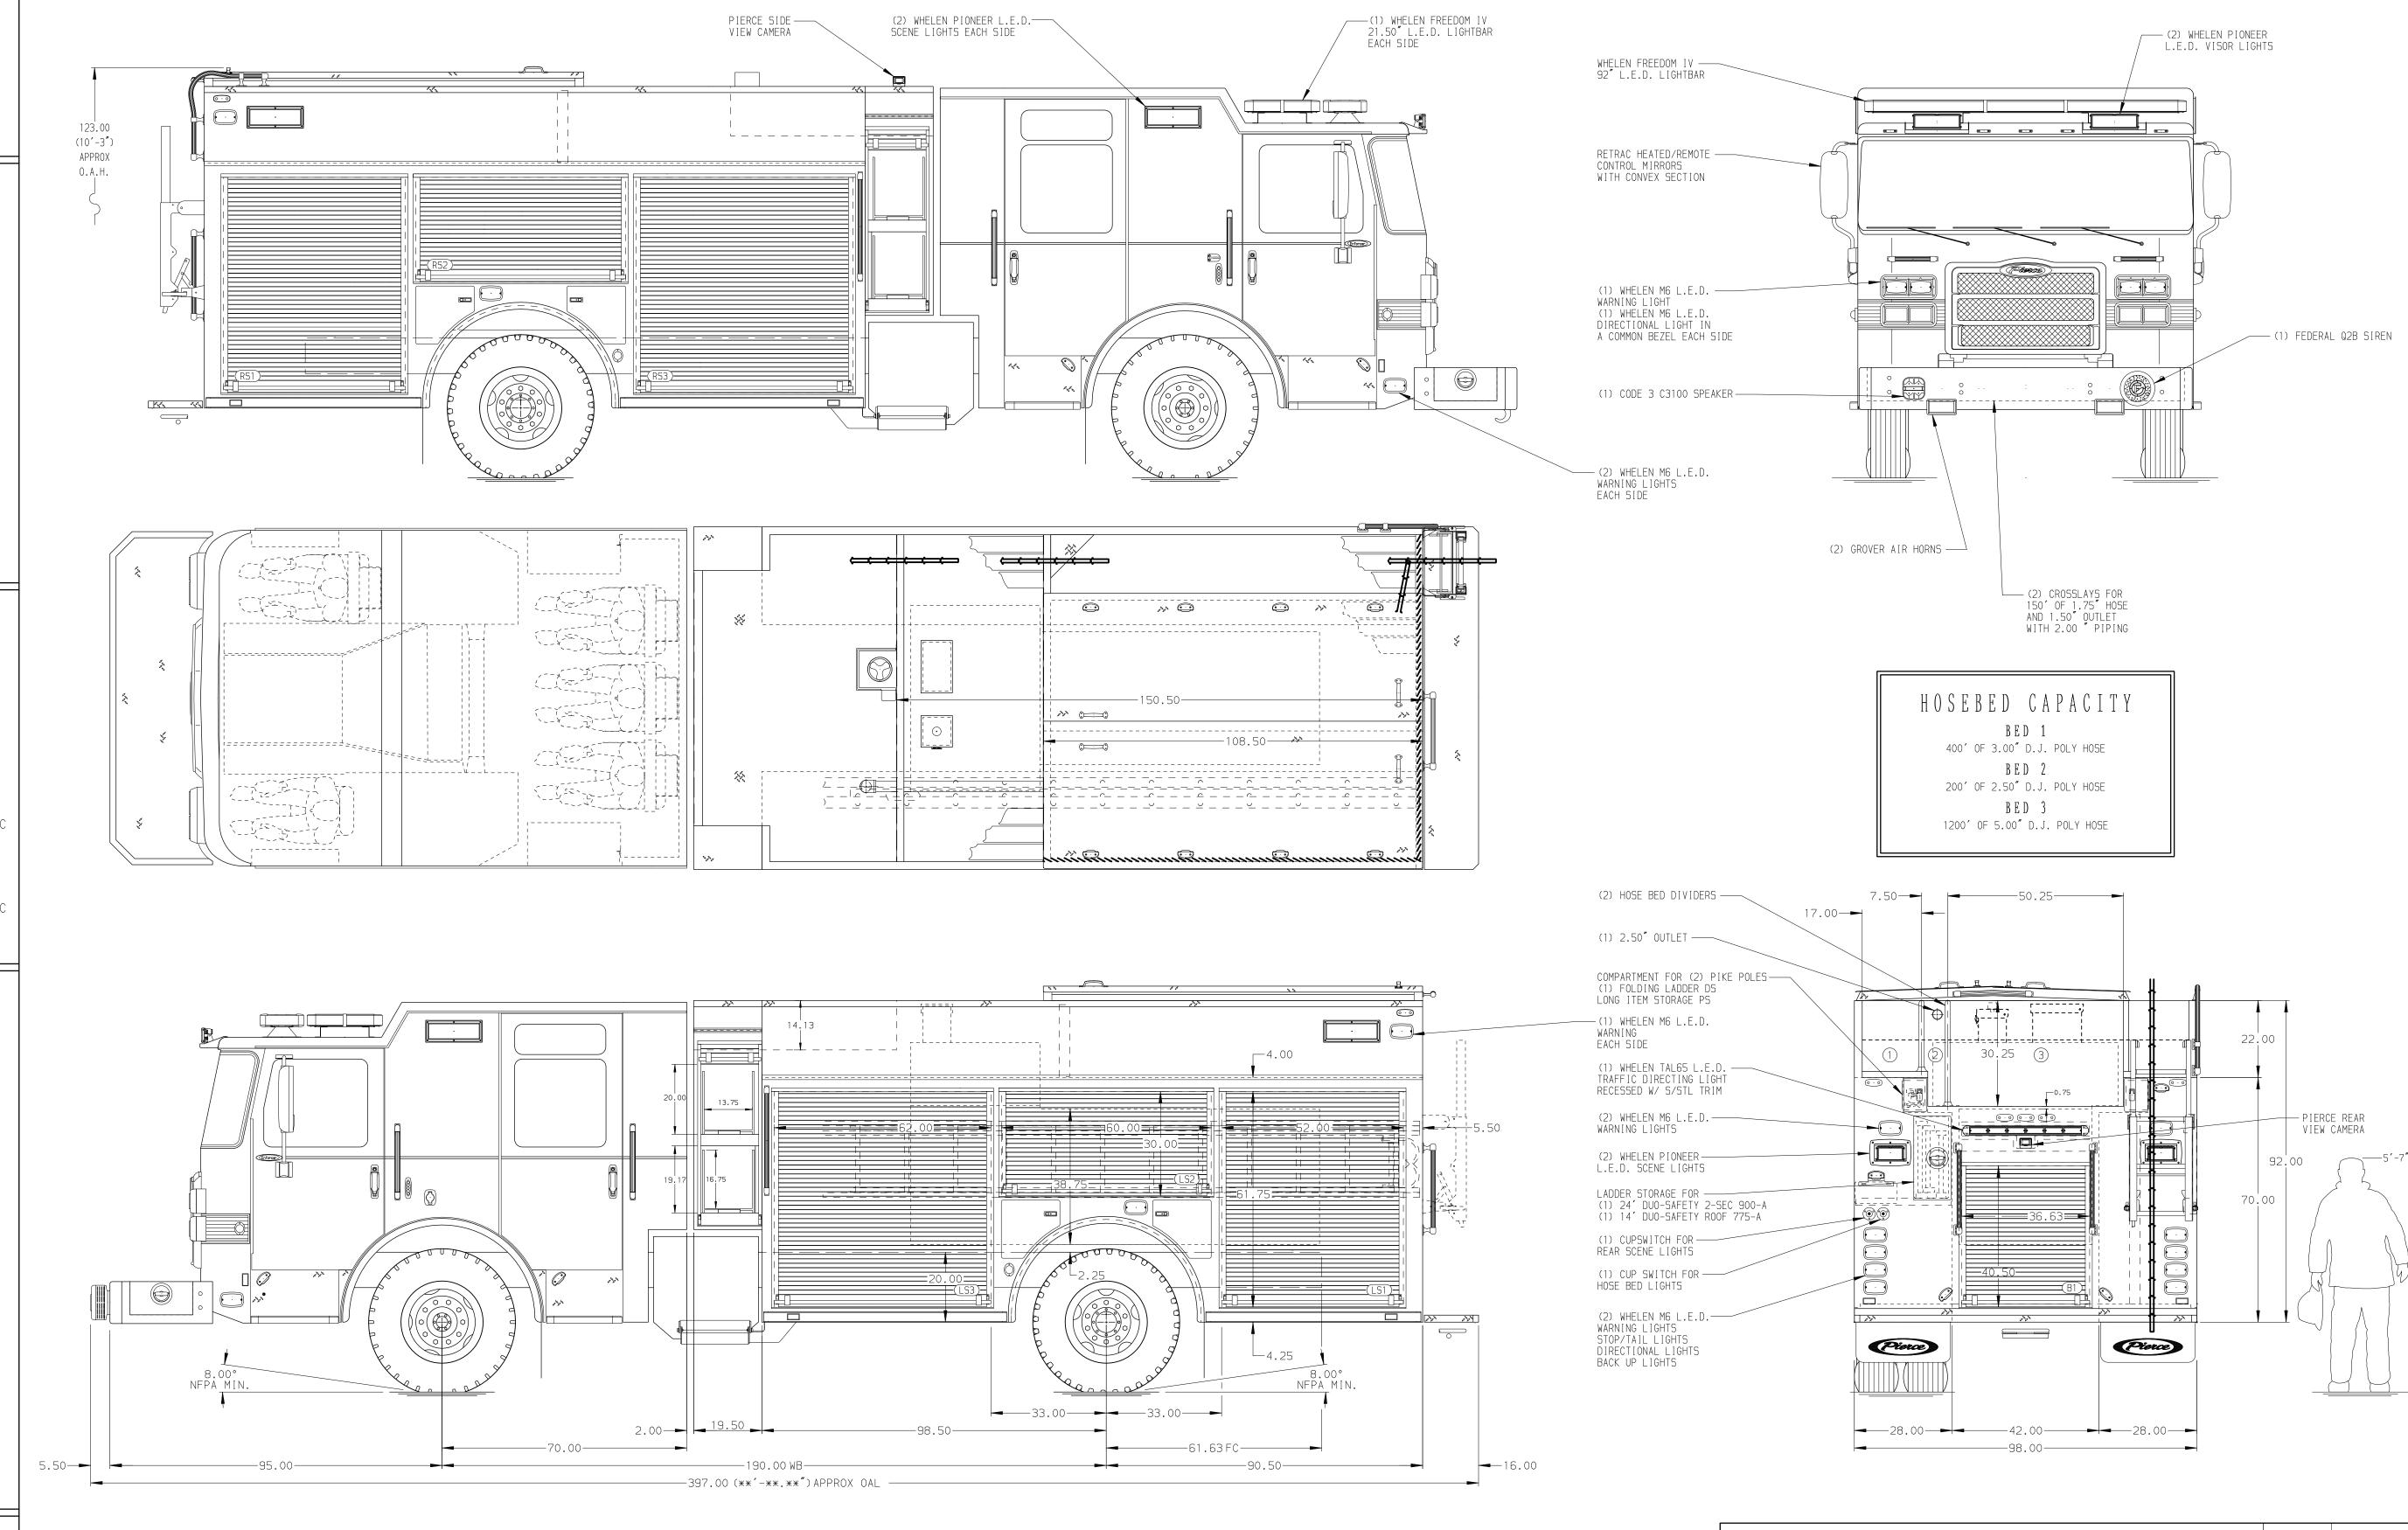

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.

MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF CAB 2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER

10. PARTITIONS BETWEEN COMPARTMENTS LS1/B1 11. THREE 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER 12. ONE 120V 6-PLACE RECEPTACLE LOCATED PER SHOP ORDER

4. NINE ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER
6. ONE SLIDE-OUT TOOLBOARD LOCATED PER SHOP ORDER ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER 8. PAC TRAC LOCATED PER SHOP ORDER

9. TWO VERTICAL PARTITIONS LOCATED PER SHOP ORDER

MANUFACTURING INC. SCALE DATE 1:24 DRAWN BY Pierce PUC Pumper Approval Packet CHASSIS DATA 04N0V19 COL MAKE CHECKED BY West Manatee Fire Rescue 04N0V19 KB0 B | 20DEC19 | COL | KBO PIERCE SHEET SIZE MODEL SHEET NO. 19N0V19 COL KBO DWG 34575AD REV DATE BY CH ENFORCER NO.

JOB NO. 34575