

Enforcer Chassis

24,000 Lb Dana Axle

450 HP Cummins L9 Engine

ALLison 5th Gen. 3000 EVS P

19" Extended Painted Steel

6010 Enforcer Cab

30.75" FF Lap Rear Comput

152" RollUp Full Height Front & Rear FDLER

152" Rollup Full Height Front & Rear FDI FR

1500 GPM Waterous CSI

(2) 1.50" Standard Capacity

2 50" Crosslay Not Required





Speedlabs Not Required

Generator Not Required

Hucku 3 Signal Agent Foam System


20 Gallon Foam Cell - Reduced Water

129.00
(10'-9"
APPROX
O A H

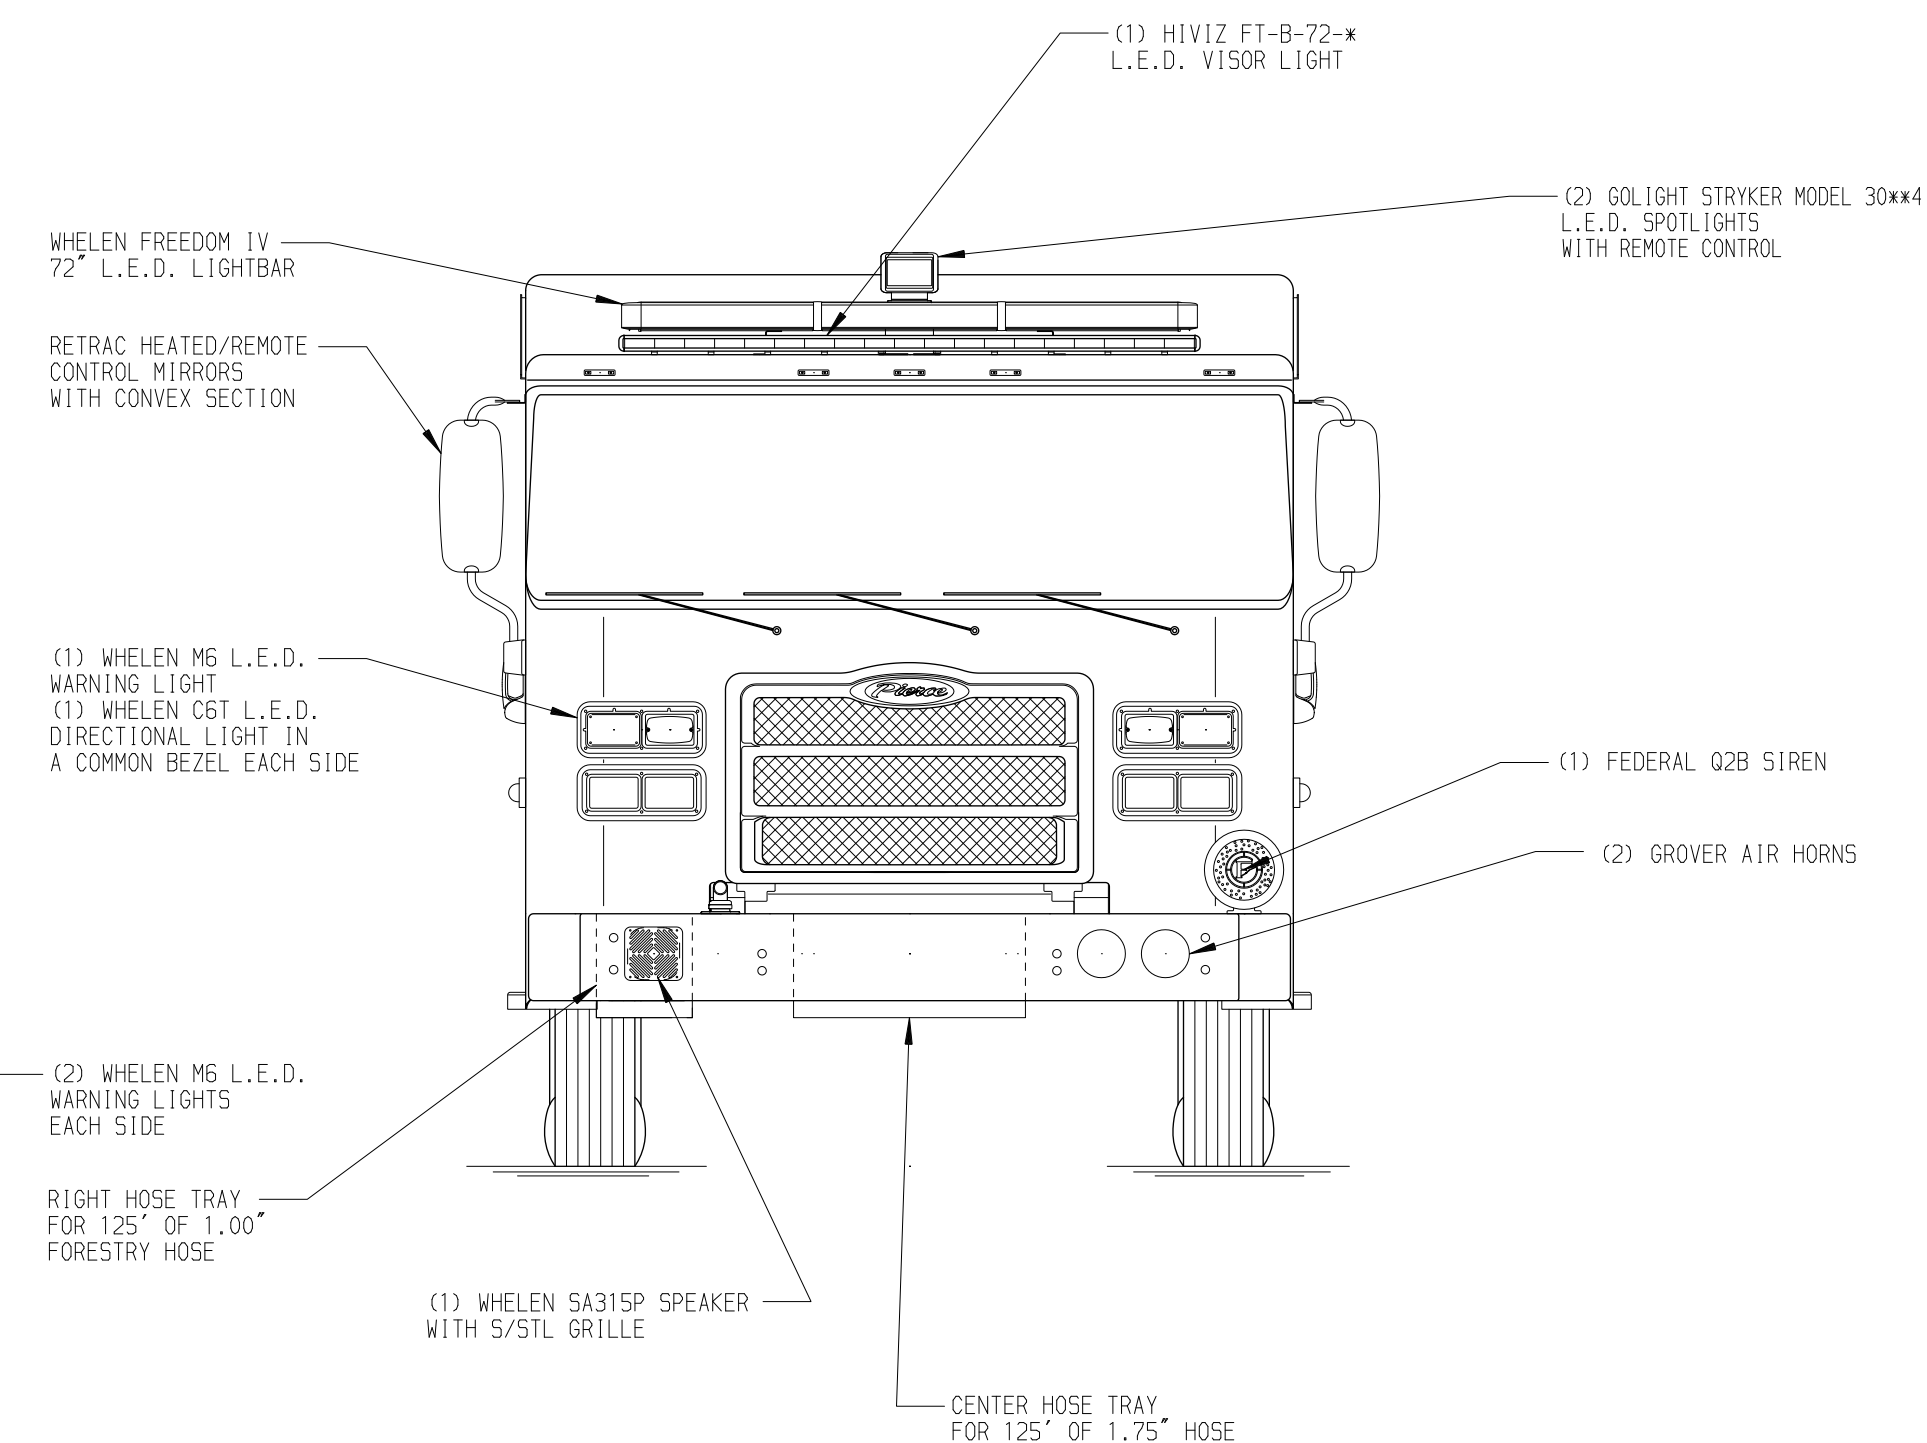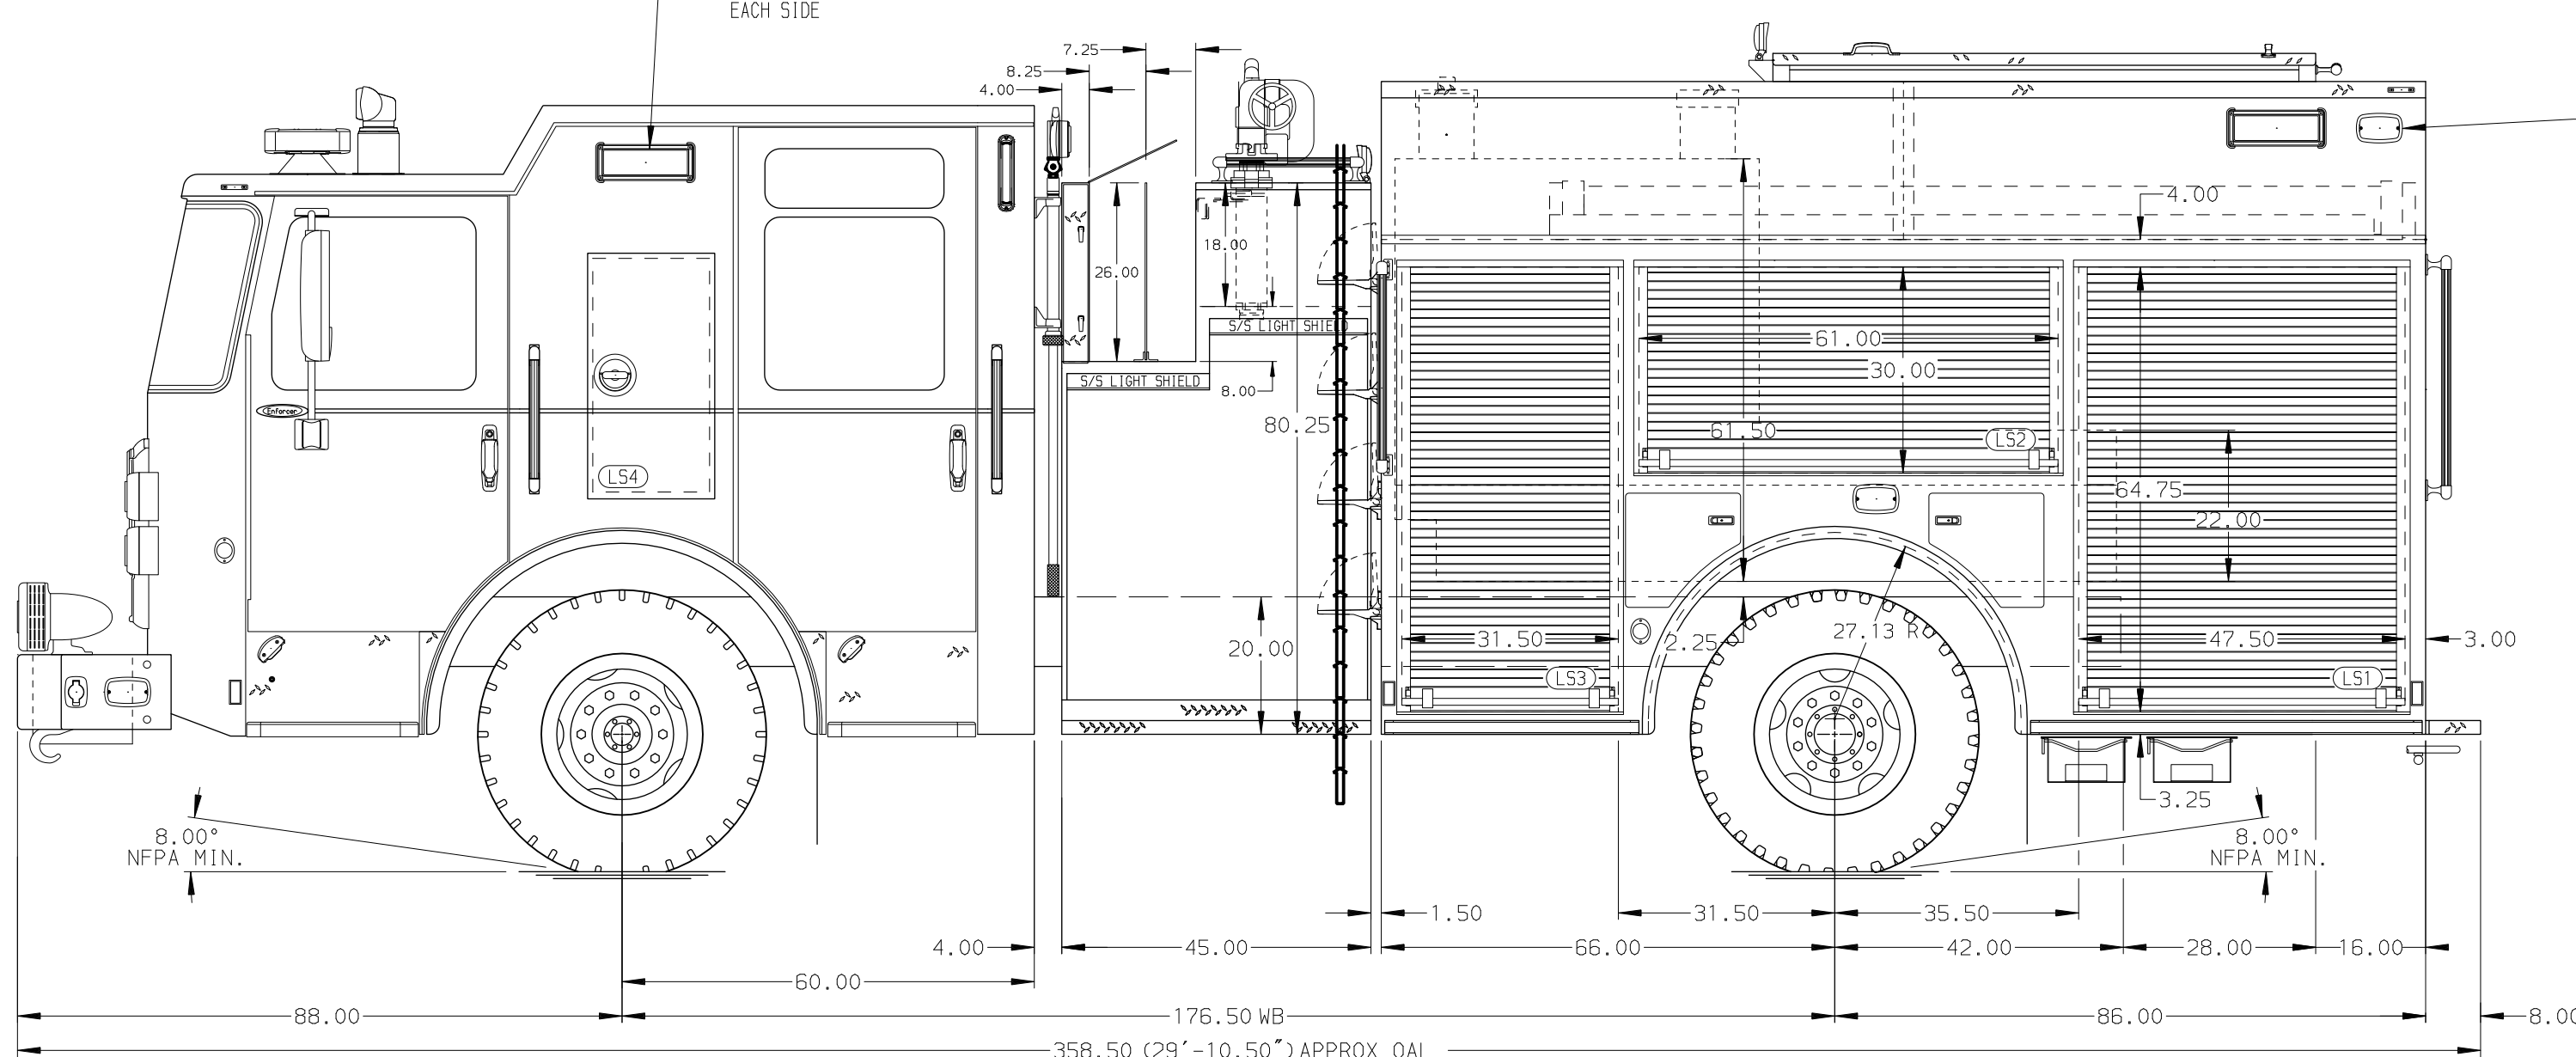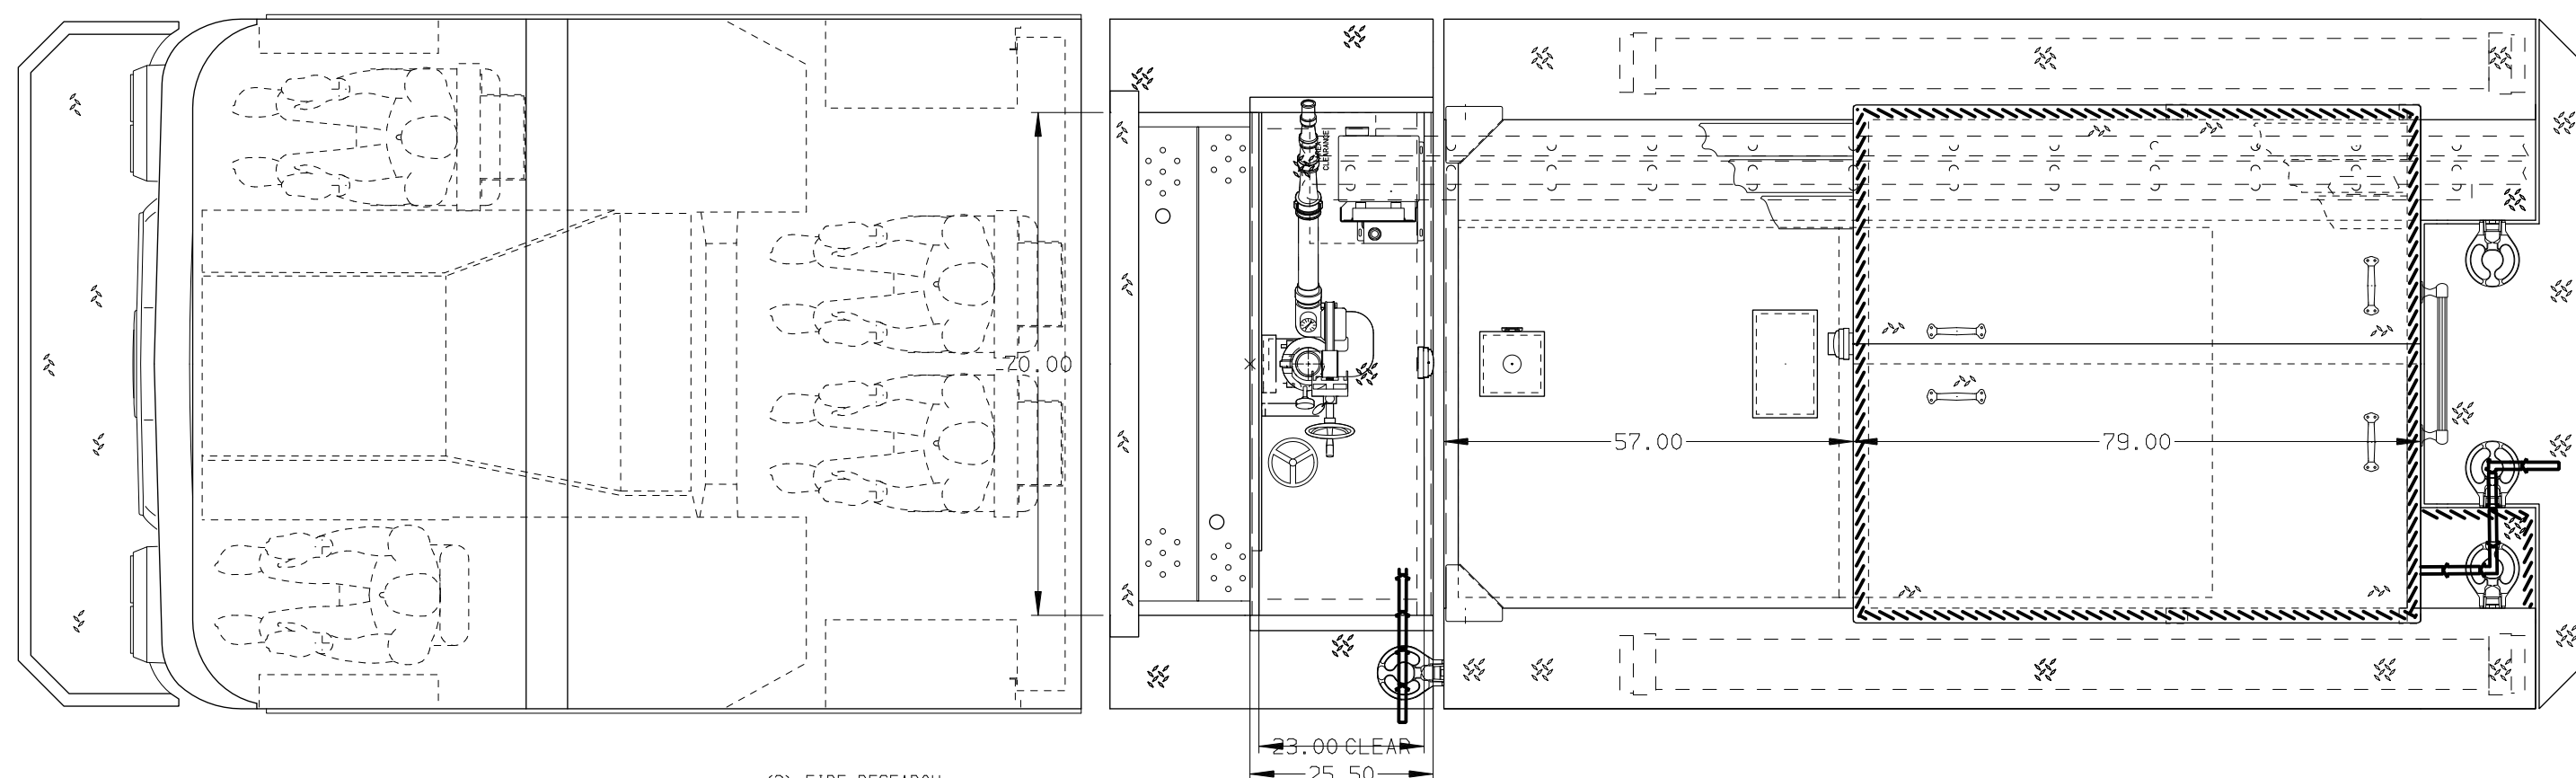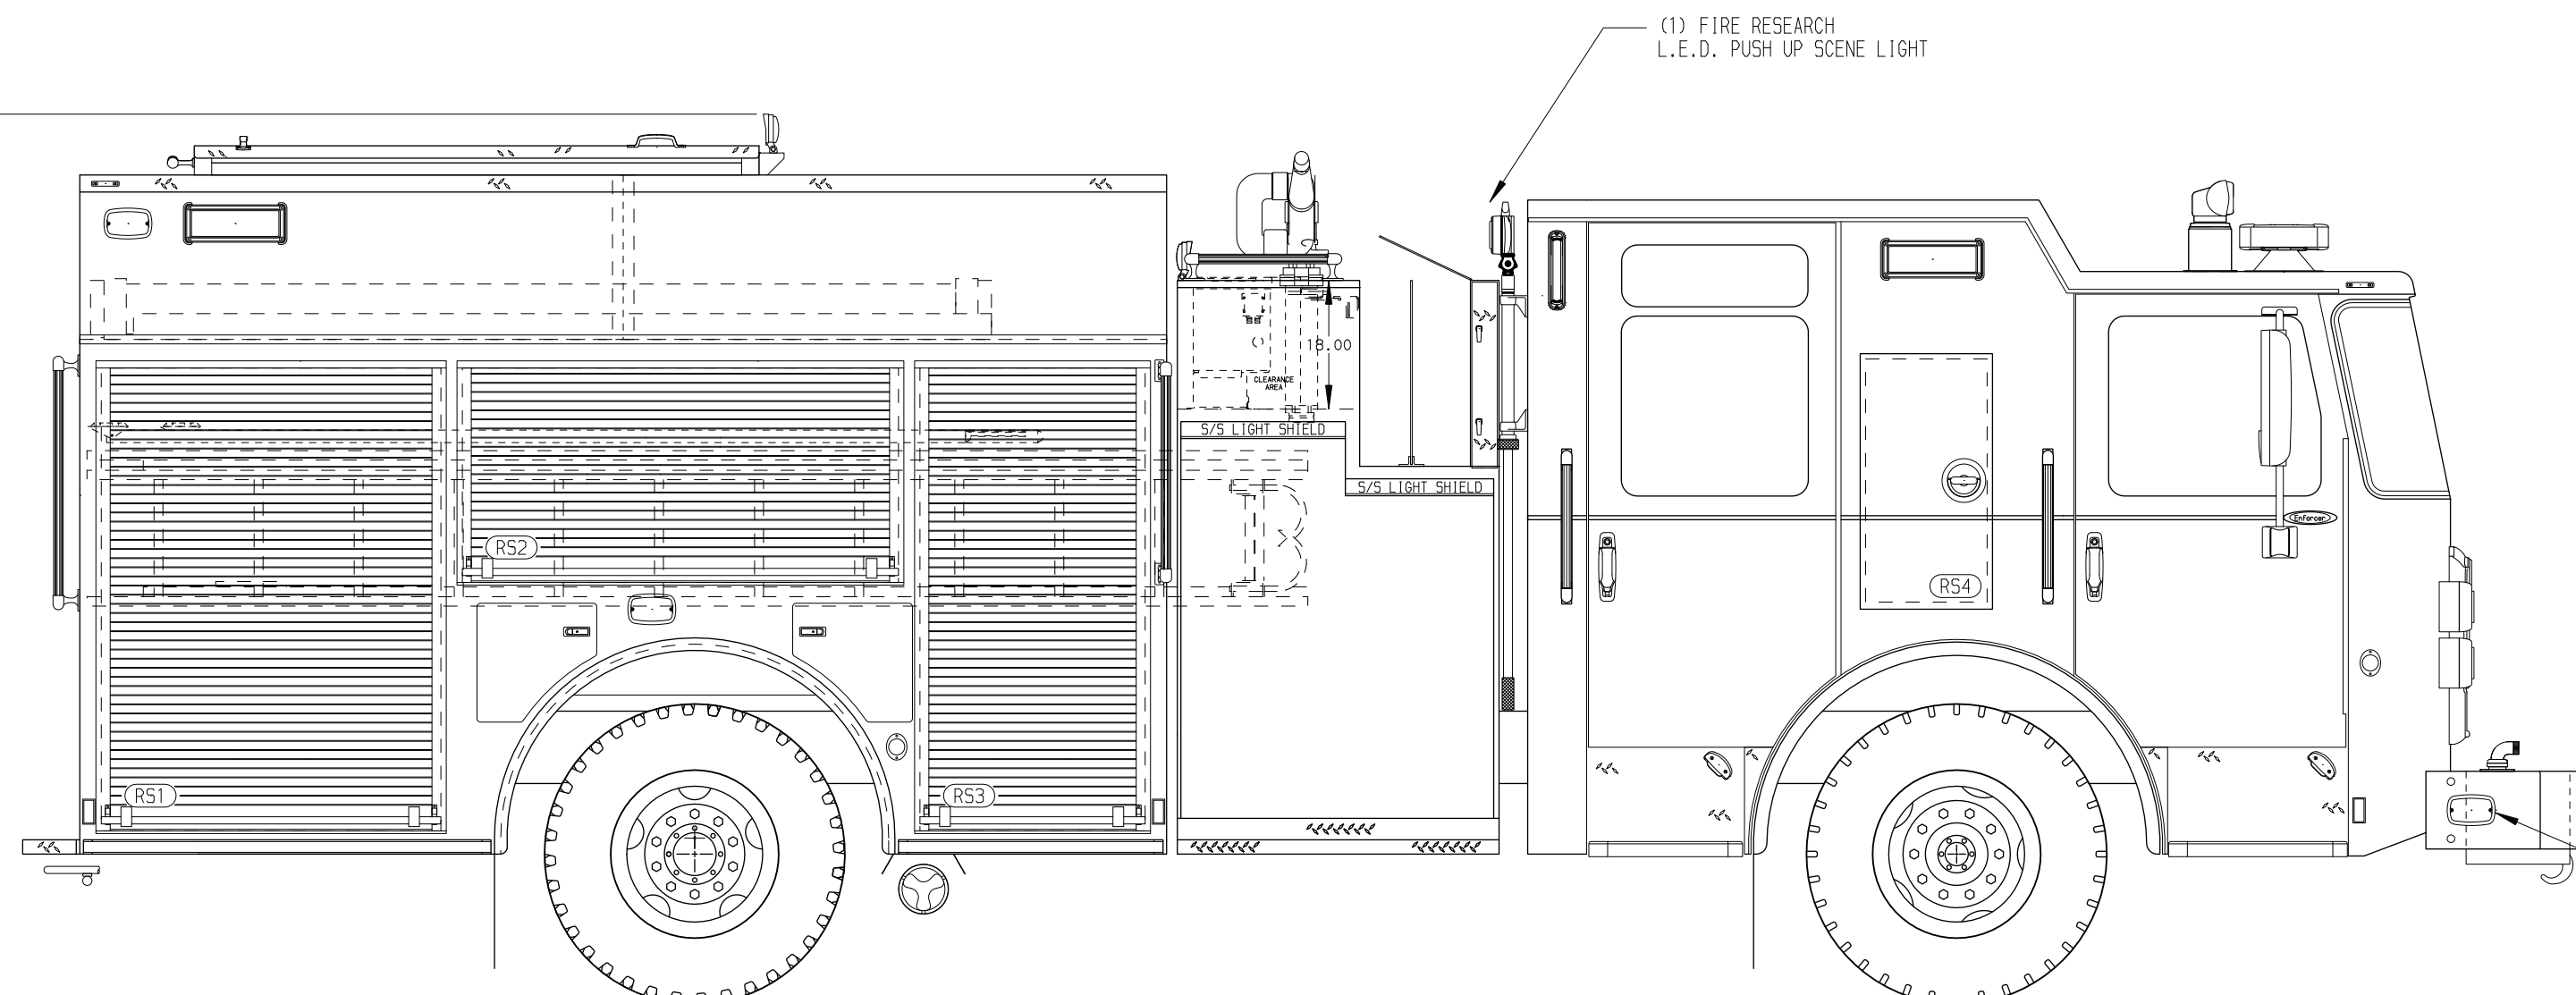

HOSEBED CAPACITY

BED 1
300' OF 1.75" D.J. POLY HOSE
BED 2
400' OF 2.50" D.J. POLY HOSE
BED 3
1000' OF 5.00" D.J. POLY HOSE
BED 4
400' OF 2.50" D.J. POLY HOSE

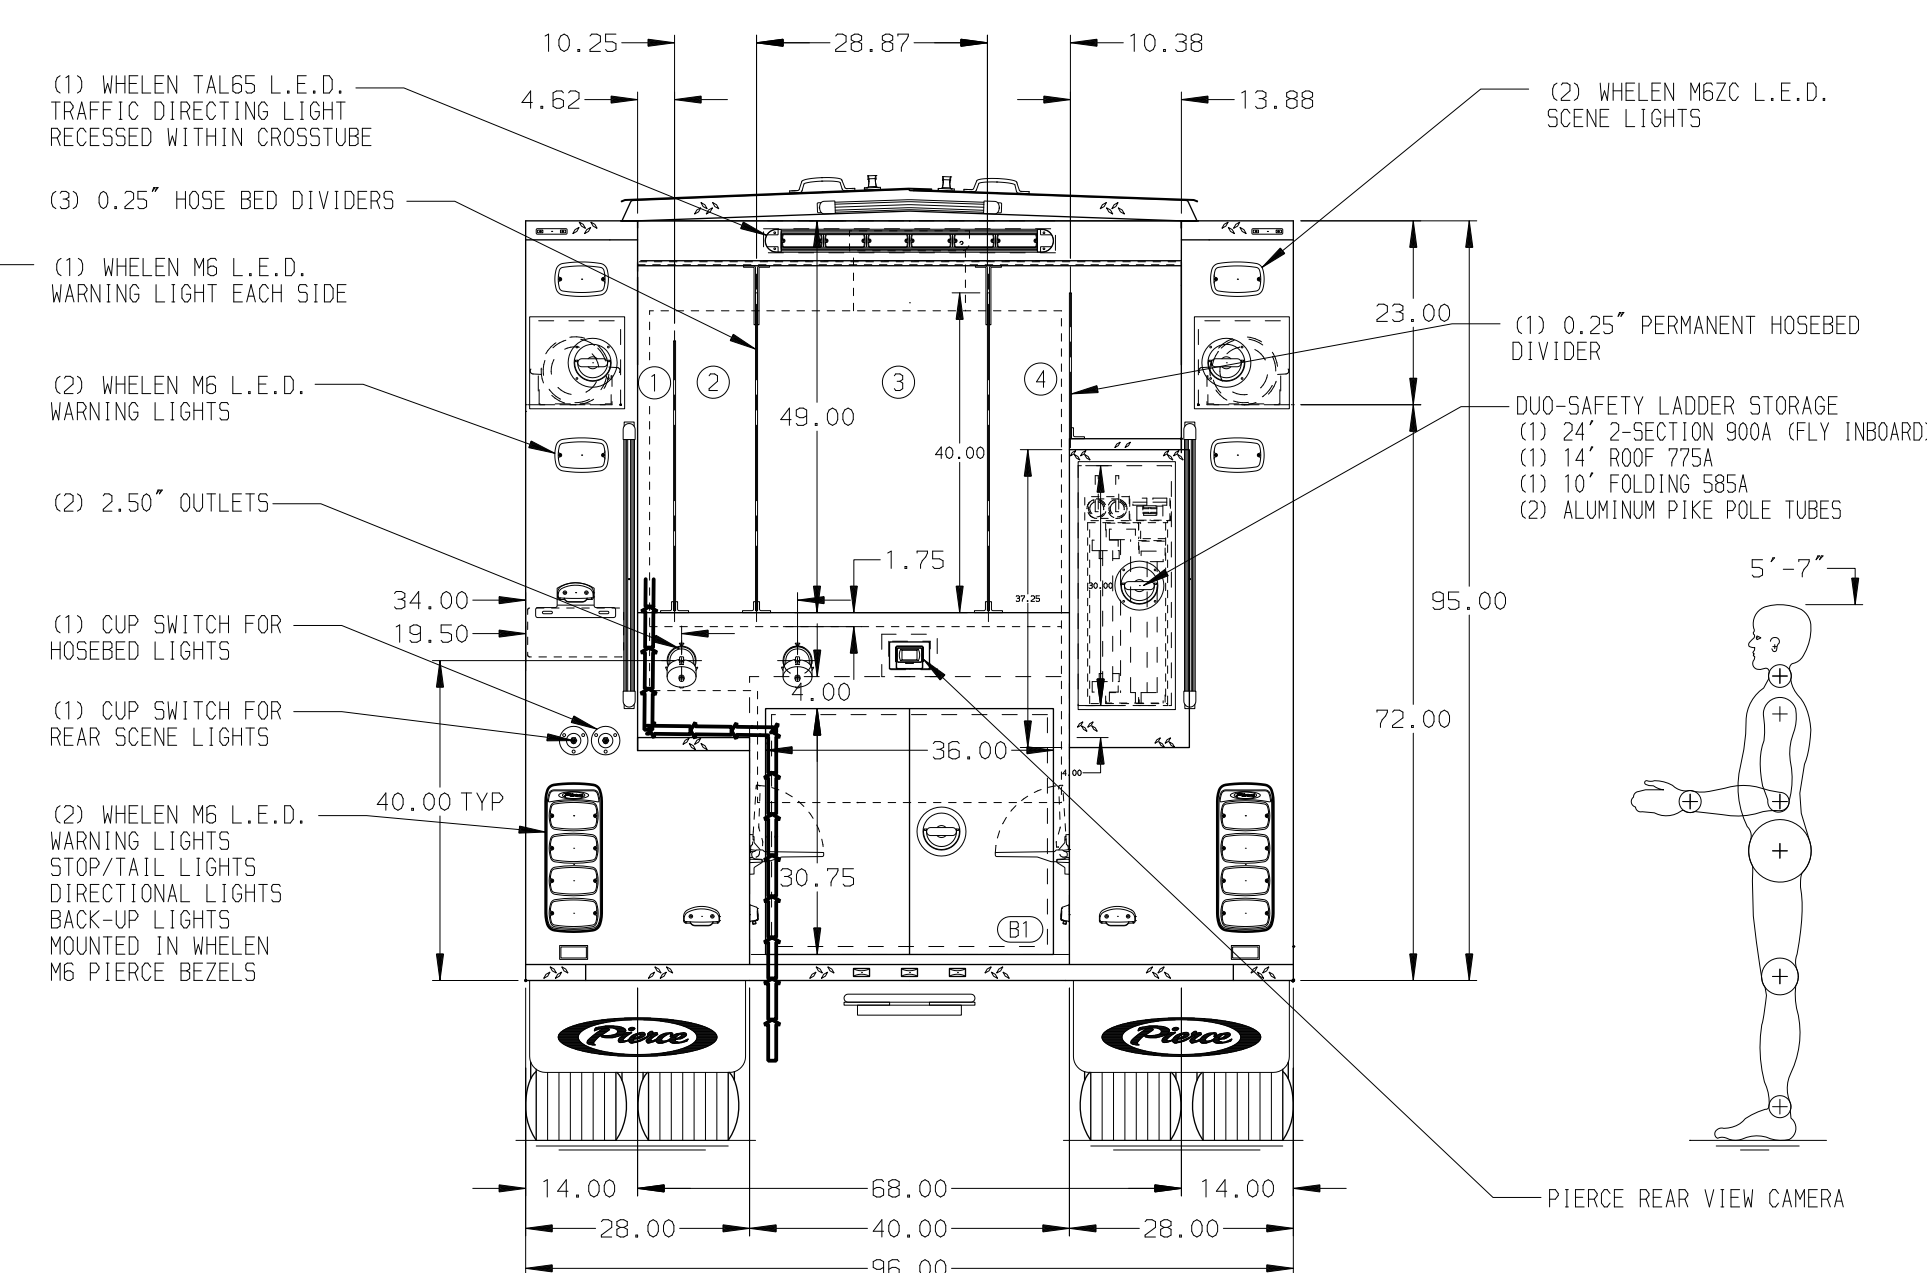

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP BUMPER RIGHT SIDE
2. SHORELINE RECEPTACLE WITH KUSMAUL SWING AUTO-EJECT LOCATED ON DRIVER SIDE BUMPER EXTENSION
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPPLE
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT Riser
6. NINE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. TWO SLIDE MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS PER SHOP ORDER
8. TWO SLIDE-OUT TRAYS LOCATED IN COMPARTMENTS PER SHOP ORDER
9. ONE SWING-OUT TOOLBOARD LOCATED IN COMPARTMENT PER SHOP ORDER
10. HORIZONTAL EQUIPMENT MOUNTING TRACKS LOCATED IN COMPARTMENT PER SHOP ORDER

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	DRAWN BY	
				MAKE		-	MMF	29MAR21
	16JUL21	MMF	COL	PIERCE	FOR	Boardman Fire Rescue District	CHECKED BY	29MAR21
	25MAY21	MMF	COL	MODEL	DWG			
REV	DATE	BY	CH	ENFORCER	NO.	36212AD	SHEET SIZE	SHEET NO.
							D	1 of 1