PUMPER BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

20,000 lb Dana Axle

AXLE, REAR 27,000 lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

22" Extended Painted Steel Underslung

CAB

7010 Enforcer Cab

BODY

WATER TANK

900 Gallon Poly Water Tank

COMPT, PUMPER, REAR 51.25″ FF Rollup Rear Compt

COMPT, PUMPER, DRIVER SIDE

161" Rollup Full Height Front & Rear FDLER

COMPT, PUMPER PASS. SIDE 161" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

45″ Control Zone Top Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

1.50" Crosslays Not Required

CROSSLAYS, 2.50" 2.50" Crosslay Not Required

SPEEDLAYS

(2) 1.50" W/Tray Std. Capacity


GENERATOR

Generator Not Required

Foam System Husky 12 Single Agent Foam System

Foam Cell

20 Gallon Foam Cell, Not Reduced Water

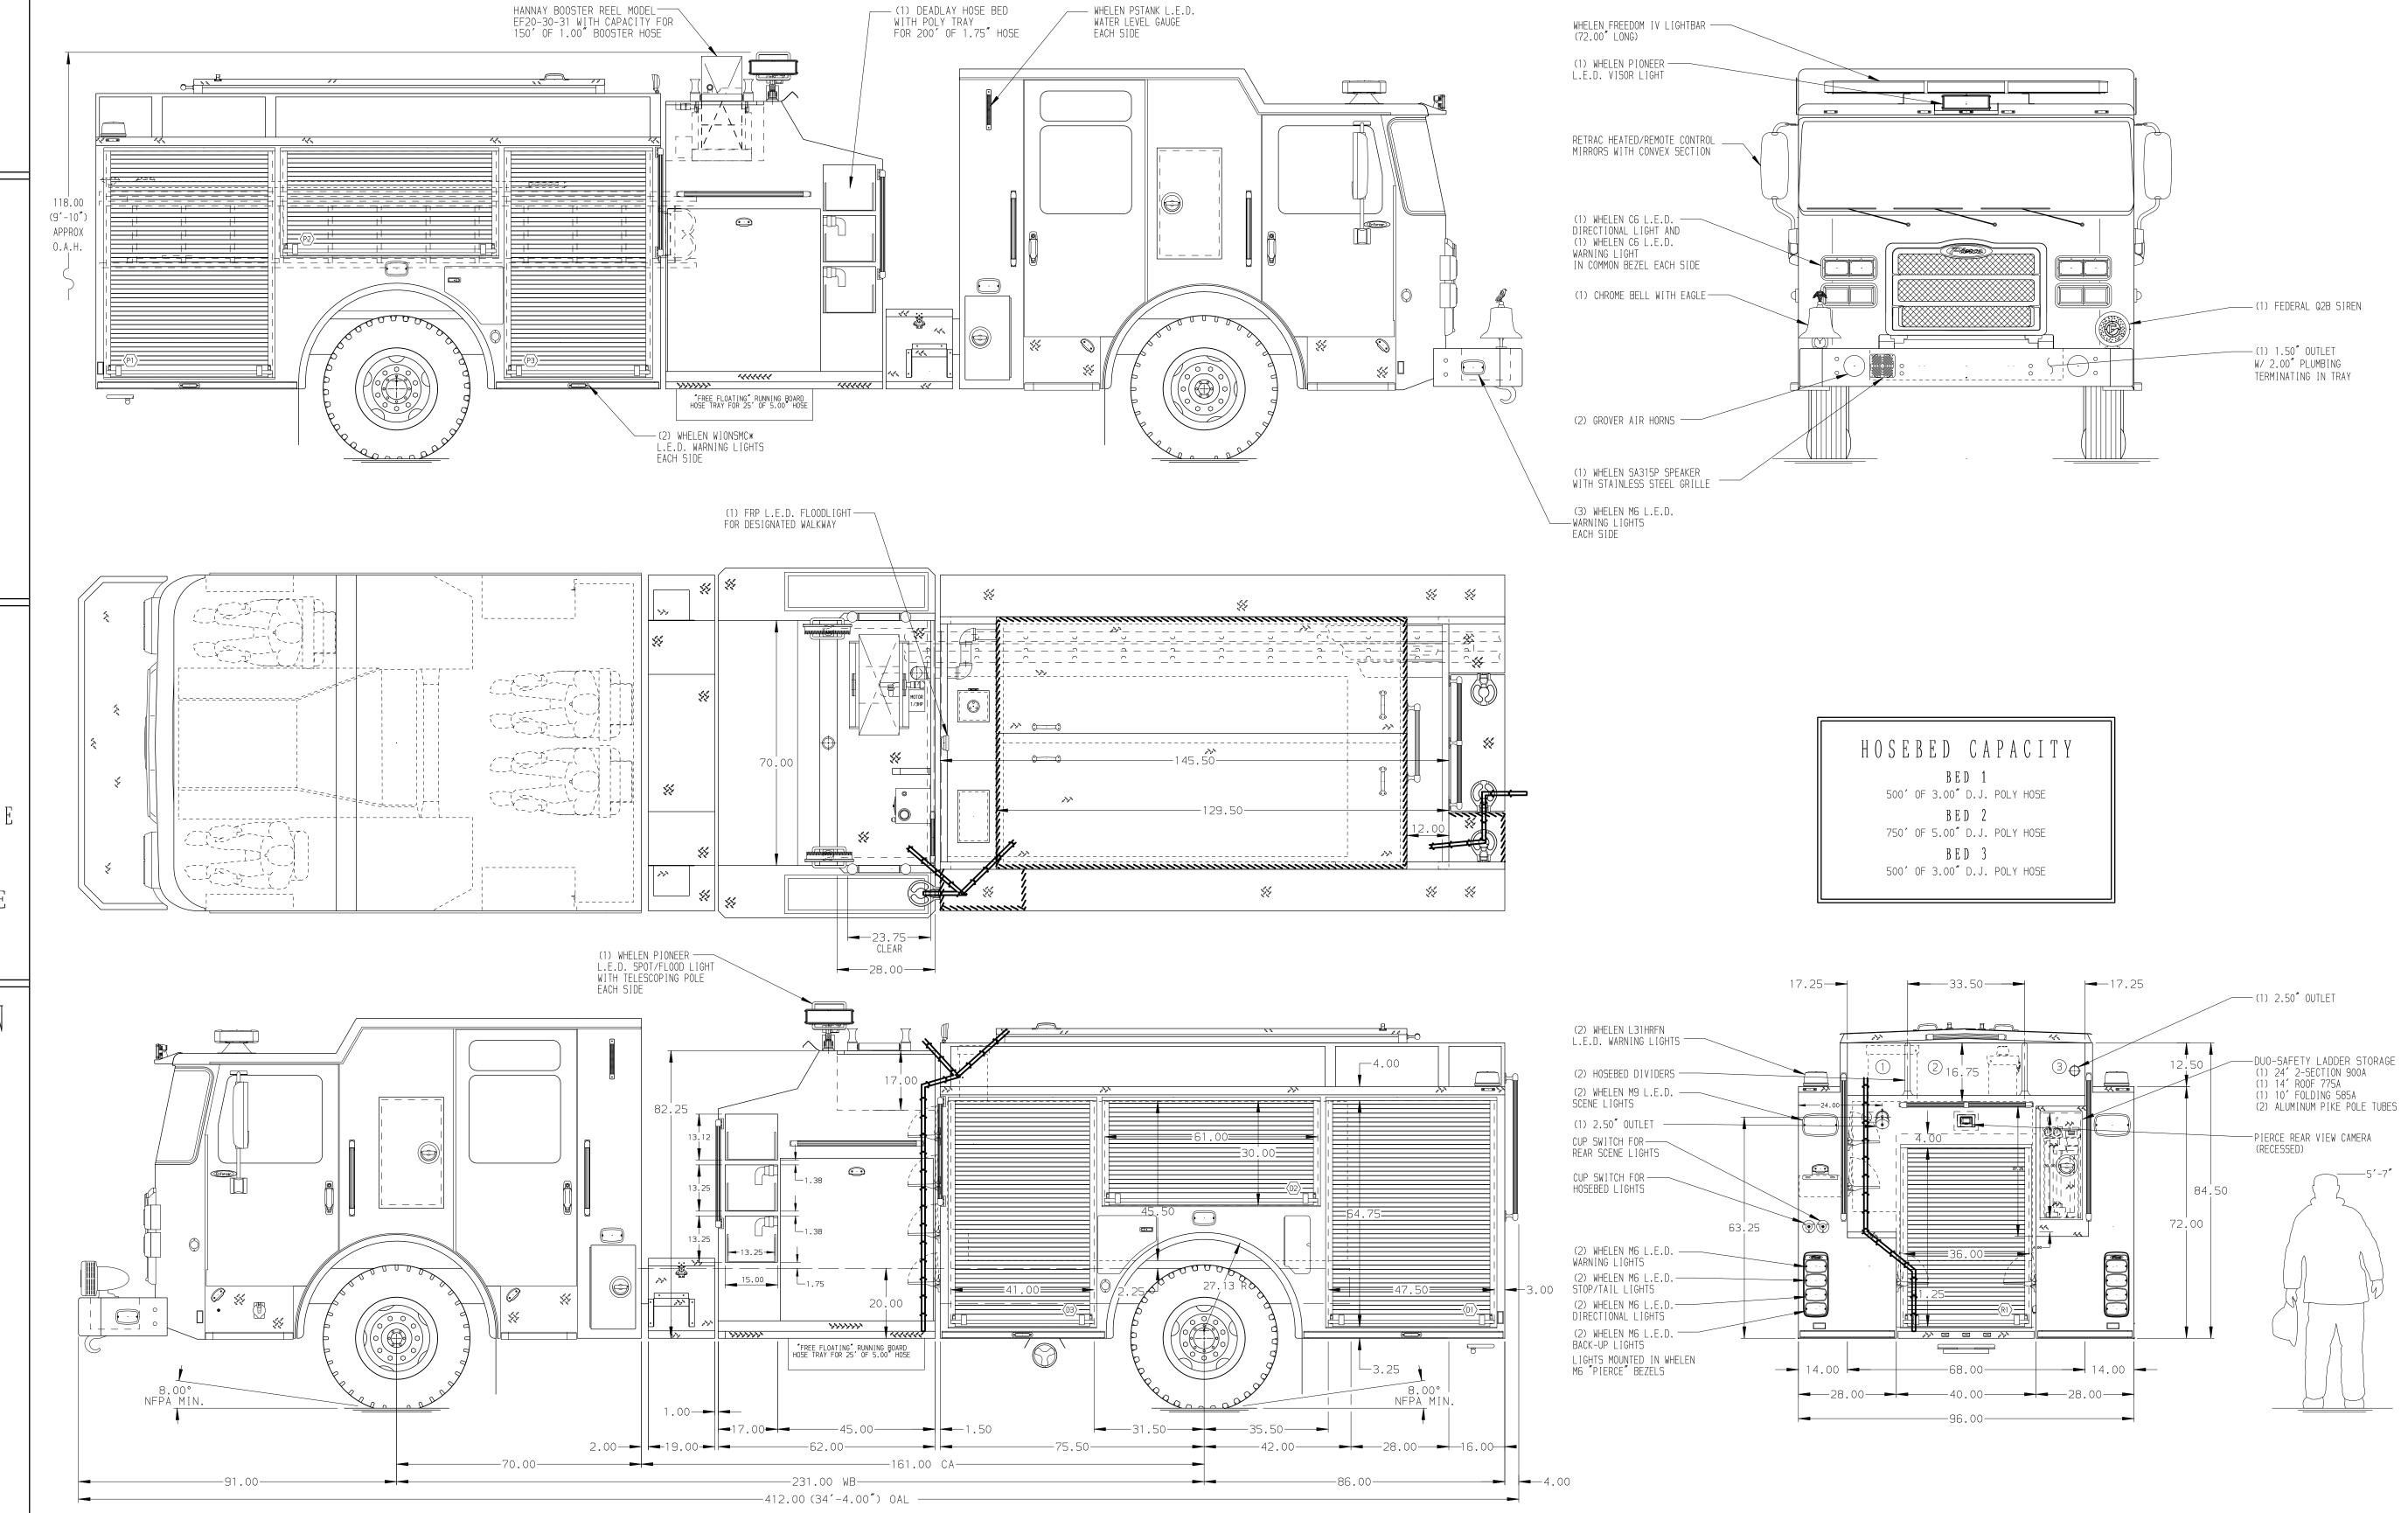

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

. BATTERY CHARGER LOCATED IN COMPARTMENT D3 . BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER 3. SEVEN ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
3. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
4. ONE ALUMINUM SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER AIR INLET W/ DISCONNECT COUPLING LOCATED IN DRIVER'S STEP AREA AIR OUTLET W/ SHUT OFF VALVE LOCATED ON DRIVER'S SIDE PUMP PANEL 120V SHORELINE RECEPTACLE LOCATED IN DRIVER'S STEP AREA 8. VANNER BRAVO 1050W POWER INVERTER 9. TWO 120V DUPLEX RECEPTACLES LCOATED PER SHOP ORDER

						Pierce MANUFACTURING INC.	JOB NO.	32208
						Pierce MANUFACTURING INC.	SCALE 1:24	DATE
				CHASSIS DATA	TITLE	PIERCE PUMPER APPROVAL DRAWING -	DRAWN BY	01DEC17
B/	26MAR18	COL	KB0	MAKE PIERCE	FOR	VENICE FIRE DEPARTMENT -	CHECKED BY	04DEC17
DEV	22FEB18	COL	KB0	MODEL	DWG	3220840	SHEET SIZE	SHEET NO.
REV	DATE	ВҮ	СН	ENFORCER	NO.	JZZUOAD		1 of 1