


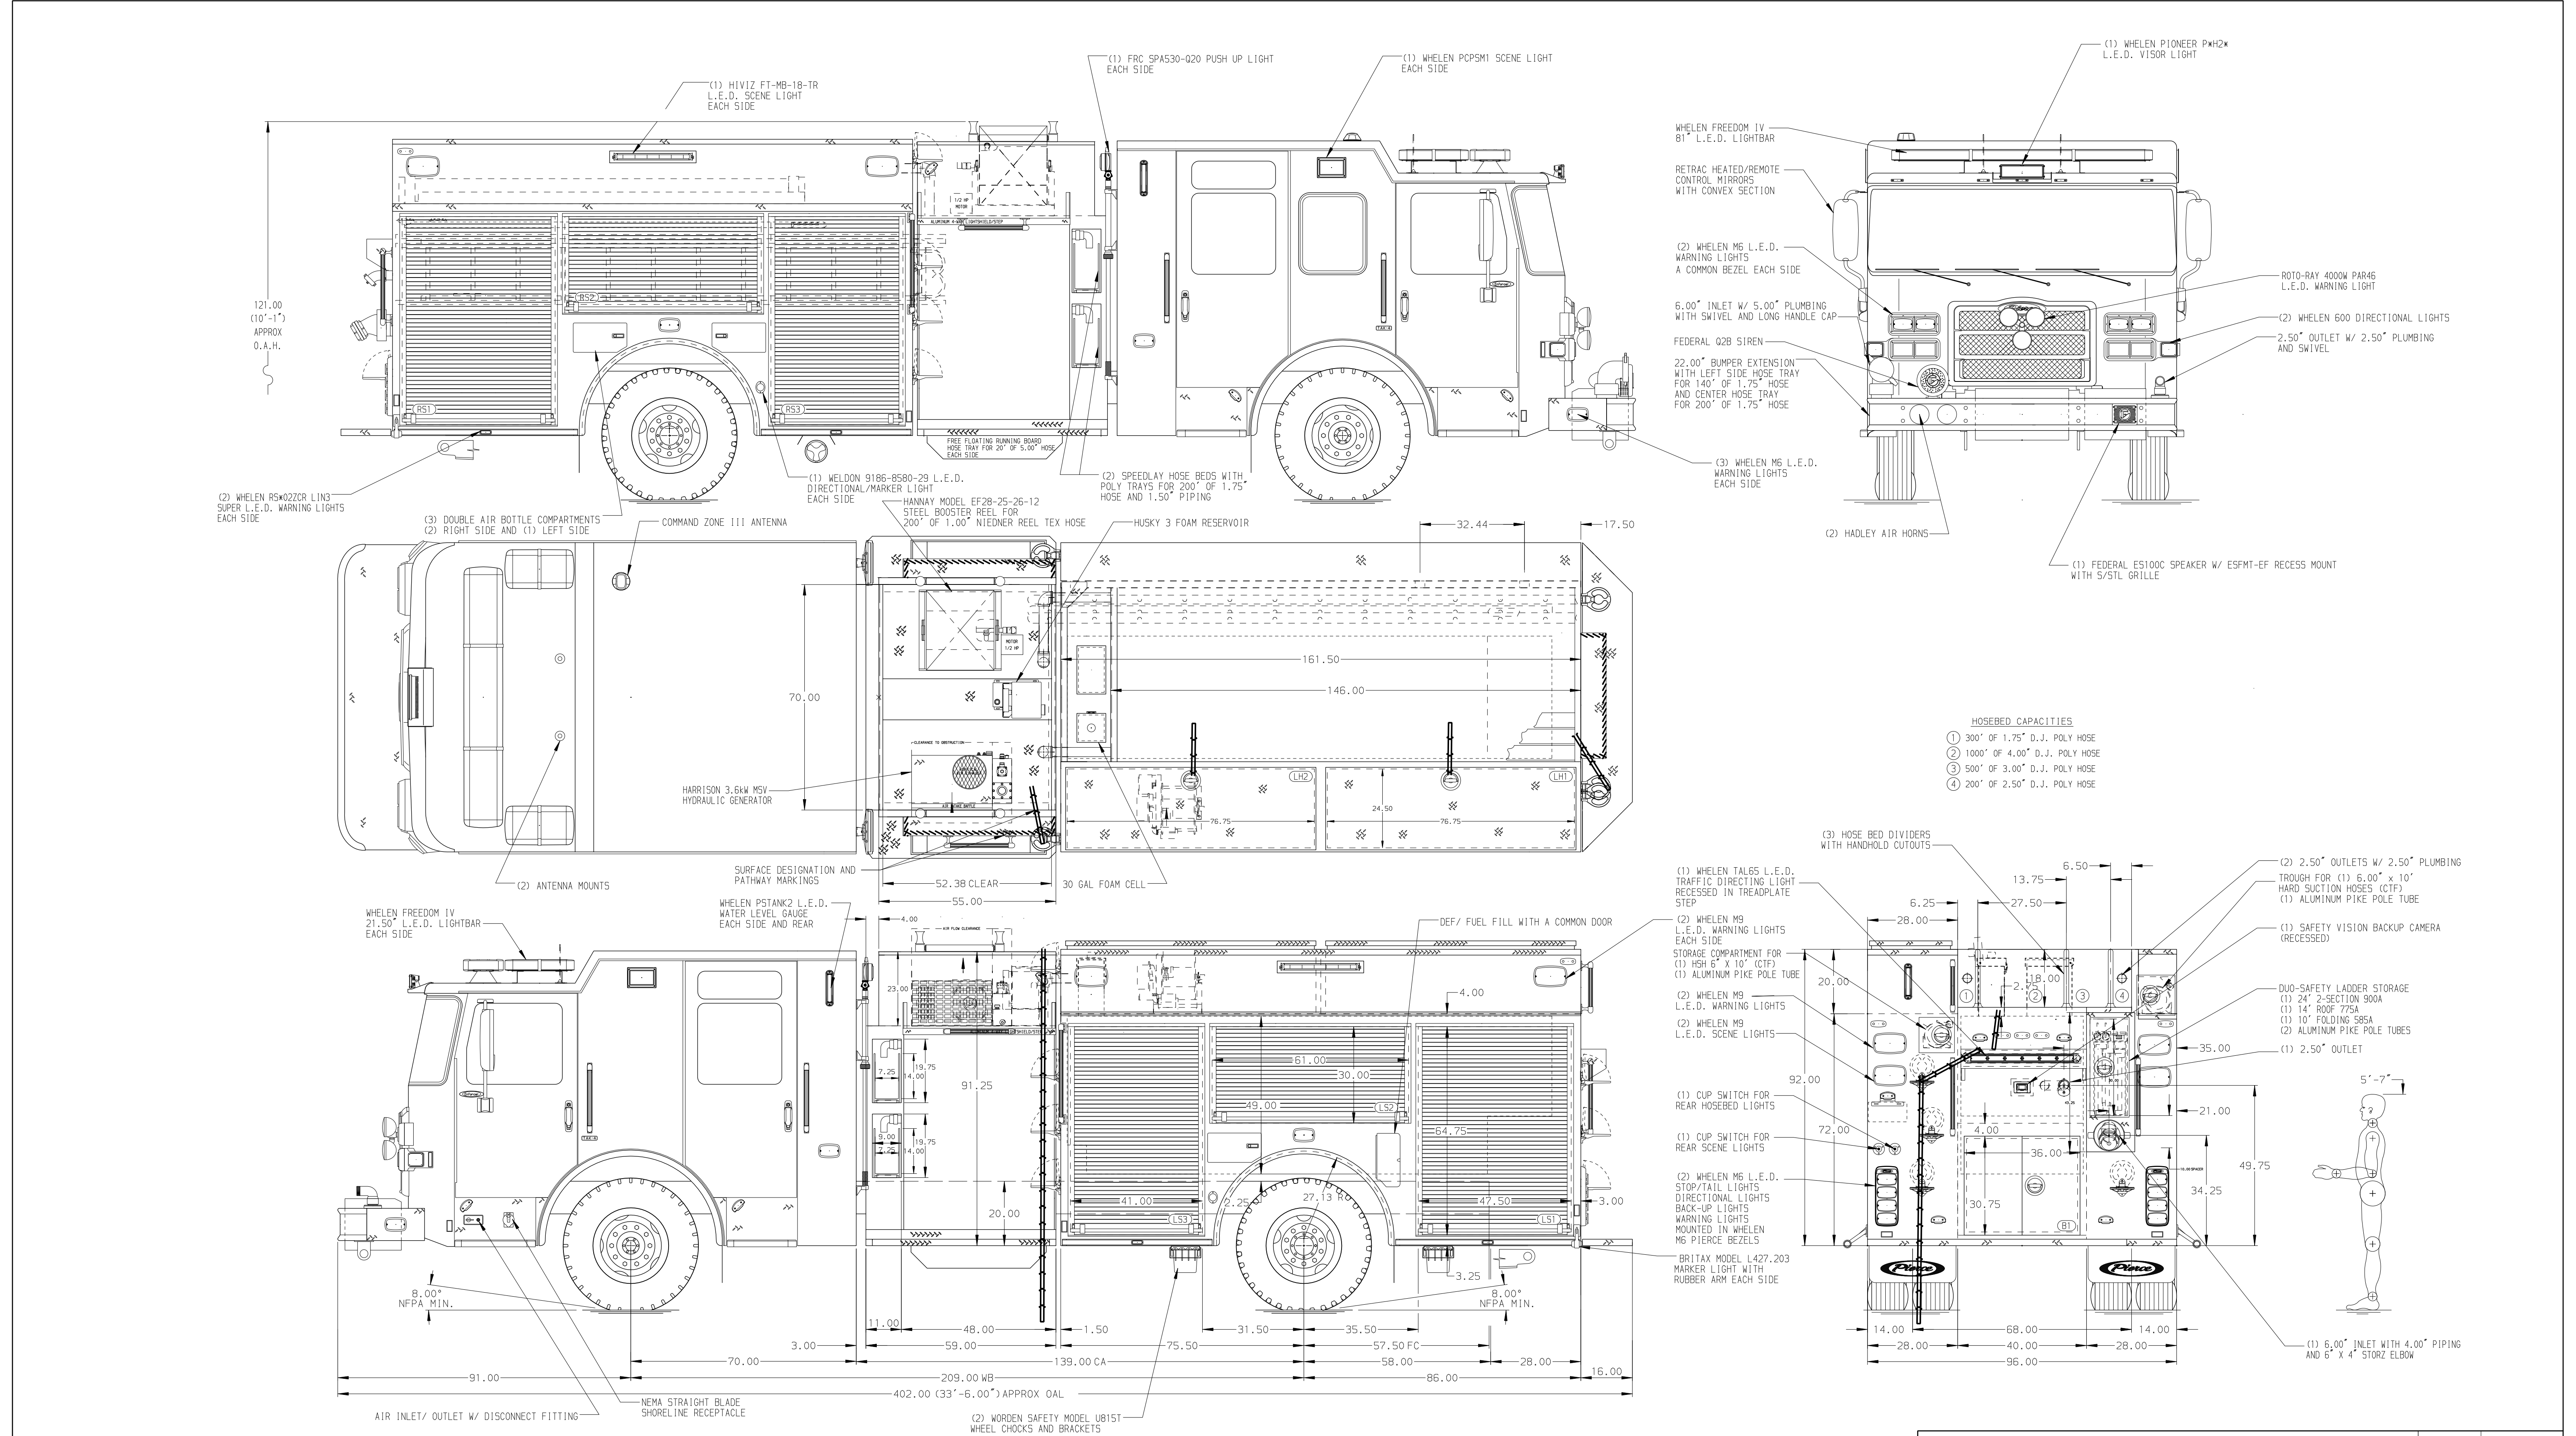

 MANUFACTURING INC.		JOB NO.	38383
SCALE 1:24		DATE	
DRAWN BY LST		CHECKED BY CDU	11JAN23
SHEET SIZE D		SHEET NO.	1 OF 1

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. RUD AUTOMATIC TIRE CHAINS TO BE PROVIDED AT THE REAR
2. BATTERY CHARGER INDICATOR LOCATED IN THE CAB PER SHOP ORDER
3. BATTERY CHARGER LOCATED IN THE CAB PER SHOP ORDER
4. NINE ADJUSTABLE FULL WIDTH/ DEPTH SHELVES LOCATED PER SHOP ORDER
5. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
6. TWO SWING-OUT ALUMINUM TOOL BOARDS LOCATED PER SHOP ORDER
7. THREE SLIDE-OUT ALUMINUM TOOL BOARDS WITH PEGBOARD LOCATED PER SHOP ORDER
8. TWO VERTICAL PARTITIONS LOCATED PER SHOP ORDER
9. PEGBOARD MOUNTED ON THE BACK WALL OF ONE COMPARTMENT PER SHOP ORDER
10. HANNAY MODEL SBEF 34-23-24 BOOSTER REEL FOR 200' OF 1.00" HOSE

11. TWO 6-PLACE RECEPTACLE STRIPS LOCATED IN THE CAB PER SHOP ORDER
12. ONE 4-PLACE 120 V DUPLEX RECEPTACLE LOCATED IN THE BODY PER SHOP ORDER
13. ONE FOUR DRAWER CTECH CABINET LOCATED PER SHOP ORDER
14. ONE VERTICAL PARTITION LOCATED IN THE HATCH PER SHOP ORDER
15. ONE HANNAY MODEL ECR 1618-17-18 ELECTRIC CORD REEL FOR 200' OF 10/3 CABLE IN LH2

17JUL24	LST	CSH	CHASSIS DATA
01MAY24	LST	CSH	MAKE
23APR24	LST	CSH	PIERCE
02APR24	LST	CSH	MODEL
02APR24	LST	CSH	ENFORCER
REV	DATE	BY	CH

TITLE	1500-D-1000P, 970 GAL OF WATER W/ 30 GAL FOAM CELL 161" BODY, LADDERS BTWN. TANK & S. SHEET, (2) SP. LAYS
FOR	FLUVANNA COUNTY PALMYRA, VIRGINIA
DWG NO.	38383AD