

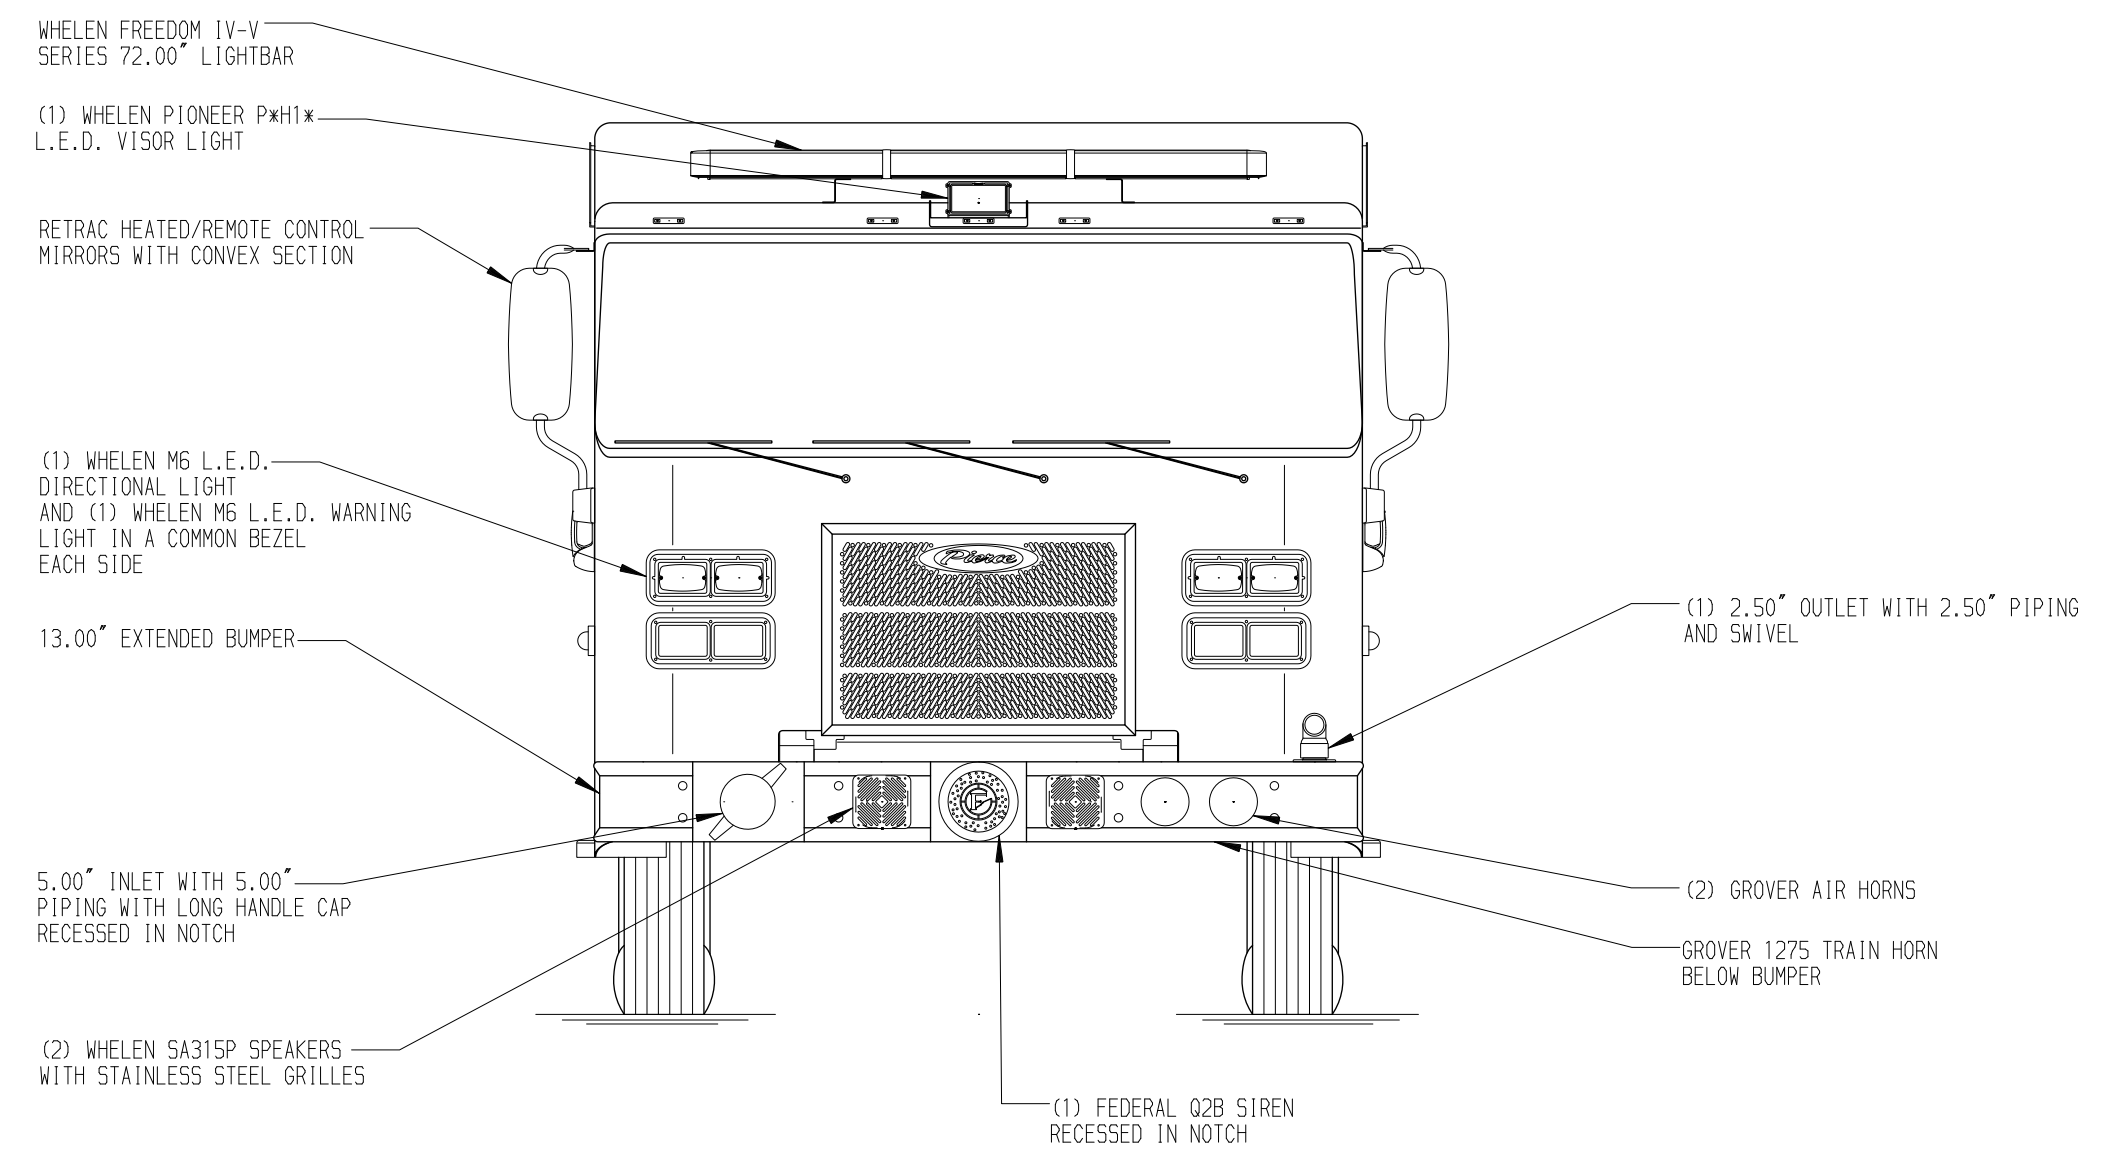
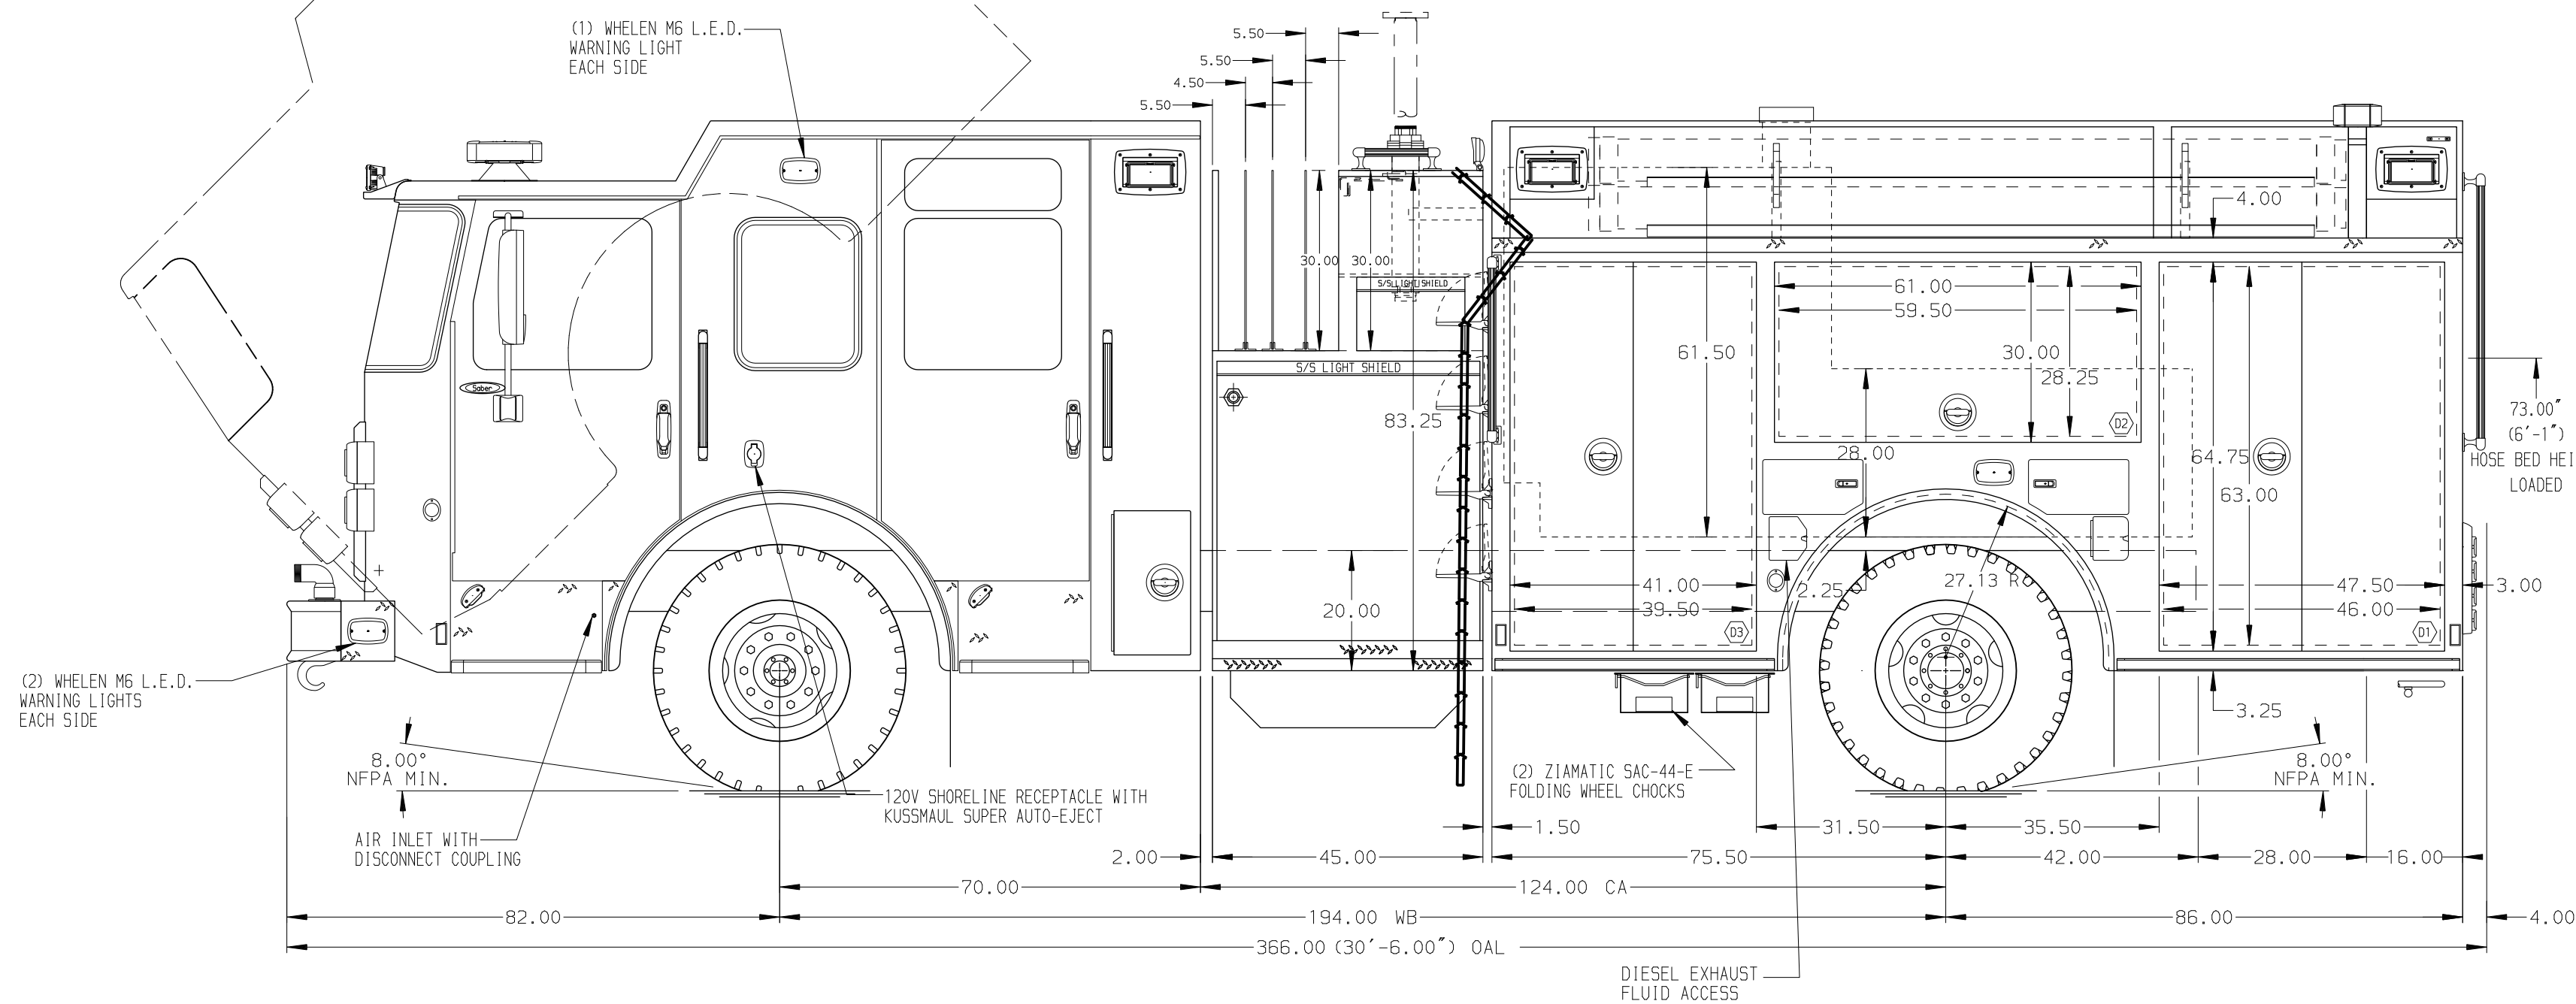
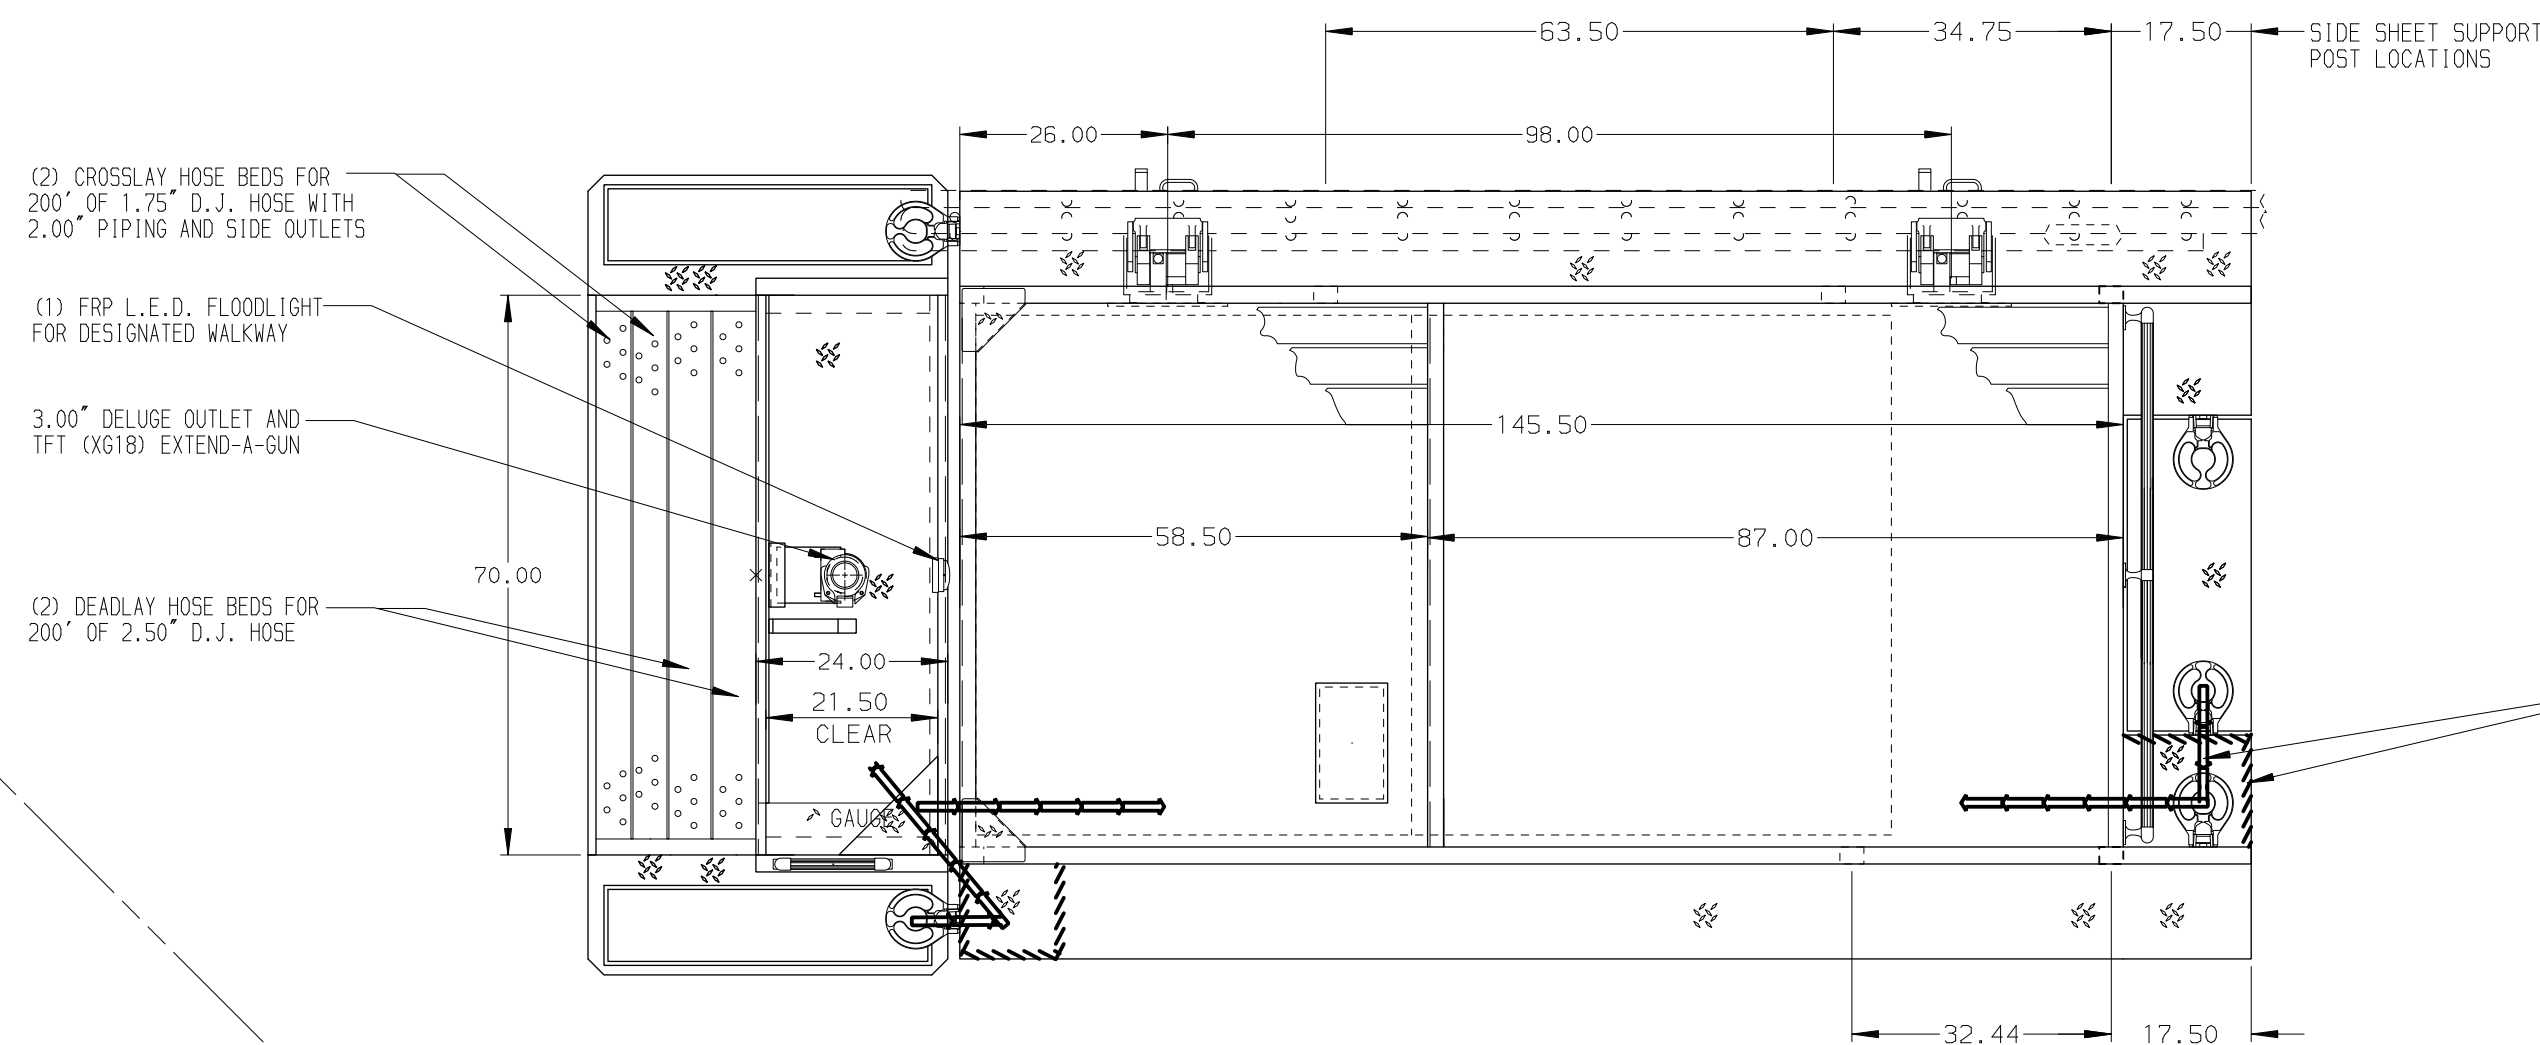


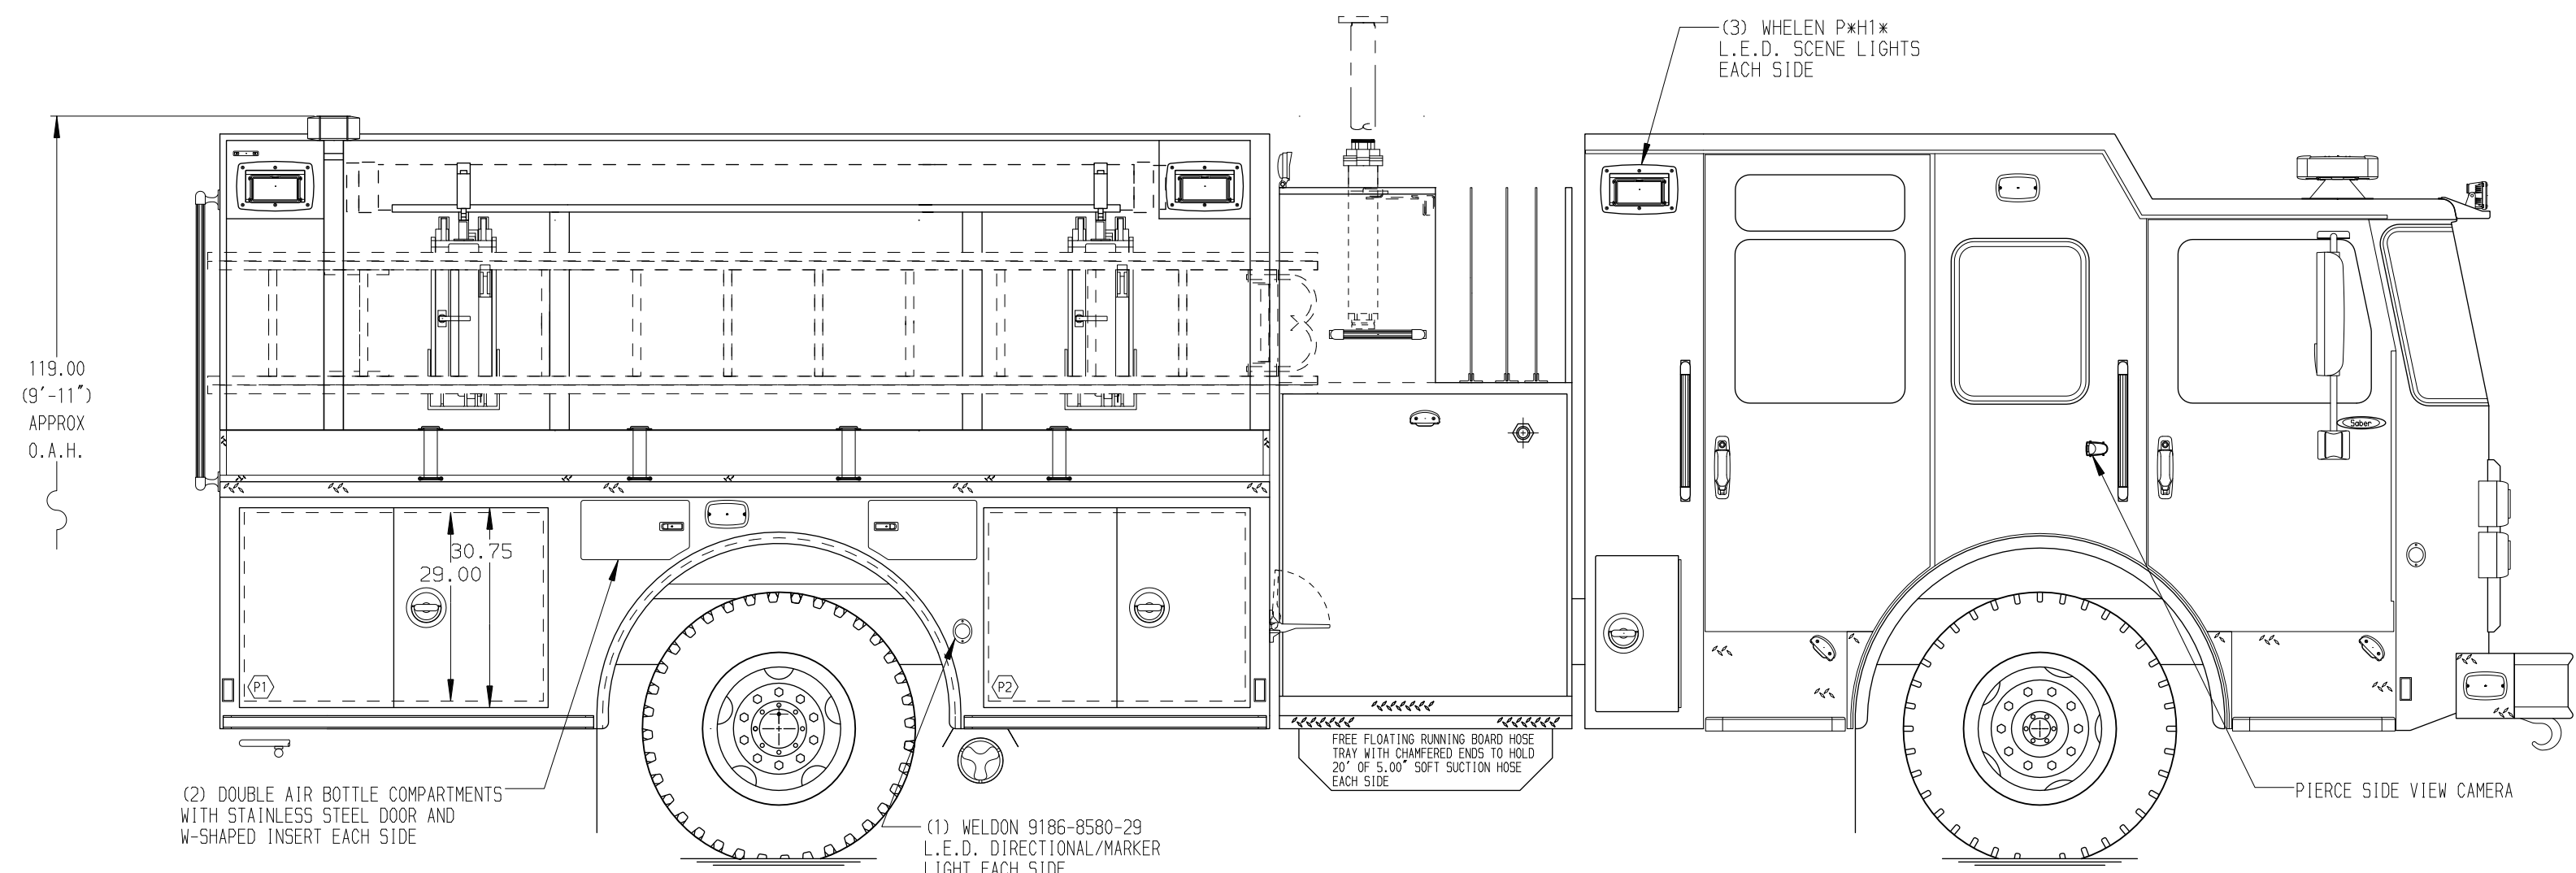

- HOSEBED CAPACITIES
- ① 600' OF 3.00" HOSE
 - ② 1500' OF 5.00" HOSE
 - ③ 250' OF 1.75" HOSE
 - ④ 250' OF 2.50" HOSE

SURFACE DESIGNATION AND PATHWAY MARKINGS

(3) 0.25" SINGLE SHEET HOSEBED DIVIDERS

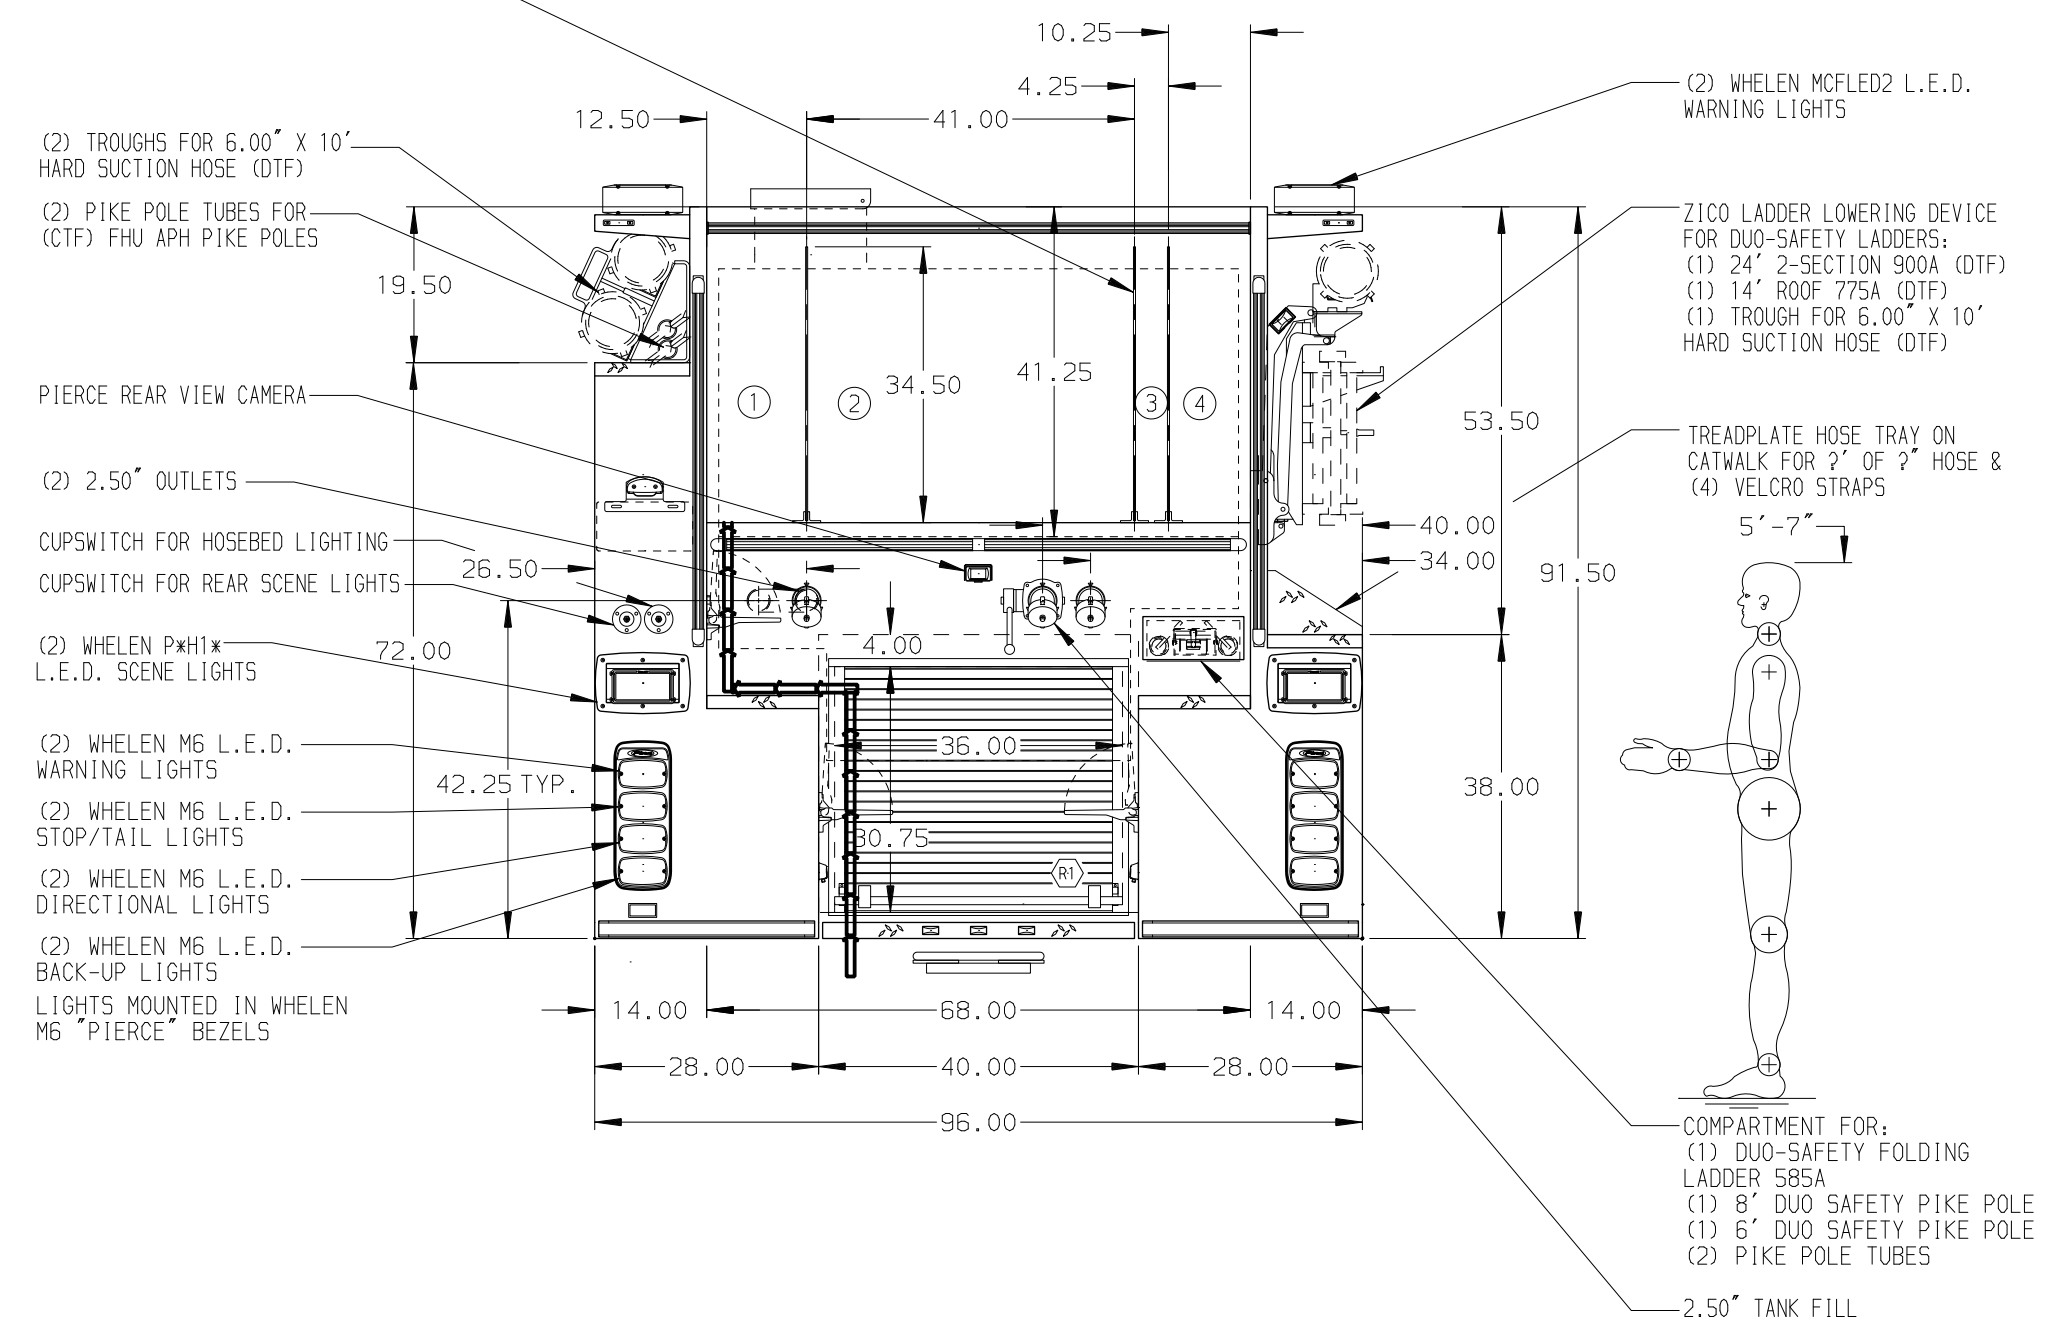

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED IN D3
- BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- FOUR SHELVES LOCATED IN COMPARTMENTS 2
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN D1, D3, R1, P1, AND P2
- SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN D2

CUSTOMER APPROVAL					 MANUFACTURING INC.		JOB NO.	32384
APPROVED BY: _____							SCALE	DATE
DATE: _____							1:24	
				CHASSIS DATA	TITLE	1750-D-1000 GAL POLY, 161" BODY, F.H. D.S., LOW P.S.	DRAWN BY	LST
				MAKE	FOR	ZICO LADDER RACK, (4) X-LAYS, DELUGE	CHECKED BY	NPA
				PIERCE		OLEY FIRE COMPANY		16MAY18
				MODEL		OLEY, PENNSYLVANIA		
	-	-	-		DWG NO.	32384AD	SHEET SIZE	D
REV	DATE	BY	CH	SABER FR				SHEET NO.
								1 OF 1

32384AD