


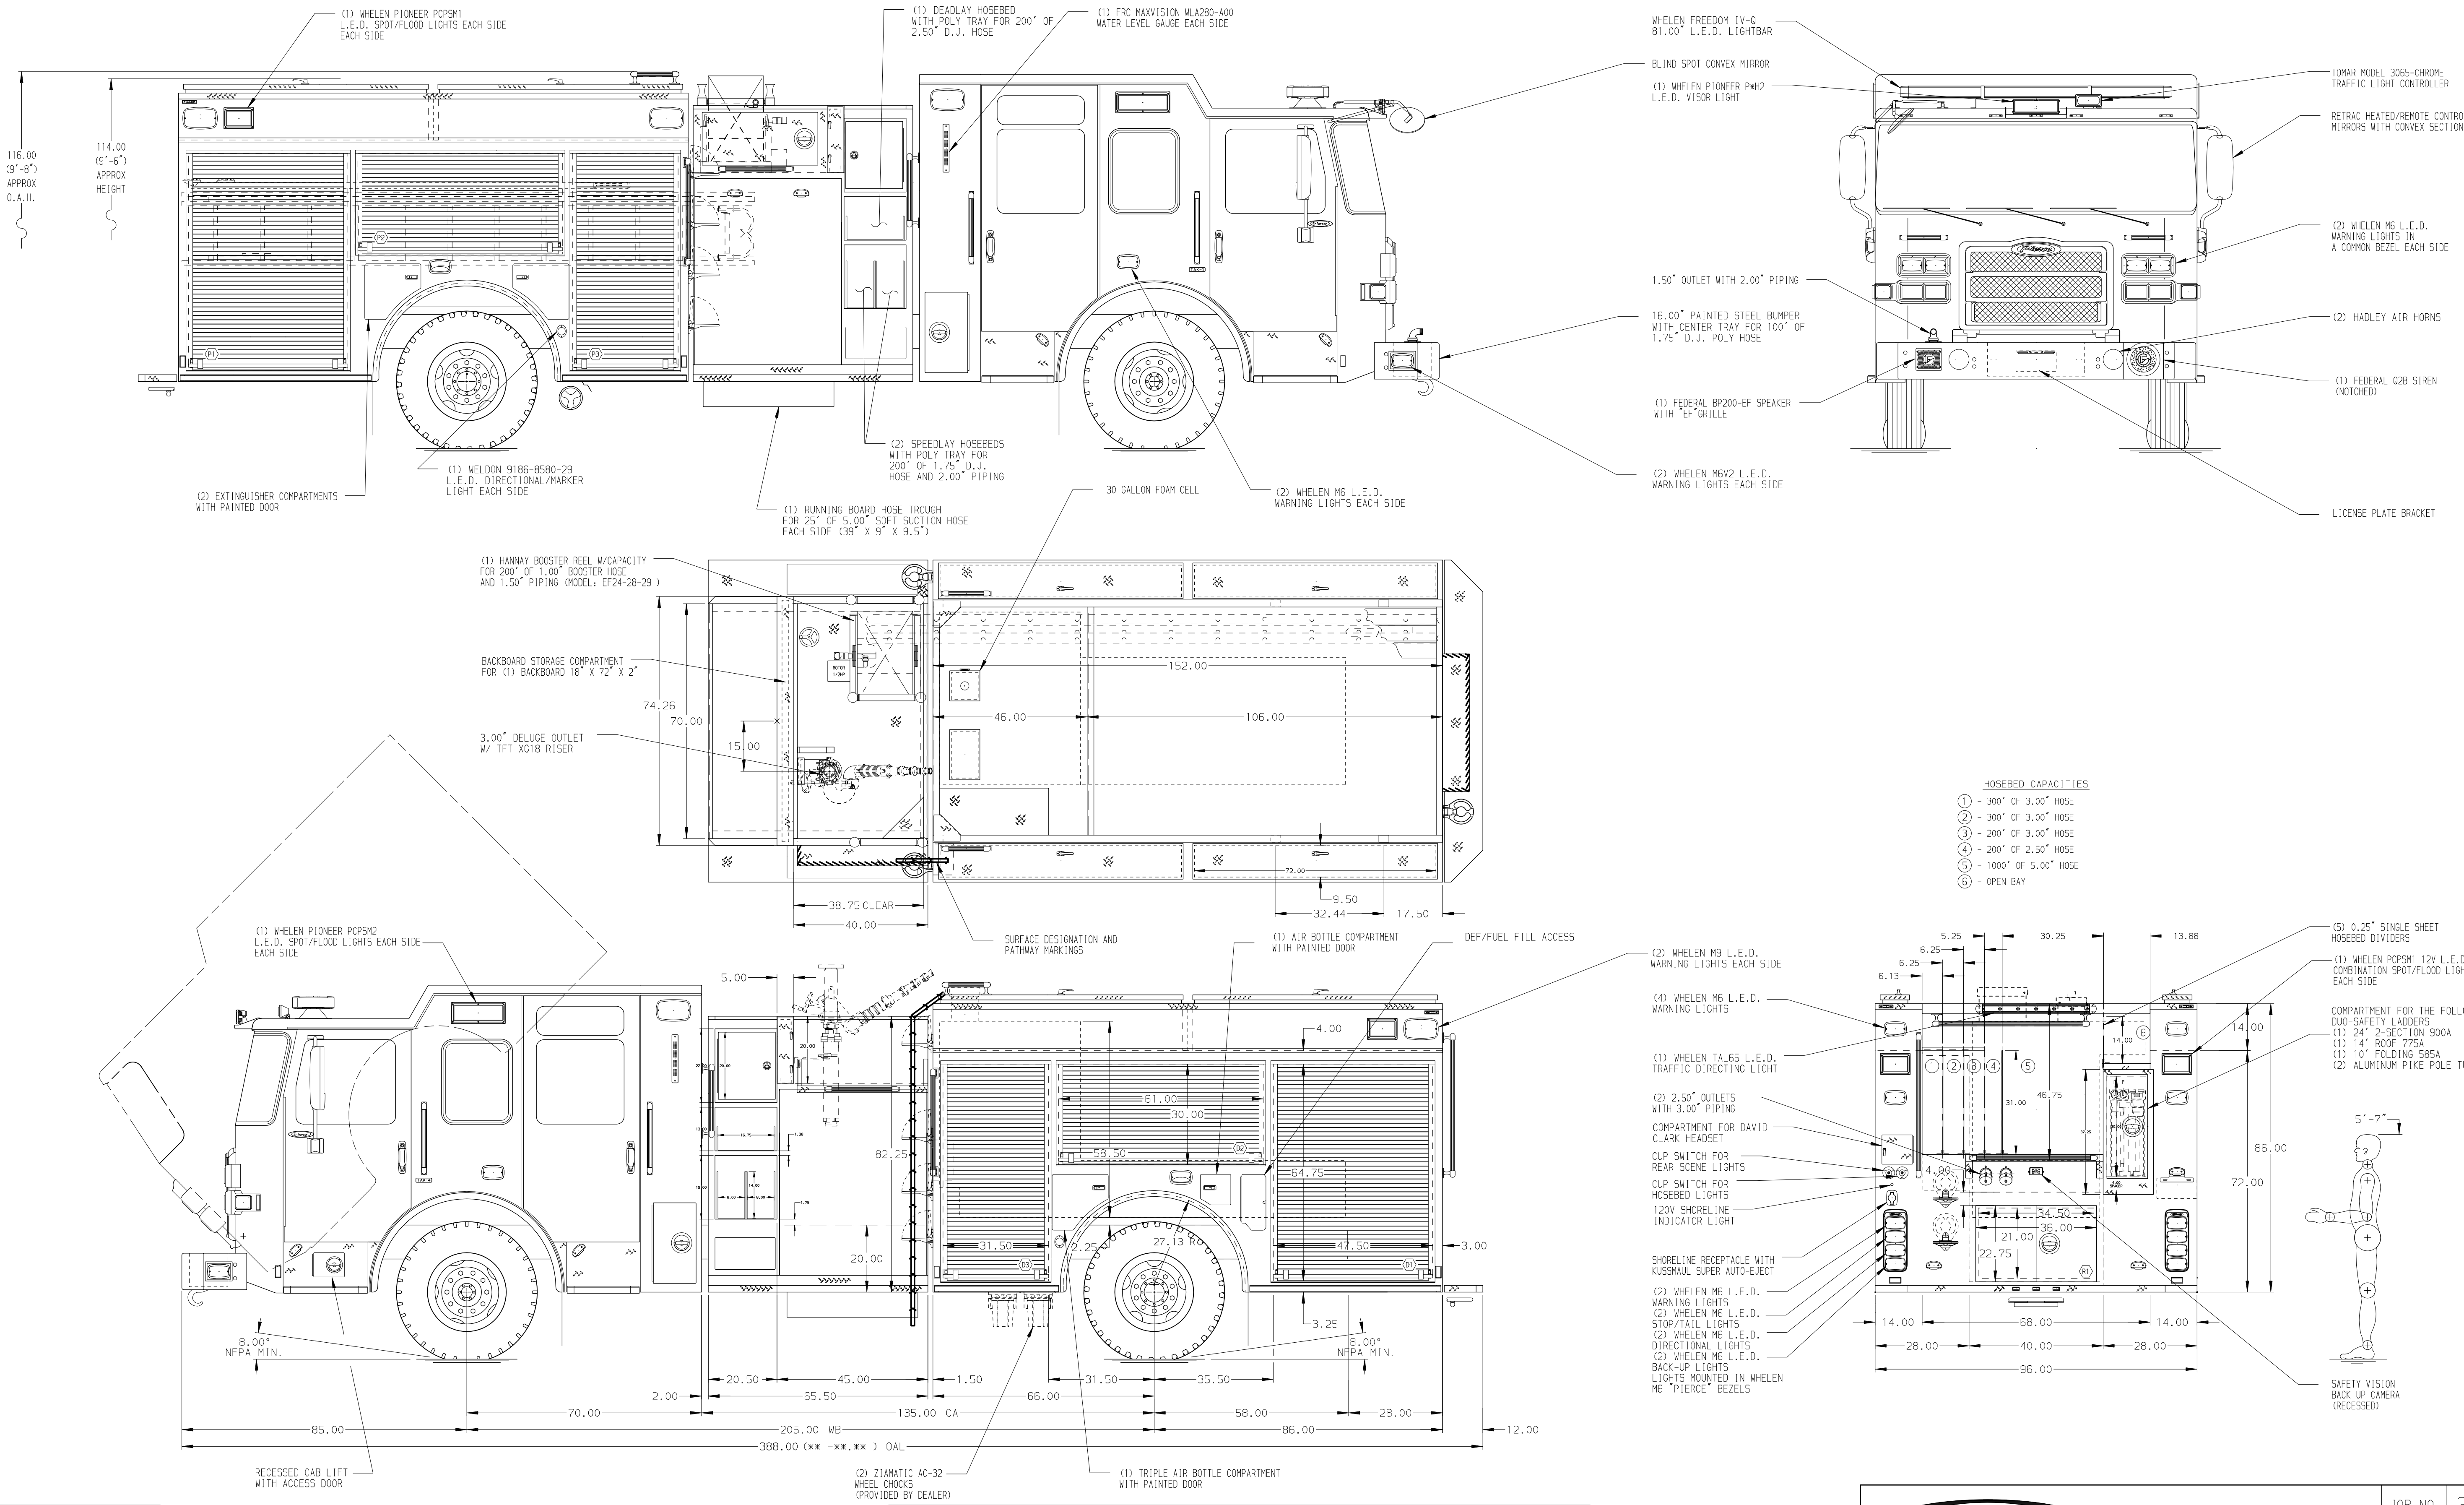

HOSEBED CAPACITIES

①	- 300' OF 3.00" HOSE
②	- 300' OF 3.00" HOSE
③	- 200' OF 3.00" HOSE
④	- 200' OF 2.50" HOSE
⑤	- 1000' OF 5.00" HOSE
⑥	- OPEN BAY

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. WHEEL CHOCKS AND MOUNTING BRACKETS PROVIDED BY DEALER
- 2. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
- 3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
- 4. AIR INLET/OUTLET WITH DISCONNECTING FITTING ON DS PUMP PANEL
- 5. MIC & SPEAKER COMPARTMENT ON OPERATORS PANEL

REV	DATE	BY	CH	ENFORCER
05DEC18	05DEC18	AMI	SMA	DATA
19OCT18	19OCT18	AMI	SHA	MAKE
06OCT18	06OCT18	AMI	SHA	PIERCE
20SEP18	20SEP18	AMI	SHA	MODEL

Pierce MANUFACTURING INC.		JOB NO.	32594
		SCALE	1:24
		DATE	
		DRAWN BY	AMI
		21MAY18	
		CHECKED BY	SMA
		21MAY18	
		SHEET SIZE	D
		SHEET NO.	1 OF 2

TITLE 1500-D-500P W/30 GAL FOAM CELL, 152" BODY
(2)SPEEDLAYS, (1)DEADLAY, LADDERS BTWN TANK & S.SHT
FOR AUSTIN FIRE DEPARTMENT
AUSTIN, TEXAS
DWG NO. 32594AD-SH1