

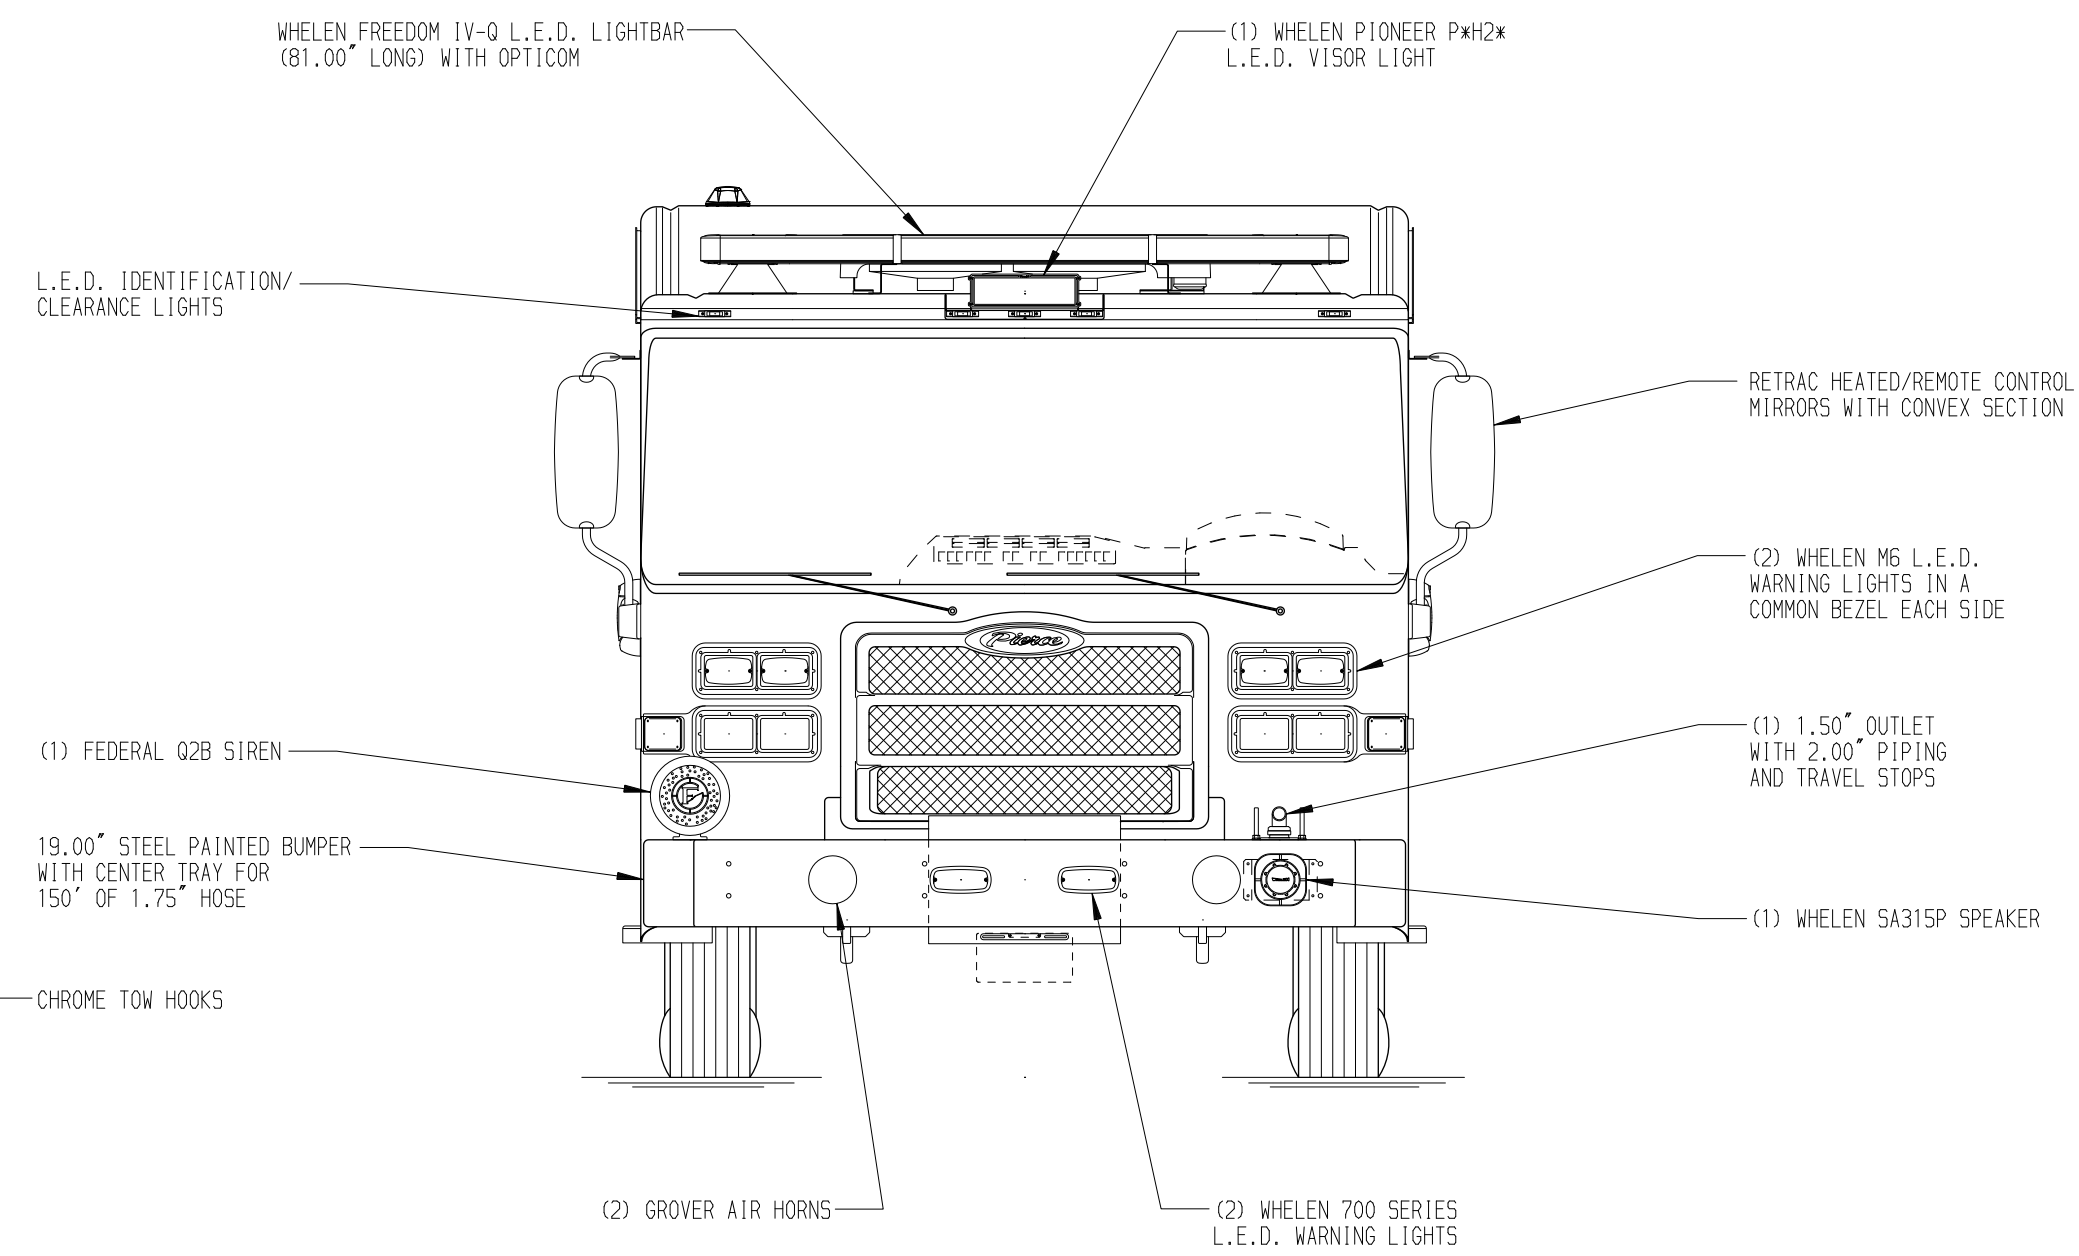
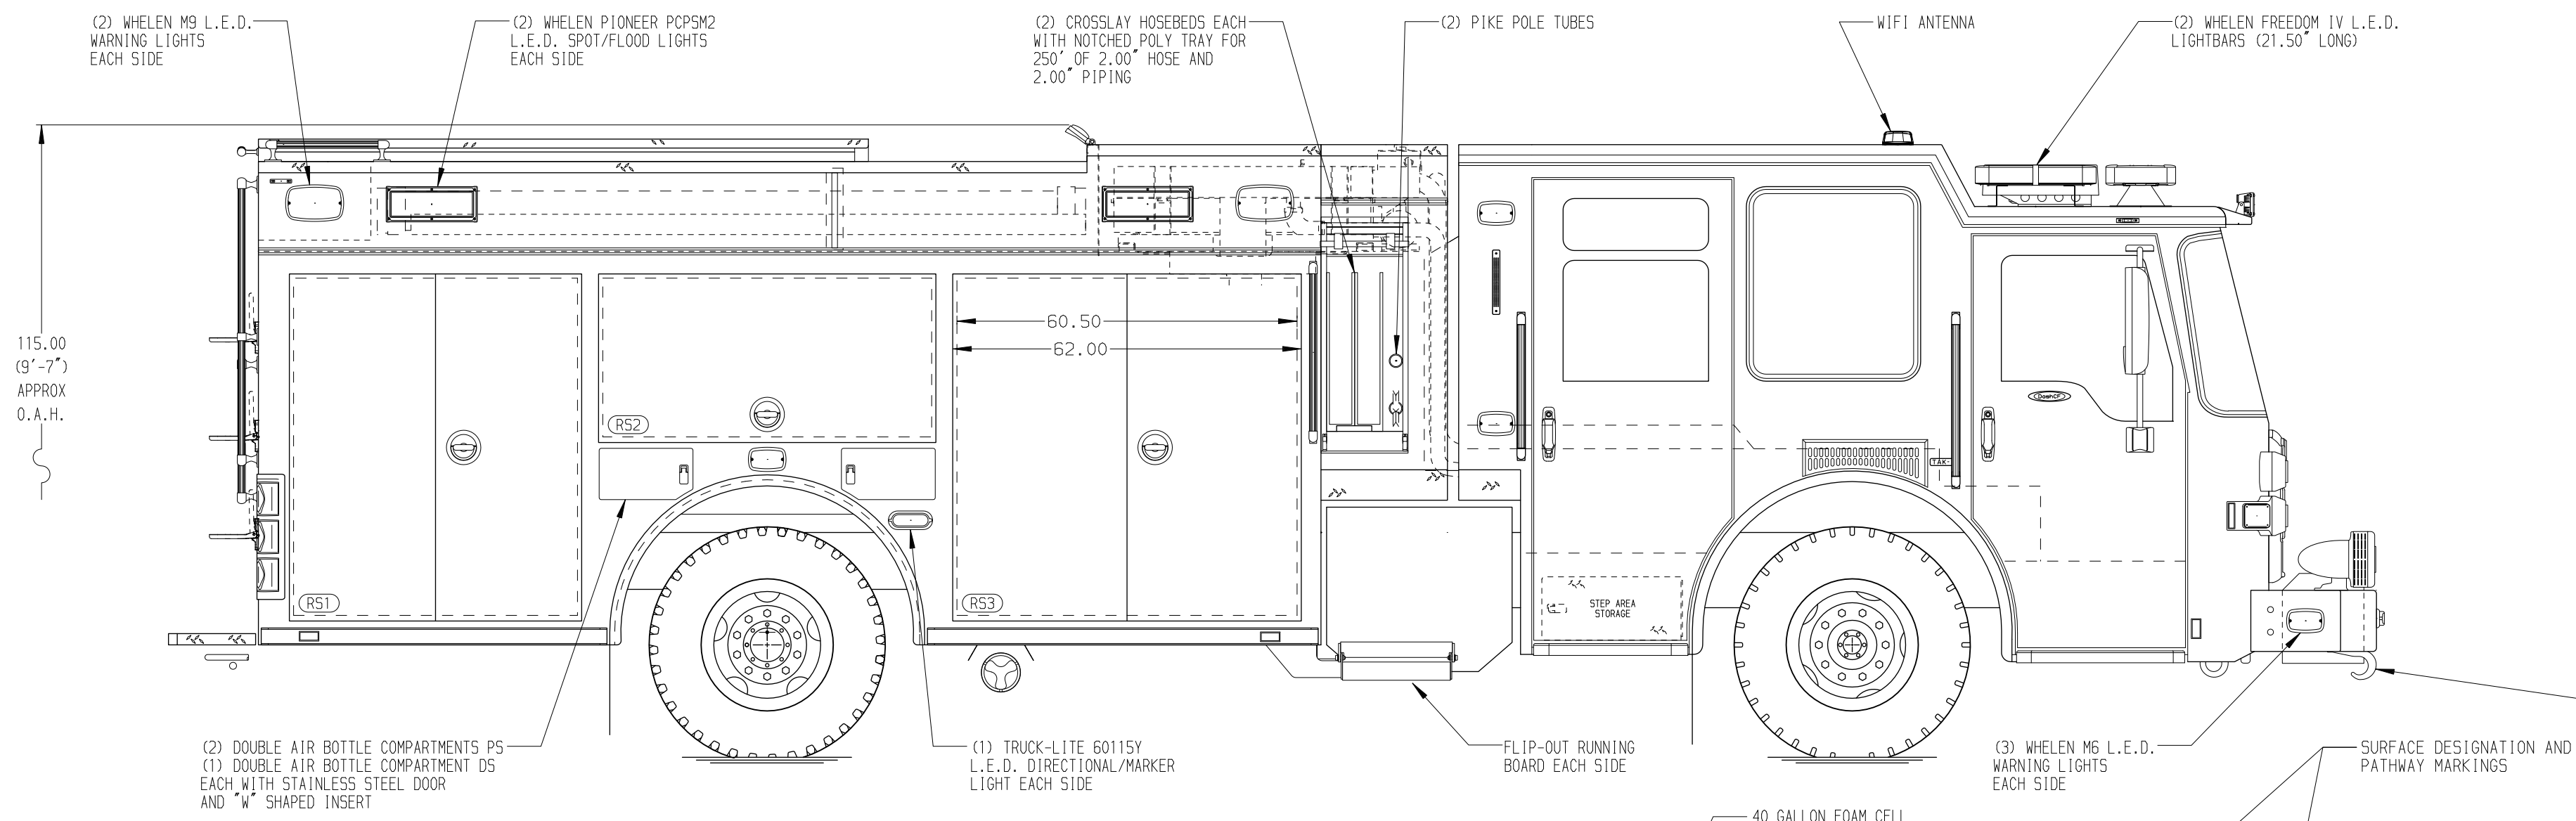


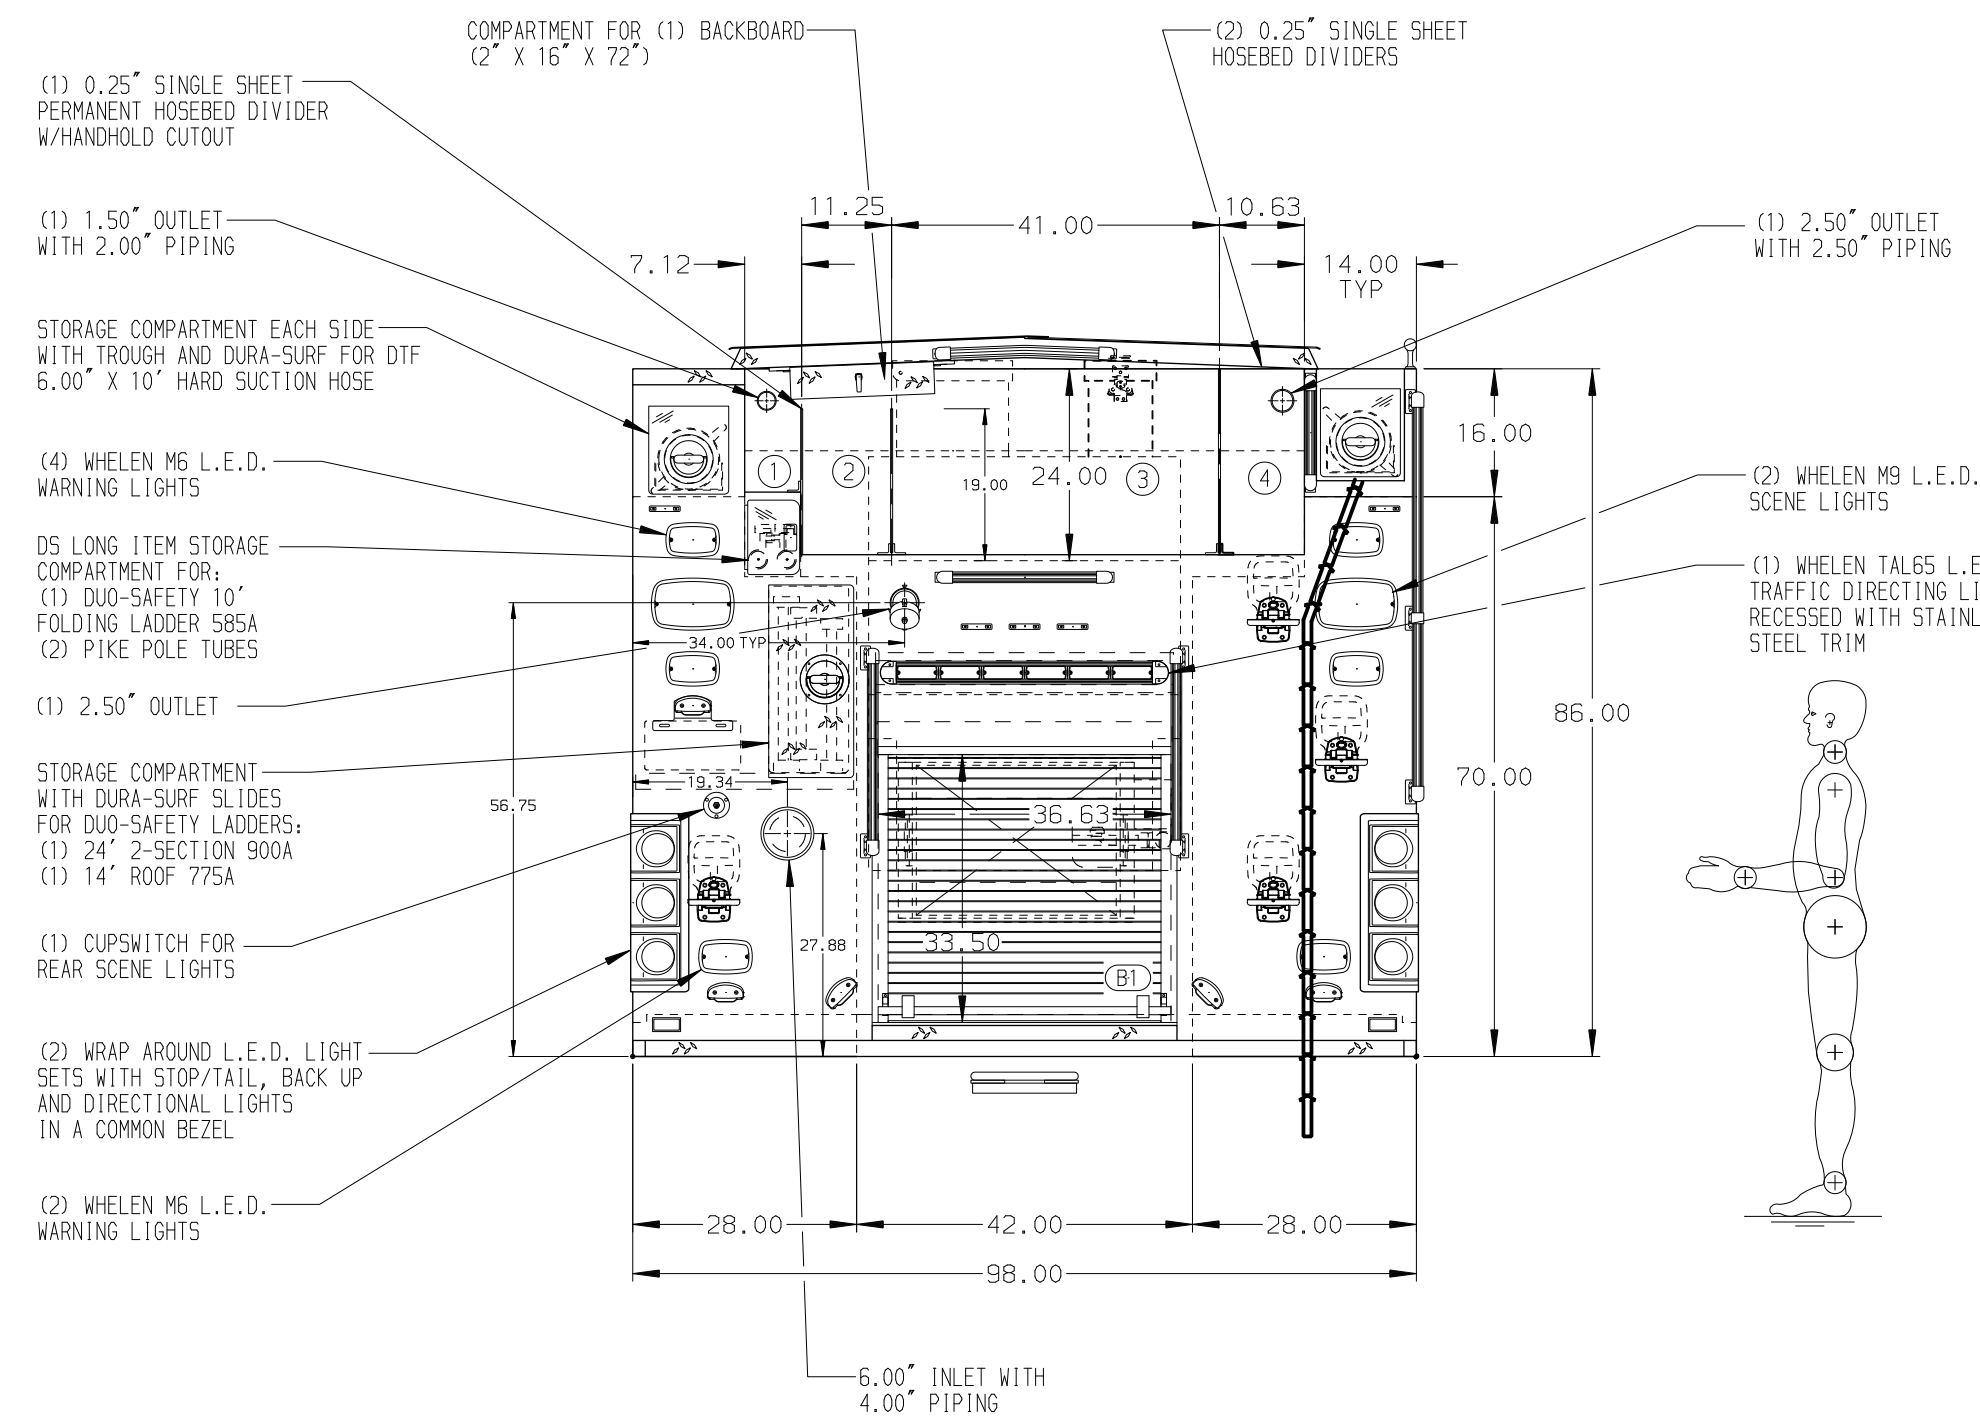

- HOSEBED CAPACITIES
- 250' OF 2.00" D.J. POLY HOSE
 - 500' OF 3.00" D.J. POLY HOSE
 - 1200' OF 5.00" D.J. POLY HOSE
 - 275' OF 2.50" D.J. POLY HOSE

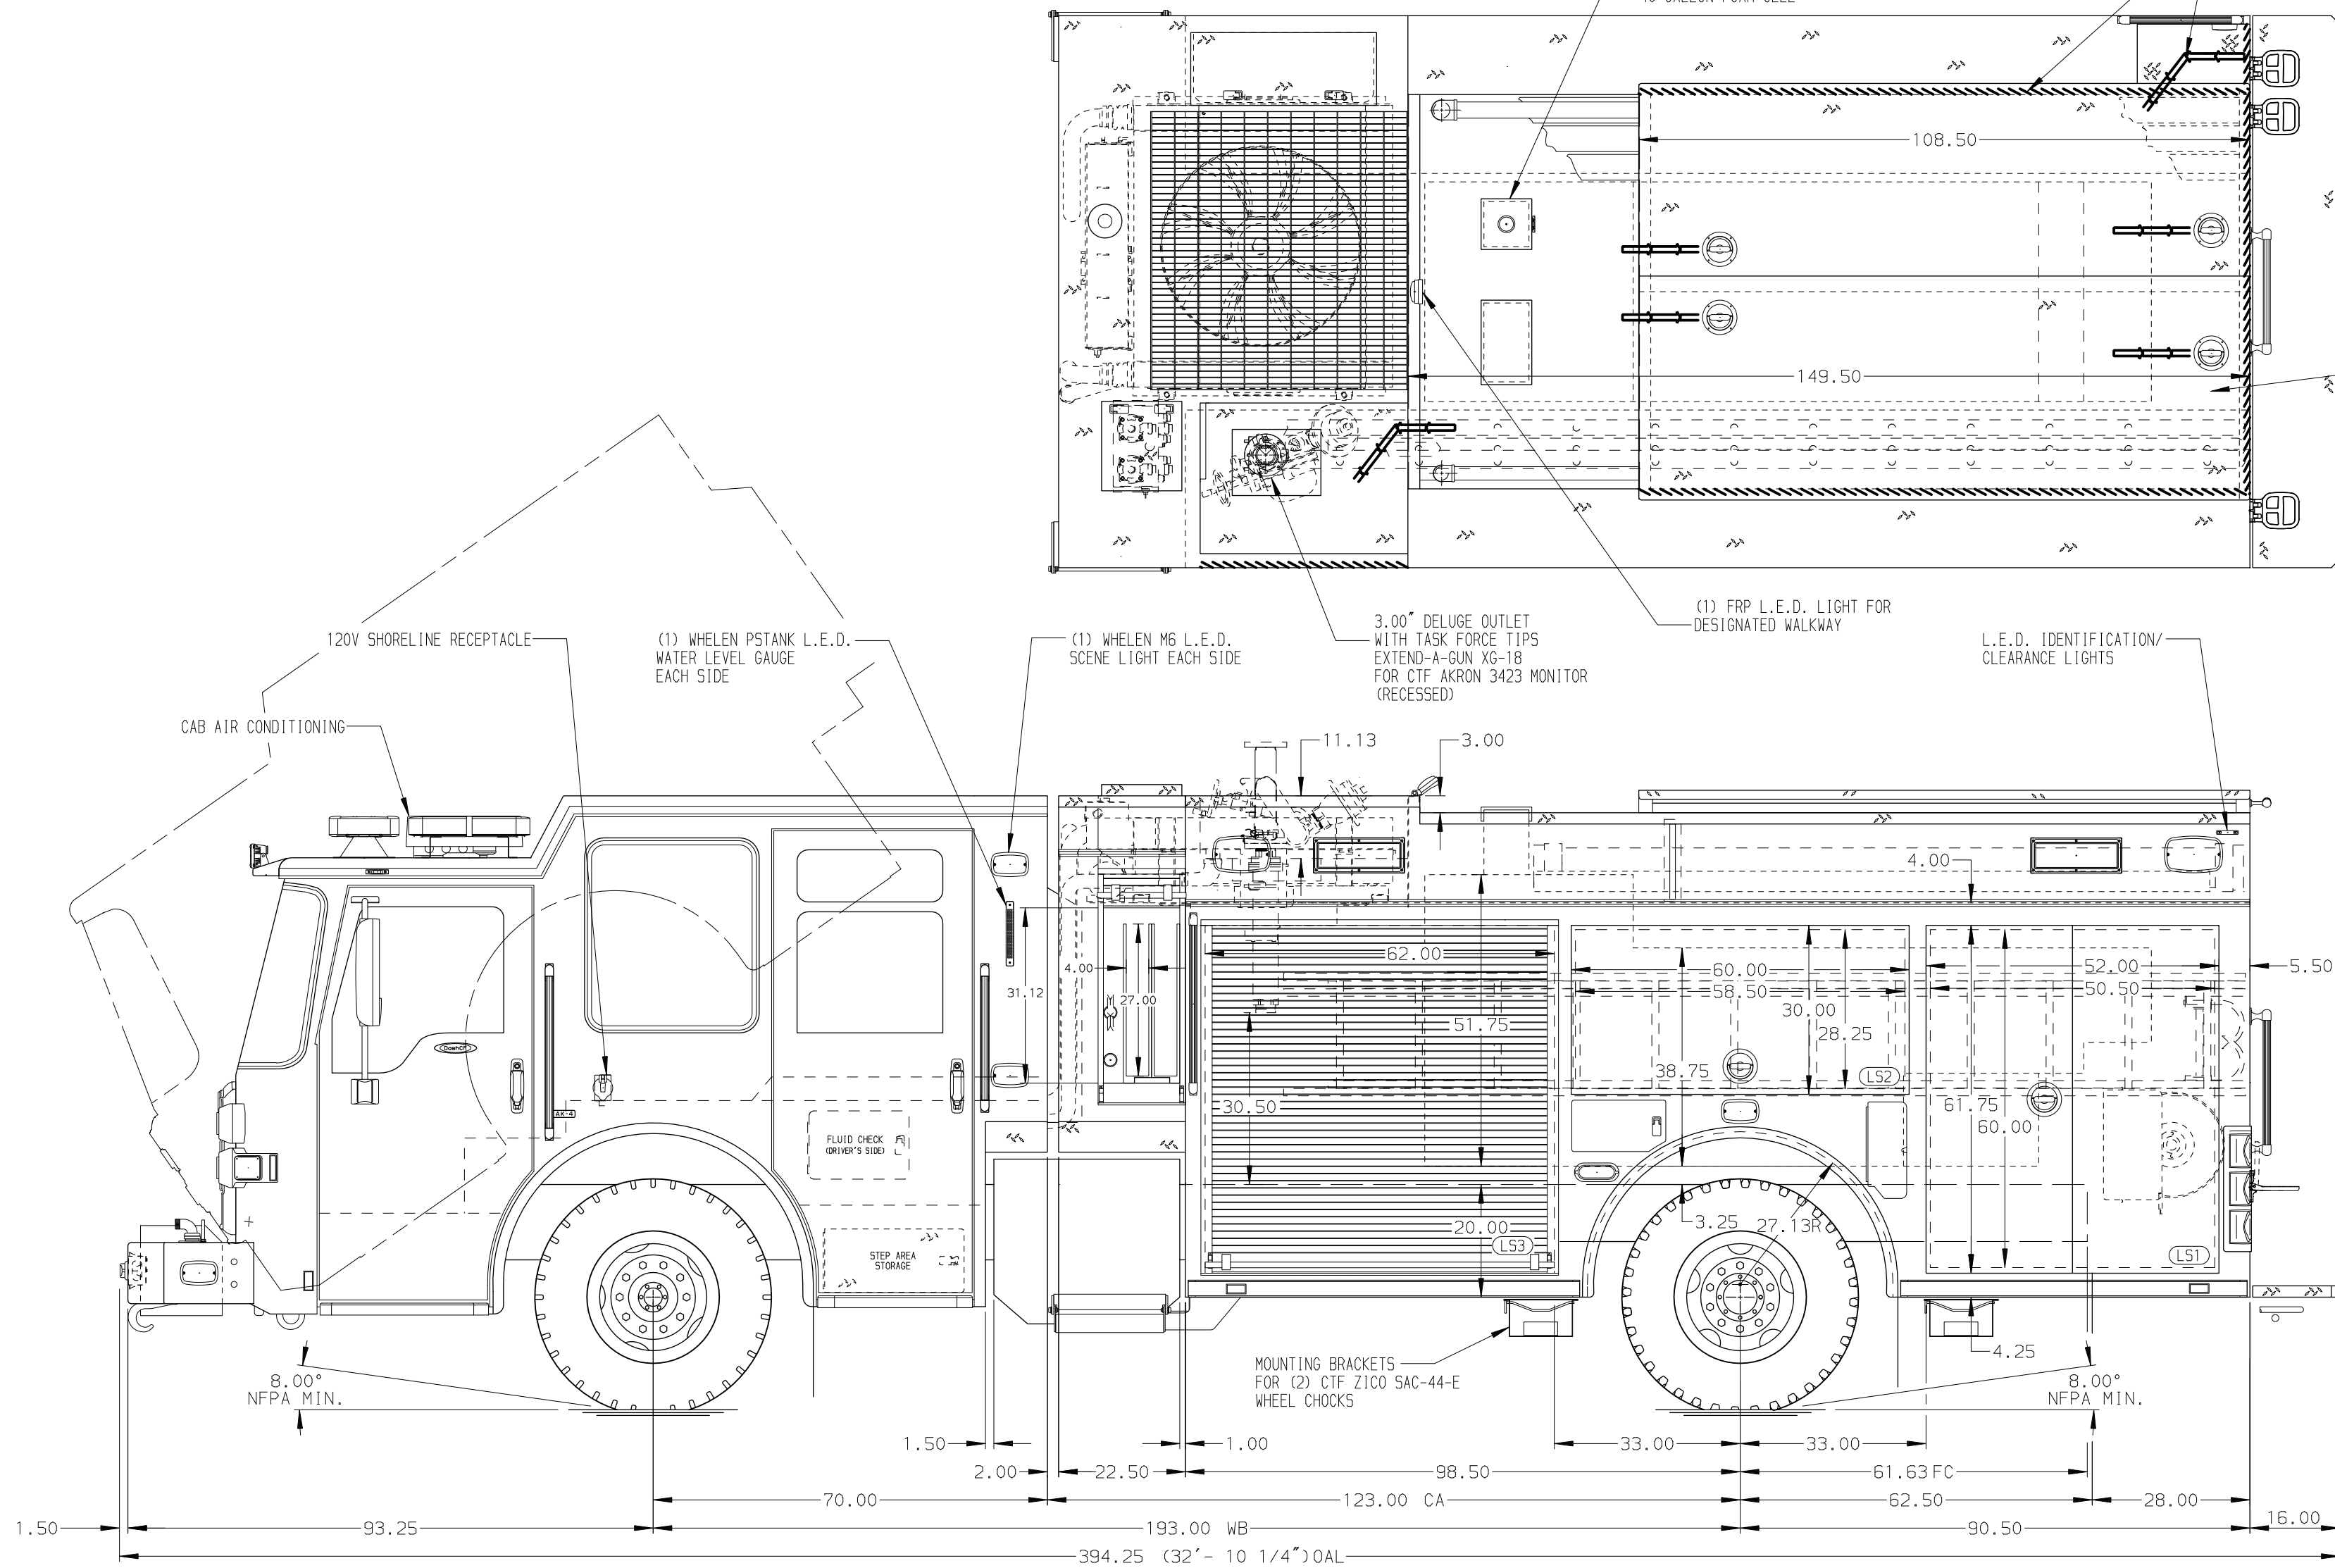

ALUMINUM BODY

MAXIMUM O.A.H. 116.00"

SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- RUD AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- BATTERY CHARGER LOCATED UNDER THE CENTER CONSOLE AREA
- BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SIDE SEAT RISER WITH BRACKET
- ALL FOLDING STEPS TO BE TRIDENT WITH INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
- PULL STRAP ON DOOR IN COMPARTMENTS LS2, RS2 AND BOTH CROSSLAY DOORS
- ONE VERTICAL PARTITION IN RS3
- TWO TILTING SLIDE-OUT TRAYS - ONE IN RS1 & RS2
- FIVE ADJUSTABLE FULL WIDTH/FULL DEPTH SHELVES - ONE IN LS1 & LS3 AND THREE IN RS3
- TWO FLOOR MOUNTED SLIDE-OUT TRAYS - ONE IN RS1 & RS3
- TWO ADJUSTABLE SLIDE-OUT TRAYS - ONE RS1 & RS3

- ONE VERTICAL BOLT-IN PARTITION BETWEEN LS1-B1 & RS1-B1
- AIR OUTLET W/ SHUT OFF VALVE LOCATED ON DS PUMP PANEL
- ONE 120V 6-PLACE RECEPTACLE STRIP IN RS1
- AMDOR LUMABAR 12V L.E.D. LIGHT STRIPS MOUNTED UNDER THE HOSE BED COVER
- ONE HANNAY BOOSTER REEL MODEL SBEP32-19-21 WITH A 1/3 HP MOTOR AND 150' OF 0.75" BOOSTER HOSE LOCATED IN COMPARTMENT B1 WITH A SLIDE OUT ROLLER GUIDE ASSEMBLY
- HUSKY 12 FOAM SYSTEM

REV	DATE	BY	CH	DASH CF
1	16APR19	JWO	SHA	CHASSIS DATA
2	15MAR19	JWO	SHA	MAKE
3	22MAR19	JWO	SHA	PIERCE
4	27DEC18	KLE	KWI	MODEL

TITLE 1500-D-660 WATER/40 FOAM, 189" RESCUE, CROSSLAYS DELUGE, BOOSTER REEL, LADDERS THRU BODY FOR CHESTERFIELD COUNTY FIRE DEPARTMENT CHESTERFIELD, VIRGINIA DWG NO. 33251 AD	 MANUFACTURING INC.		JOB NO. 33251 01-03
	SCALE 1:24		DATE
	DRAWN BY JWO		02NOV18
	CHECKED BY SMA		07NOV18
SHEET SIZE D		SHEET NO. 1 OF 1	