

PUMPER

BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

24,000 Lb Meritor Axle

ENGINE

510 HP Paccar MX13 Engine

TRANSMISSION

Allison 6th Gen, 4000 EVS P

BUMPER

22" Extended Painted Steel

CAB

7000 Enforcer Cab

BODY

WATER TANK

750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

152" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" Lap Full Height & Depth Front & Rear

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 Darley PSM

CROSSLAYS, 1.50"

1.50" Crosslays Not Required

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

(2) 1.50" W/Troy Std. Capacity

GENERATOR

Generator Not Required

Foam System

No Foam System Required

Foam Cell





No Foam Cell

Side Roll and Frontal Impact Protection


NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP OF LEFT SIDE BUMPER
2. TWO SHORELINE RECEPTACLES WITH KUSSMAIL SUPER AUTO-EJECT AND SEPERATE INDICATOR LIGHT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET/OUTLET WITH DISCONNECT COUPLING ON DRIVER'S SIDE PUMP PANEL
4. BATTERY CHARGER LOCATED PER ORDER
5. EIGHT ADJUSTABLE SHELVES LOCATED PER ORDER
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY W/ SIDE SLIDES LOCATED PER ORDER
7. ONE DRIP PAN GUARD FOR ROLL DOOR LOCATED PER ORDER
8. ONE THREE DRAWER CTECH DRAWER ASSEMBLY LOCATED PER ORDER
9. ONE VERTICAL PARTITION LOCATED PER ORDER
10. PARTITION BETWEEN L51/B1 AND RS1/B1

11. TWO 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER
12. BATTERY CHARGER INDICATOR LOCATED ON THE DRIVER'S SIDE OF CAB
13. WHEEL CHOCKS AND MOUNTING (CTF)
14. THREE ALUMINUM TOOLBOARDS LOCATED ON THE BACKWALL PER SHOP ORDER

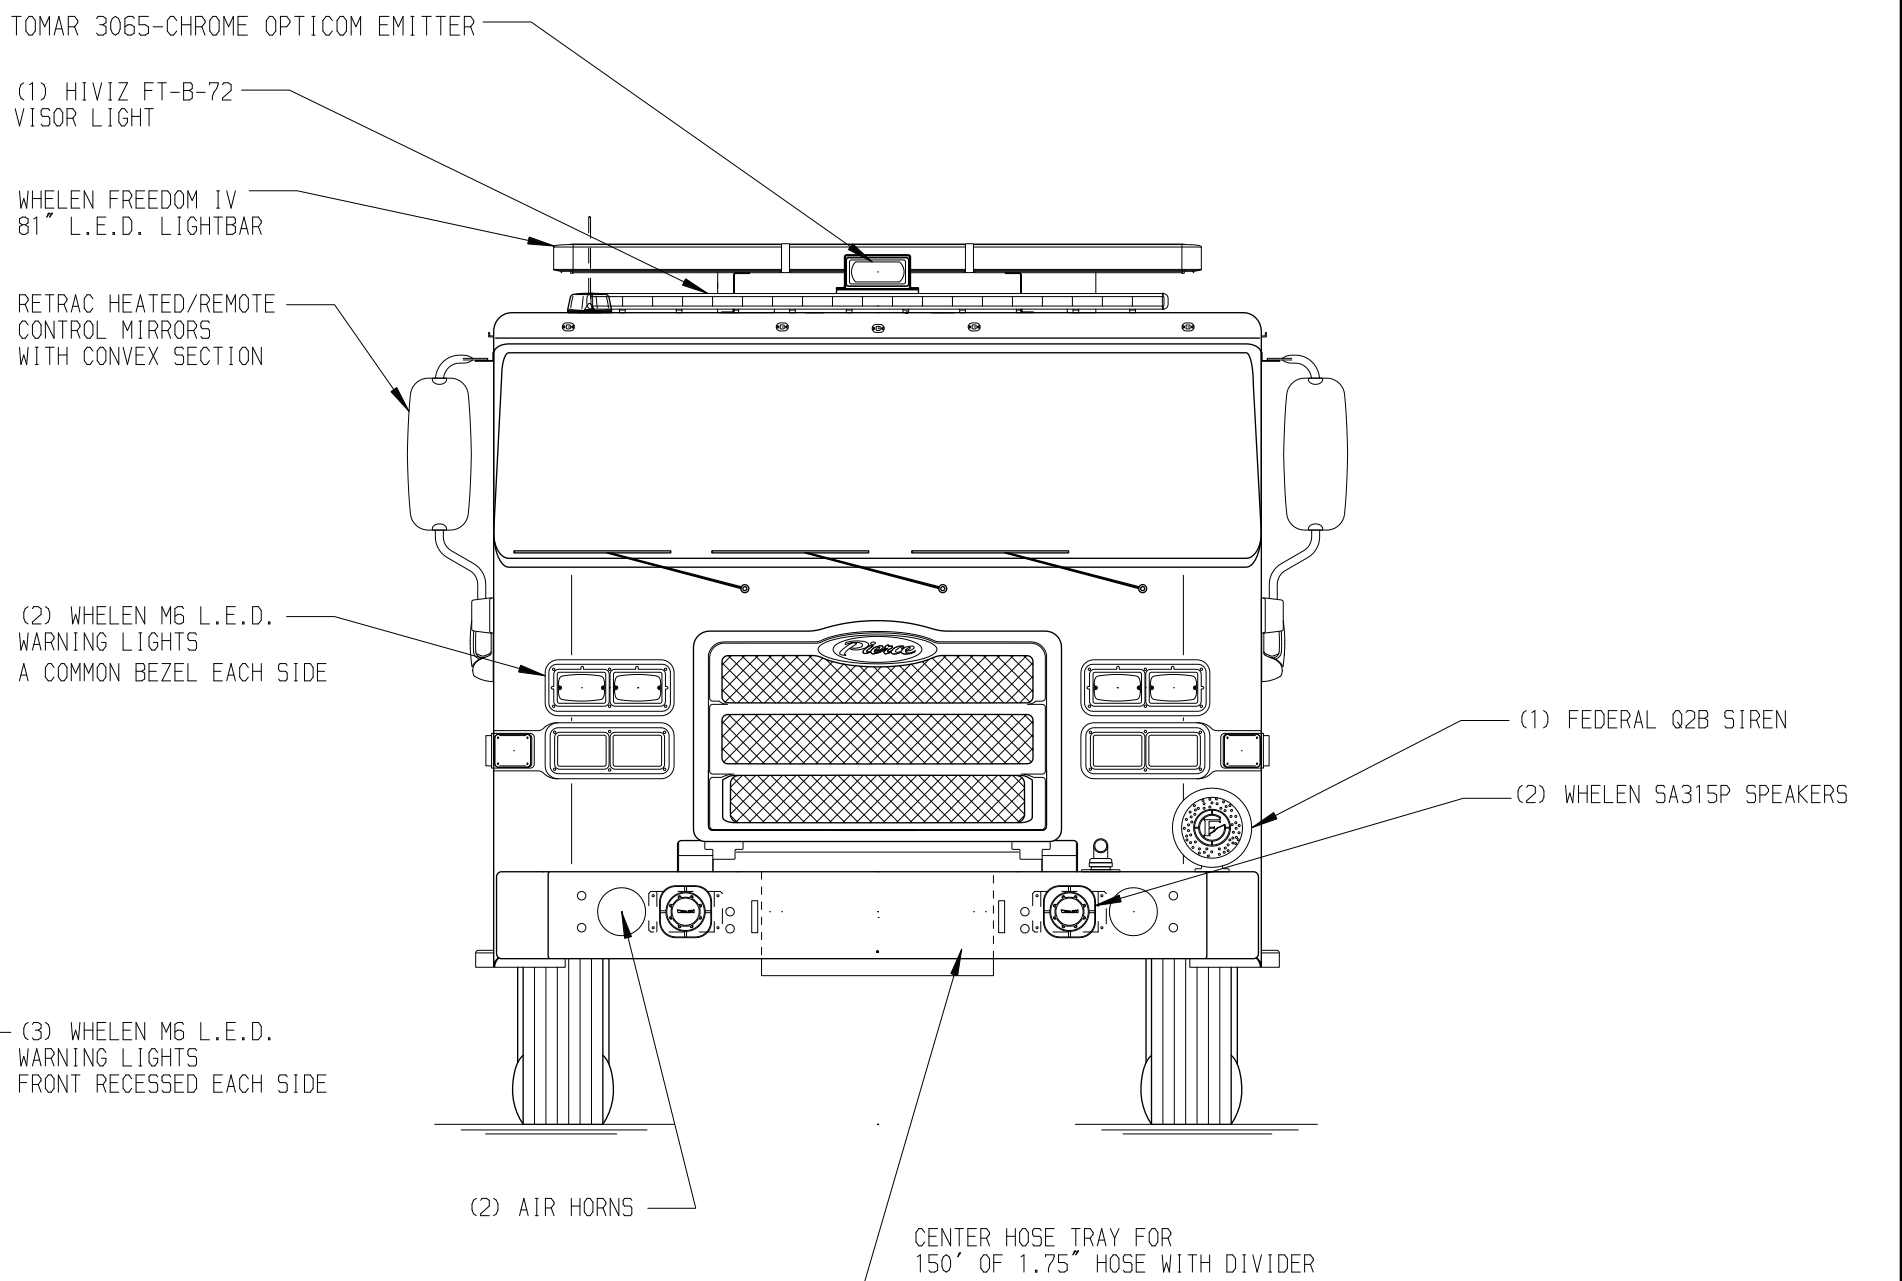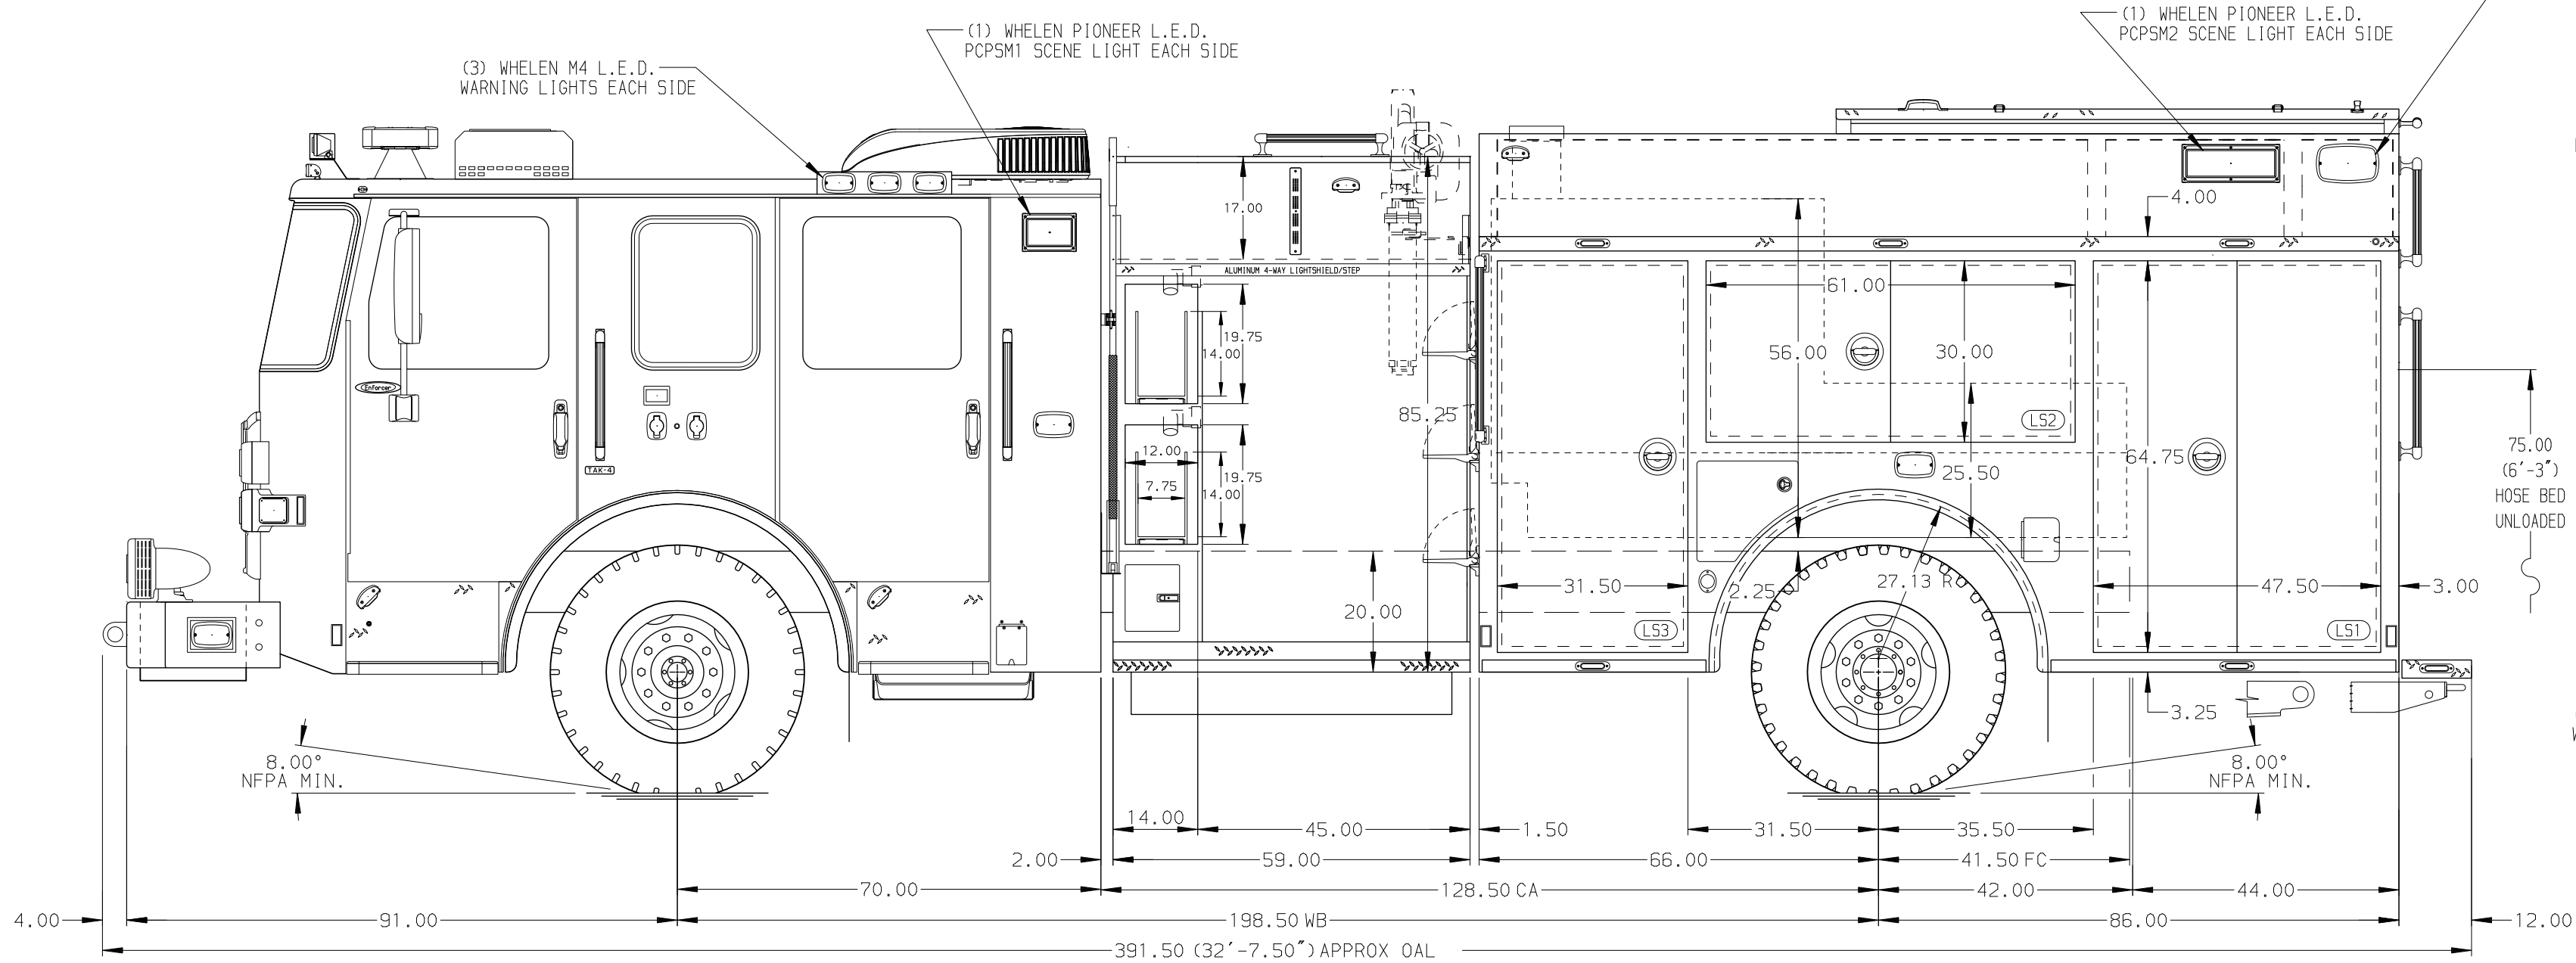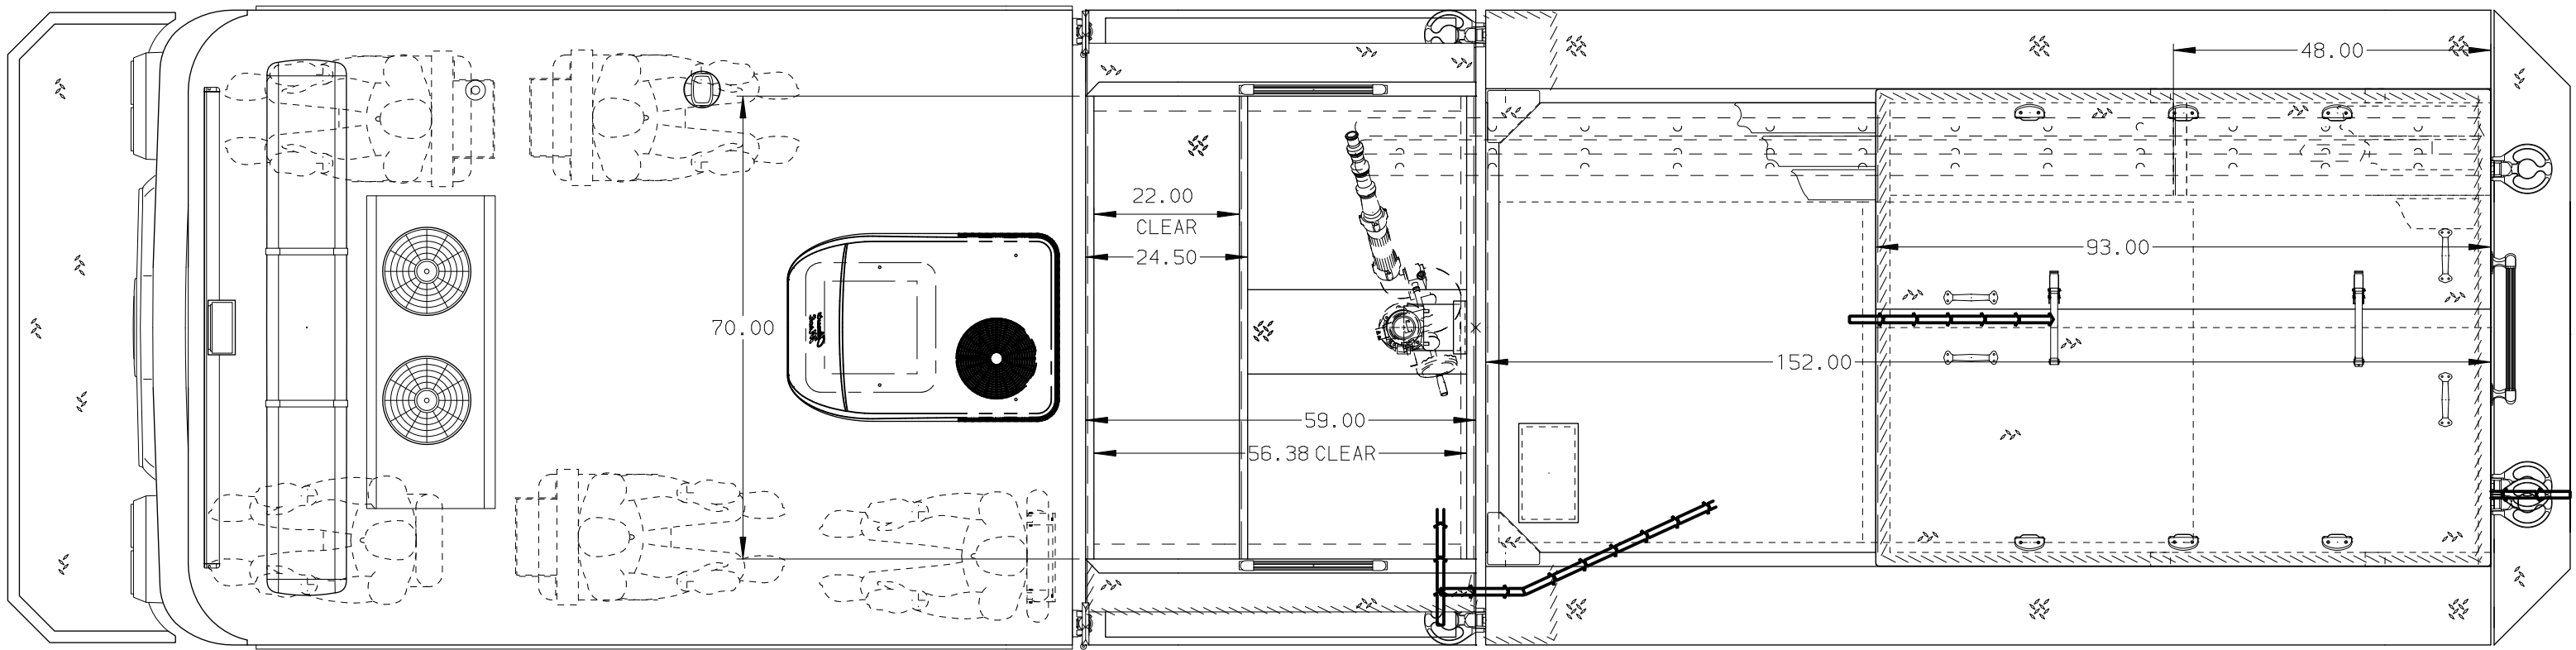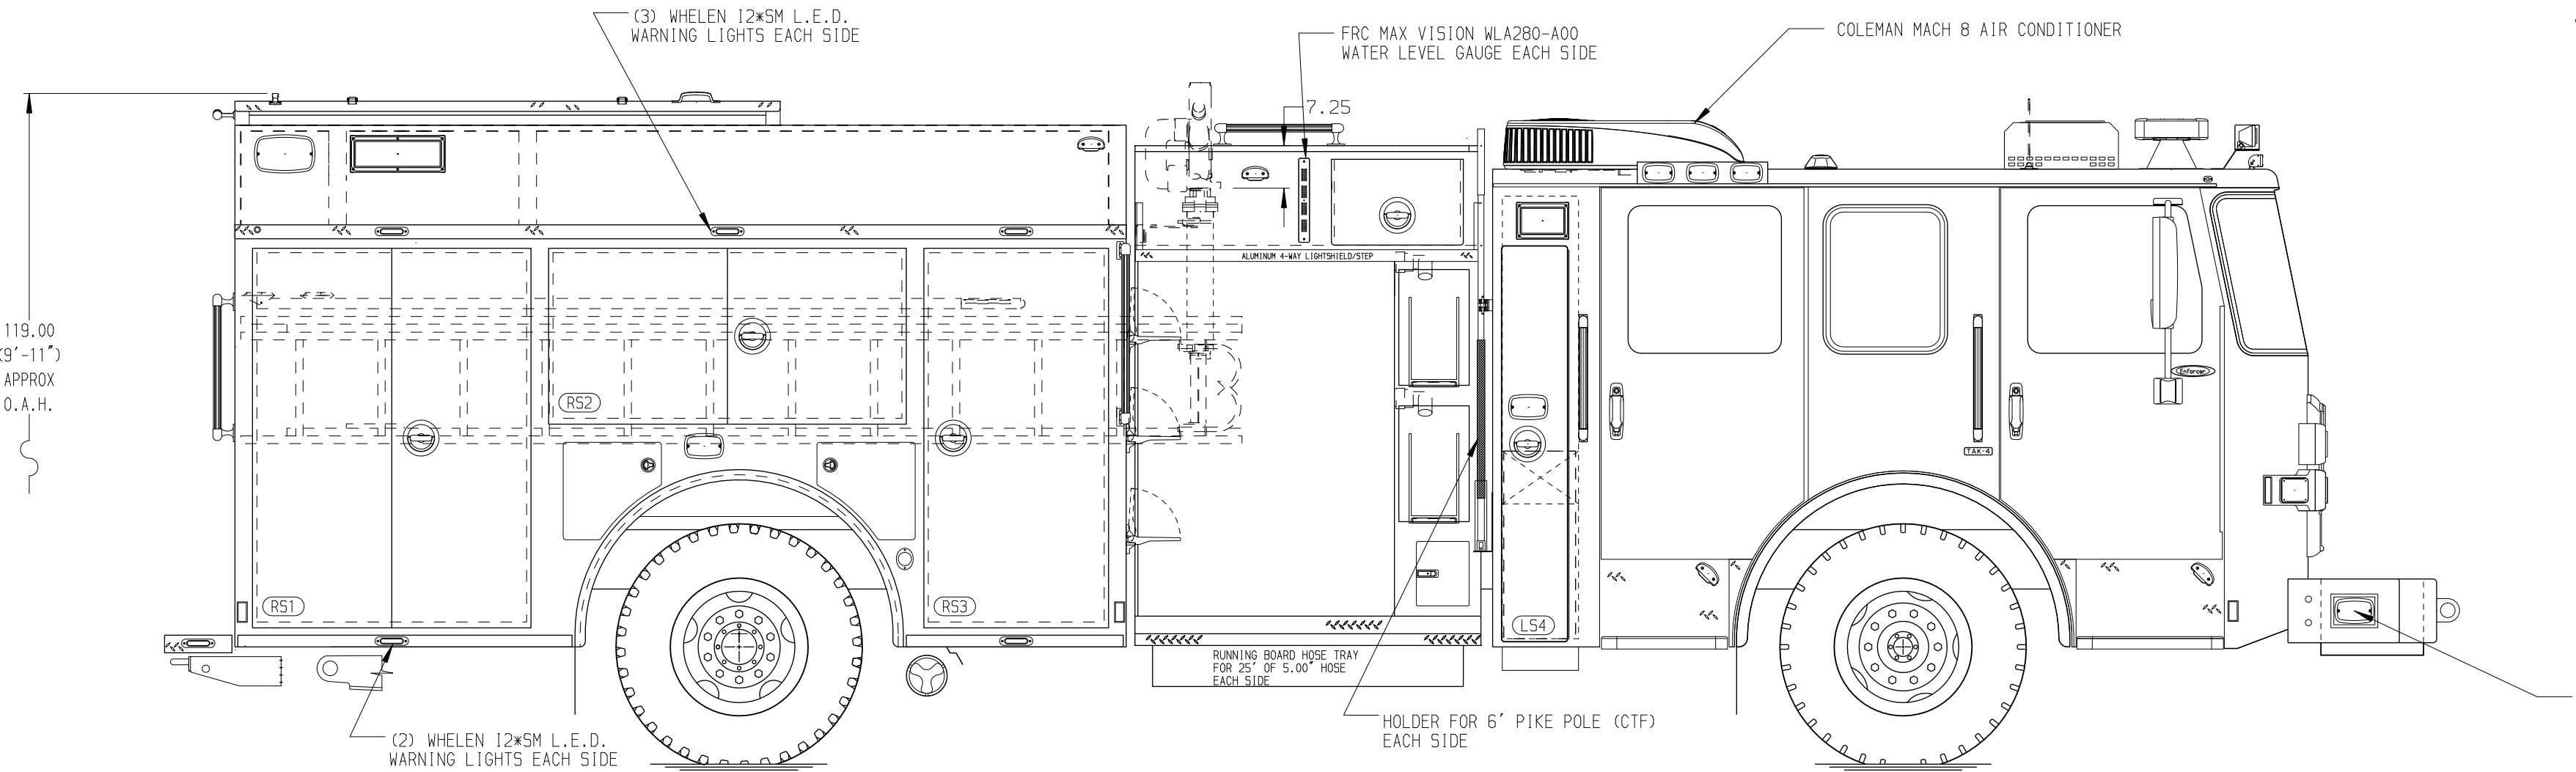

HOSEBED CAPACITY	
BED 1	400' OF 2.50" D.J. POLY HOSE WITH 100' OF 1.75" ON TOP
BED 2	500' OF 5.00" D.J. POLY HOSE
BED 3	500' OF 5.00" D.J. POLY HOSE
BED 4	400' OF 2.50" D.J. POLY HOSE
BED 5	200' OF 2.50" D.J. POLY HOSE

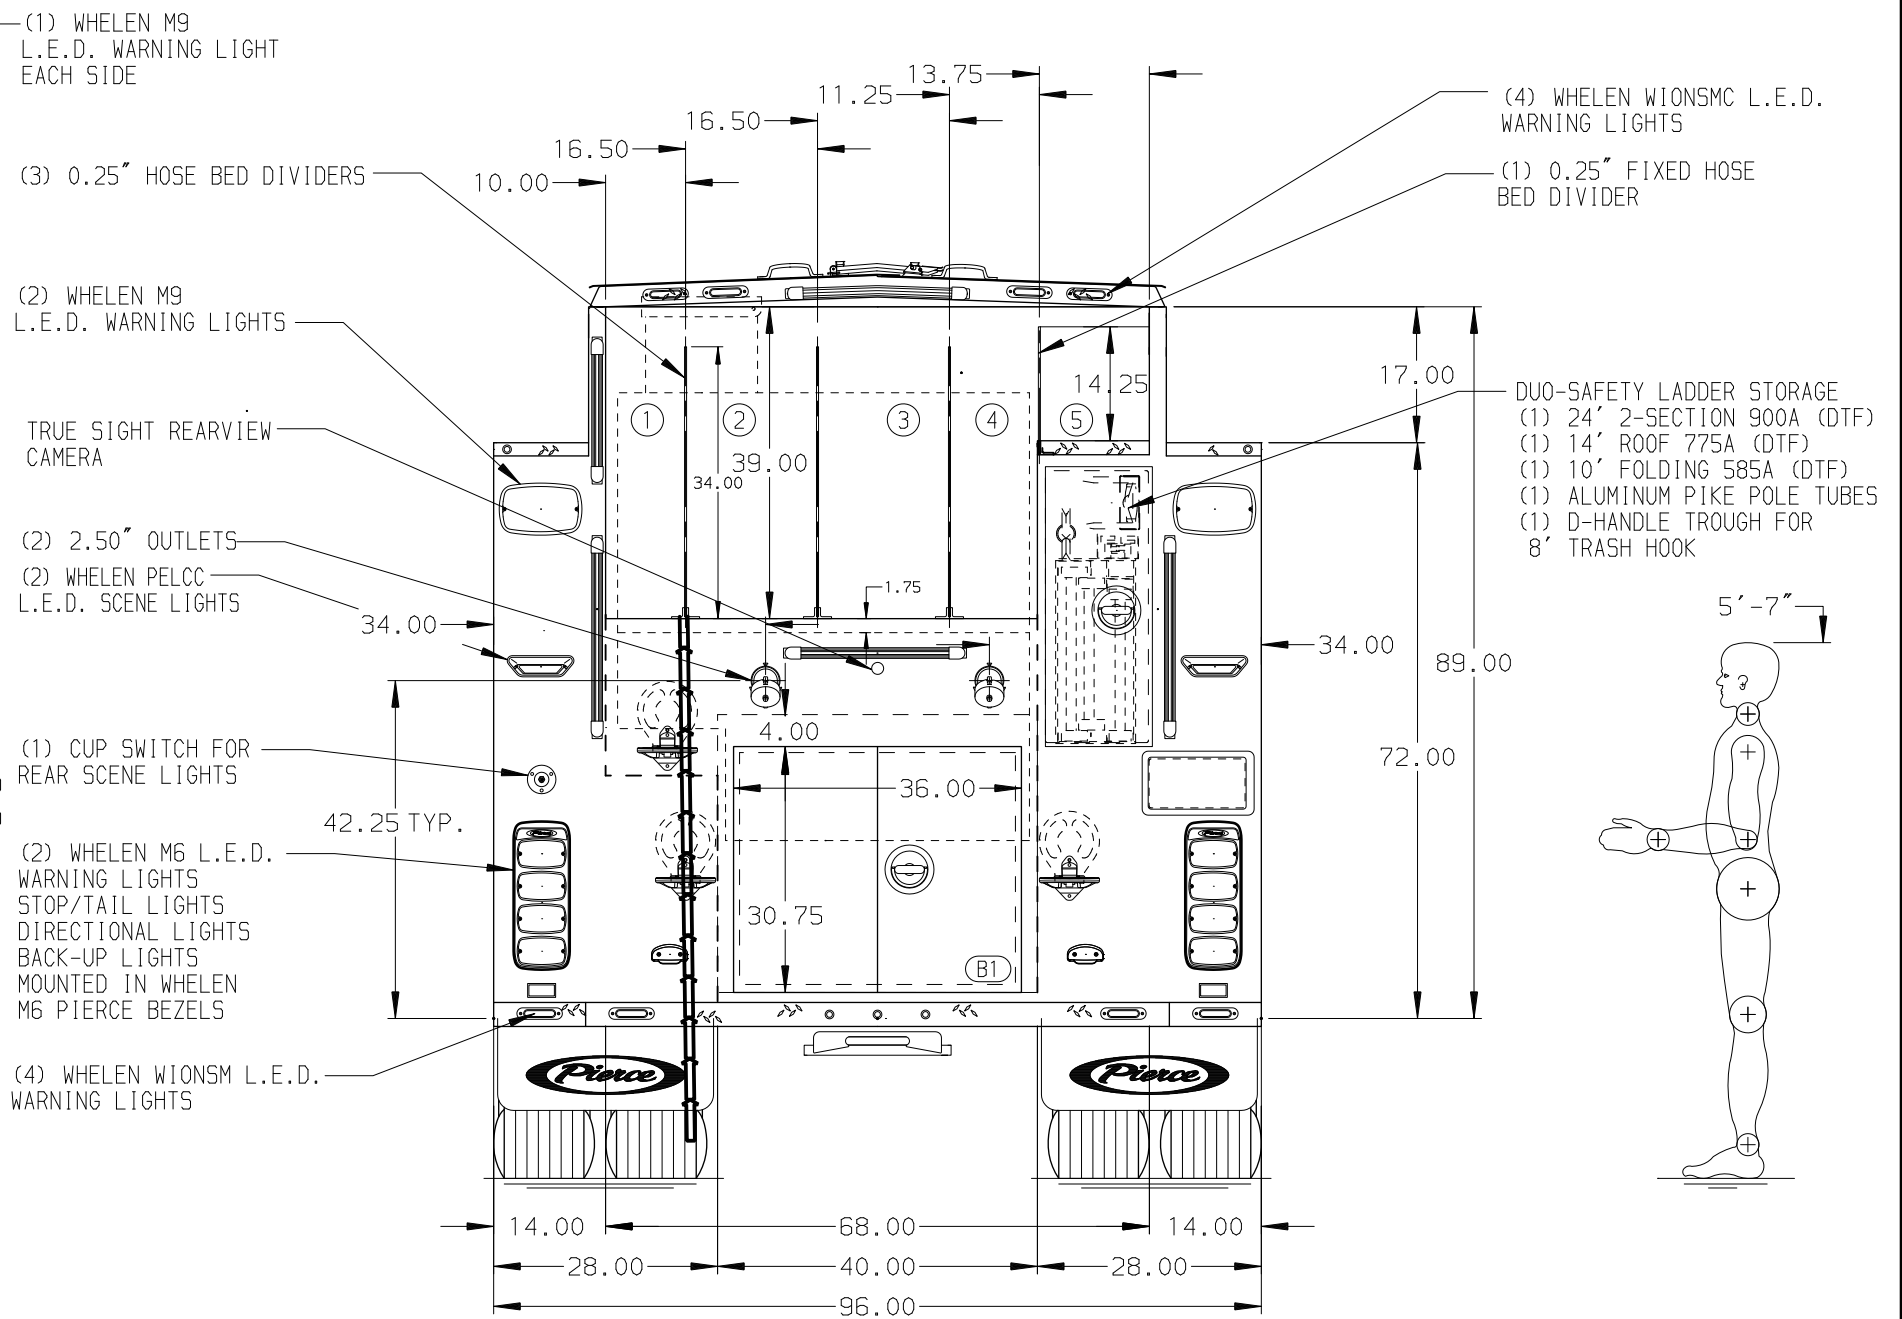

		JOB NO.	40132 01-02
		SCALE	DATE
		DRAWN BY	20SEP23
		CHECKED BY	27SEP23
		SHEET SIZE	SHEET NO.
		D	1 OF 1

Pierce Pumper Approval Drawing		TITLE	Pierce Pumper Approval Drawing
Lewisville Fire Department		FOR	Lewisville Fire Department
40132AD		DWG NO.	40132AD

31OCT24	LST	CHR	CHASSIS DATA
13MAY24	LST	CHR	MAKE
20MAR24	LST	CHR	PIERCE
13MAR24	LST	CHR	MODEL
REV	DATE	BY	CH ENFORCER