
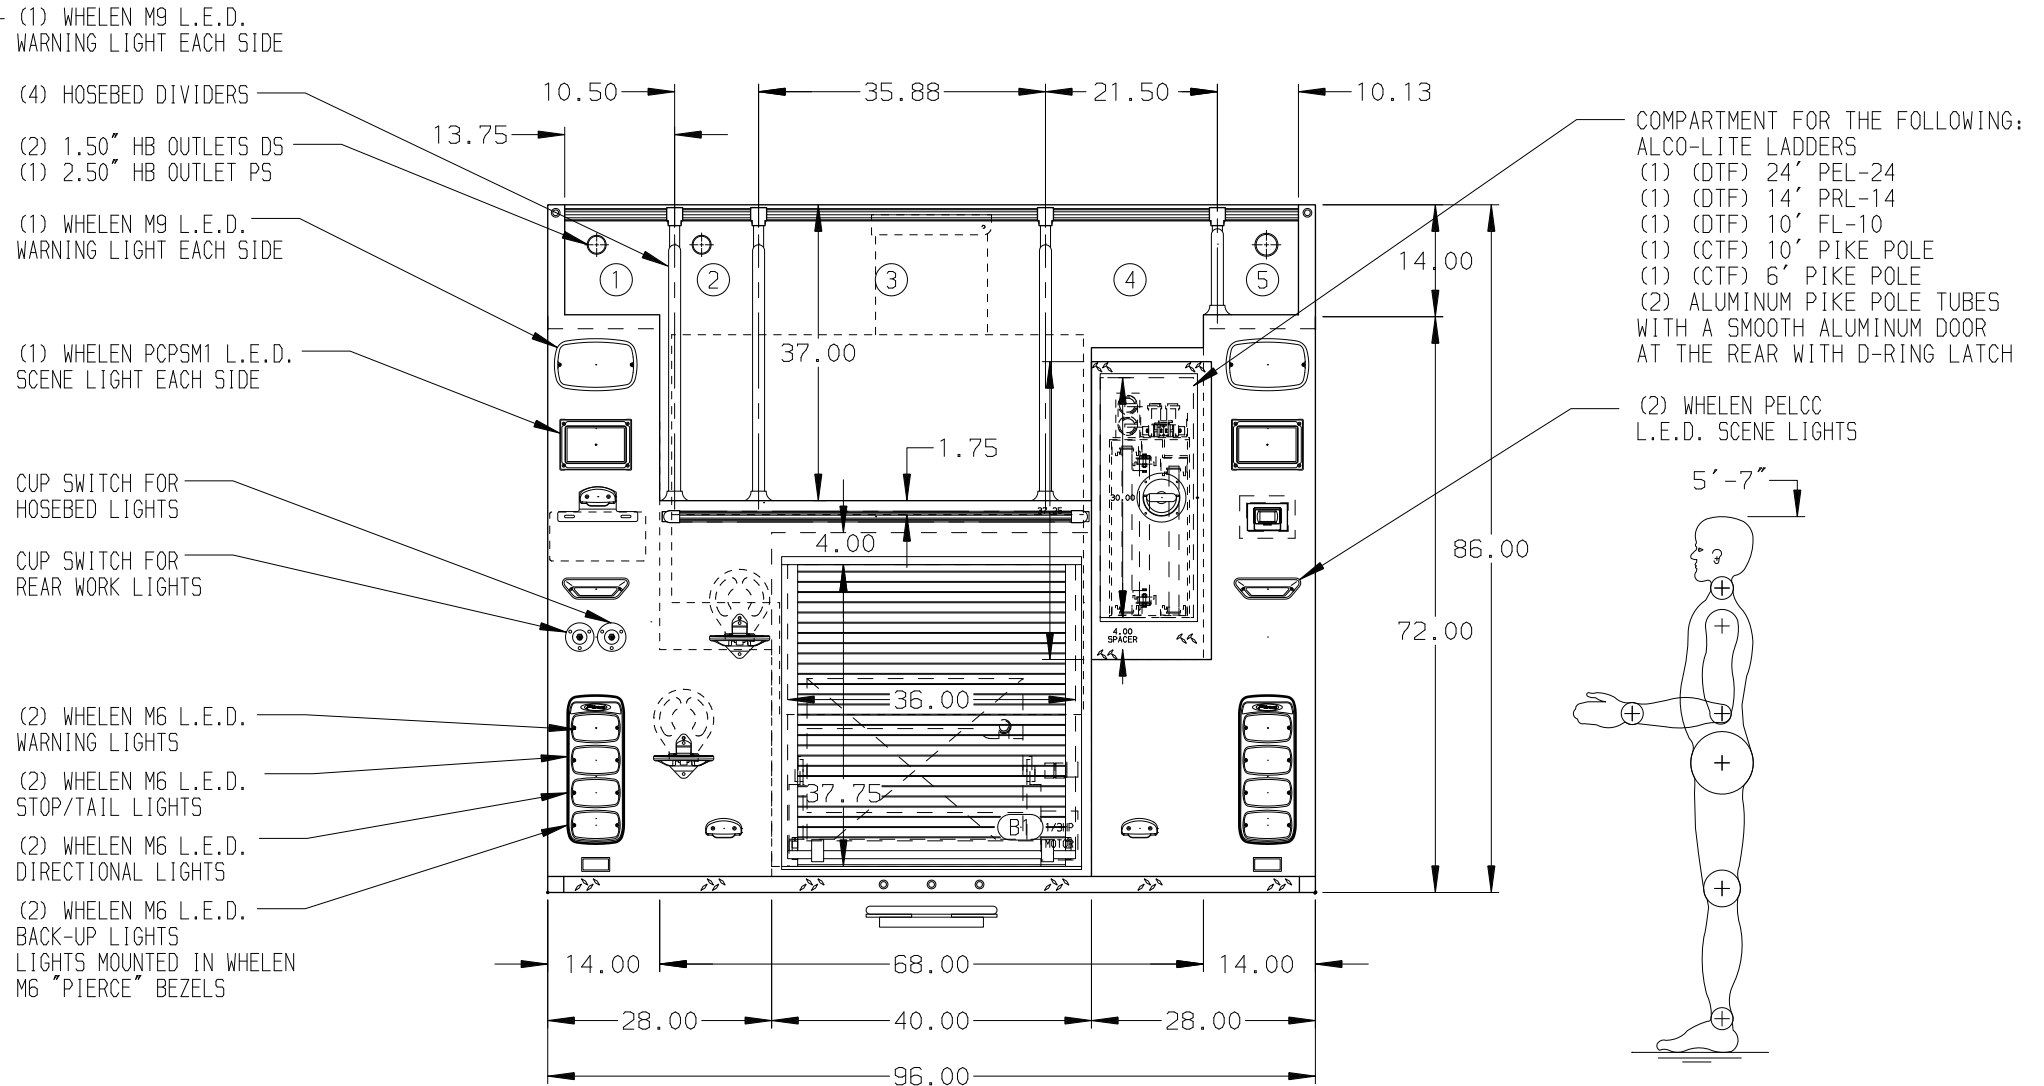
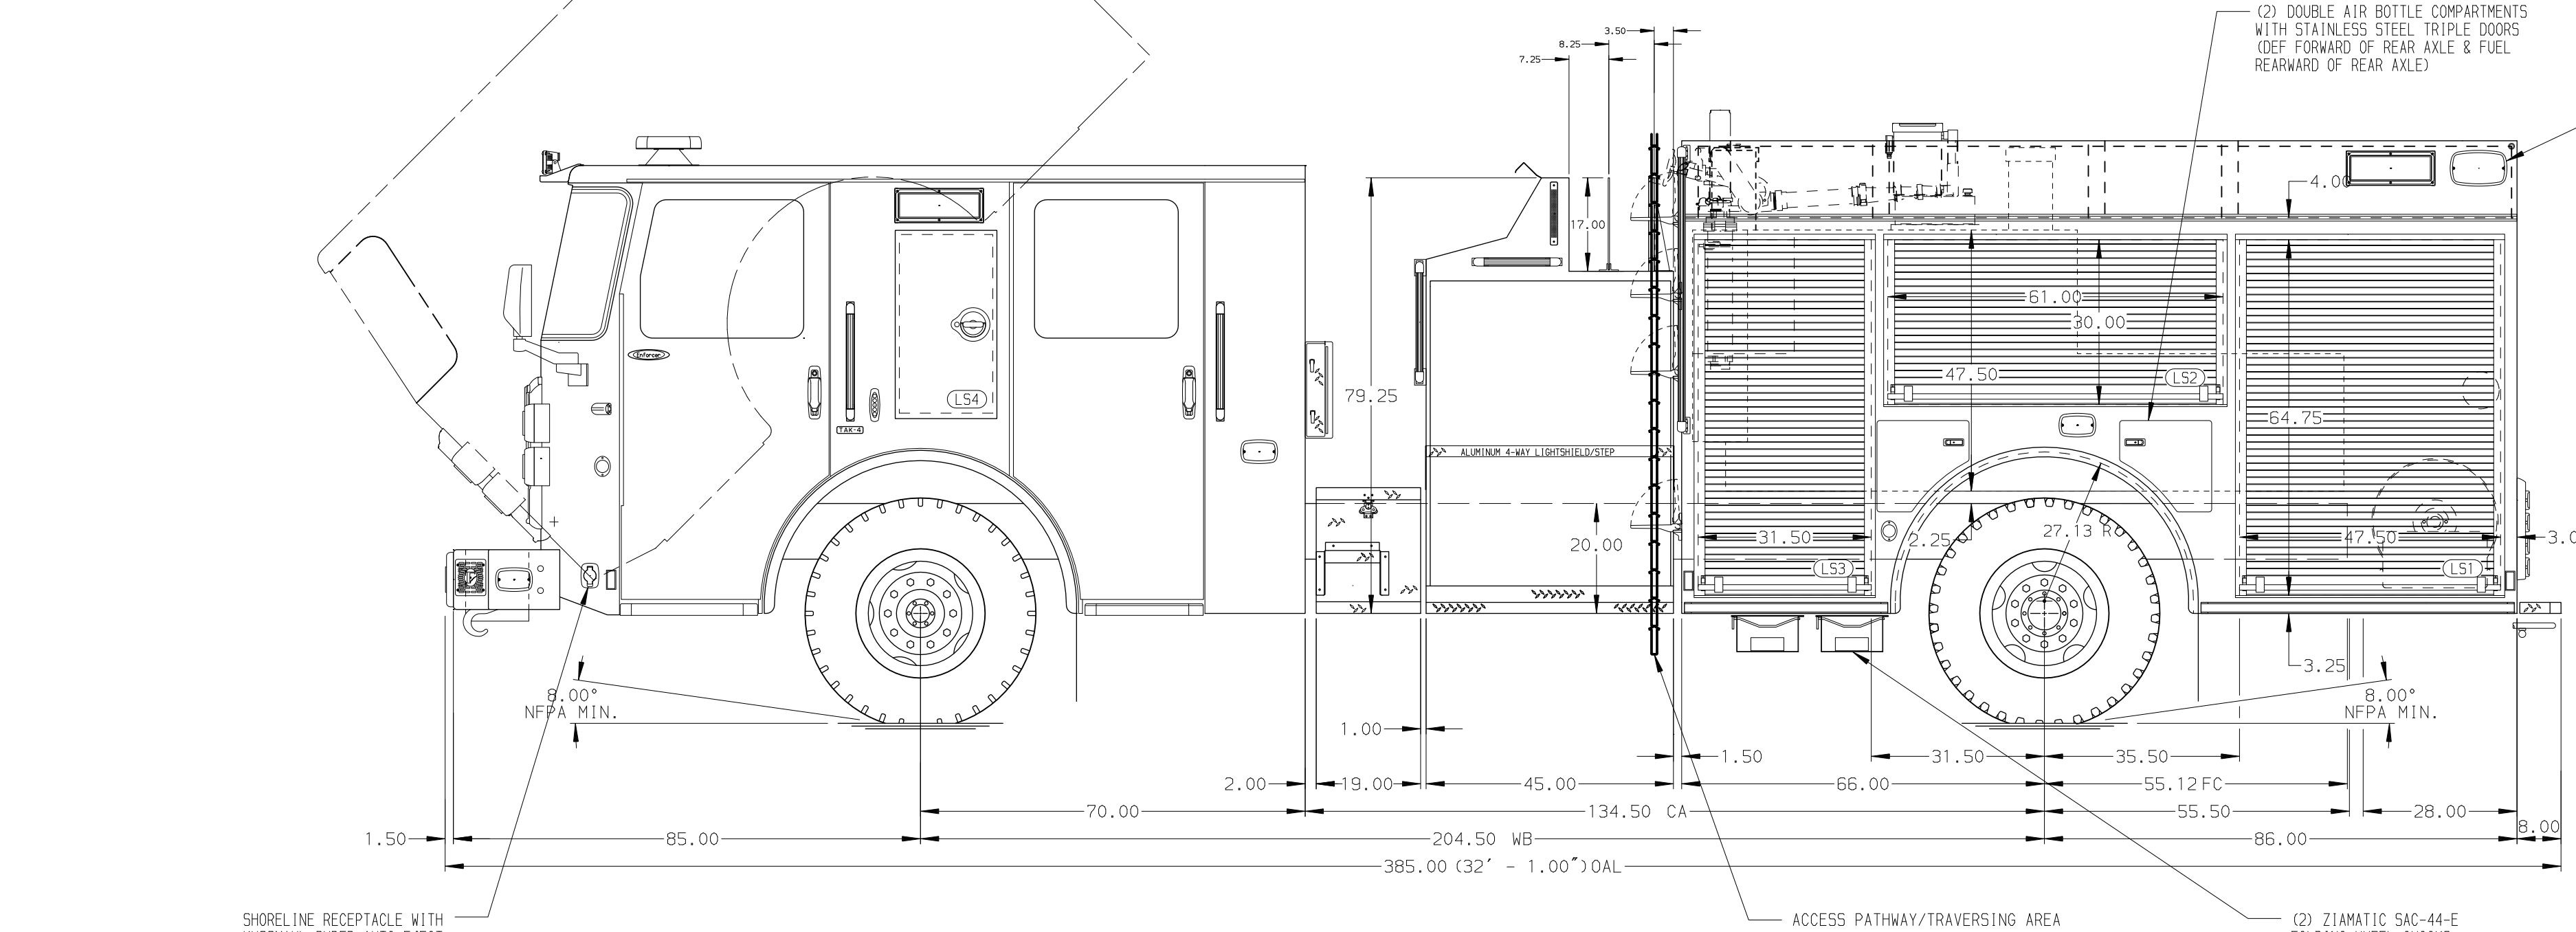


- HOSEBED CAPACITIES
- ① - 150' OF 1.75" D.J. POLY HOSE
 - ② - 250' OF 1.75" D.J. POLY HOSE
 - ③ - 1000' OF 5.00" D.J. POLY HOSE
 - ④ - 600' OF 2.50" D.J. POLY HOSE
 - ⑤ - 200' OF 2.50" D.J. POLY HOSE

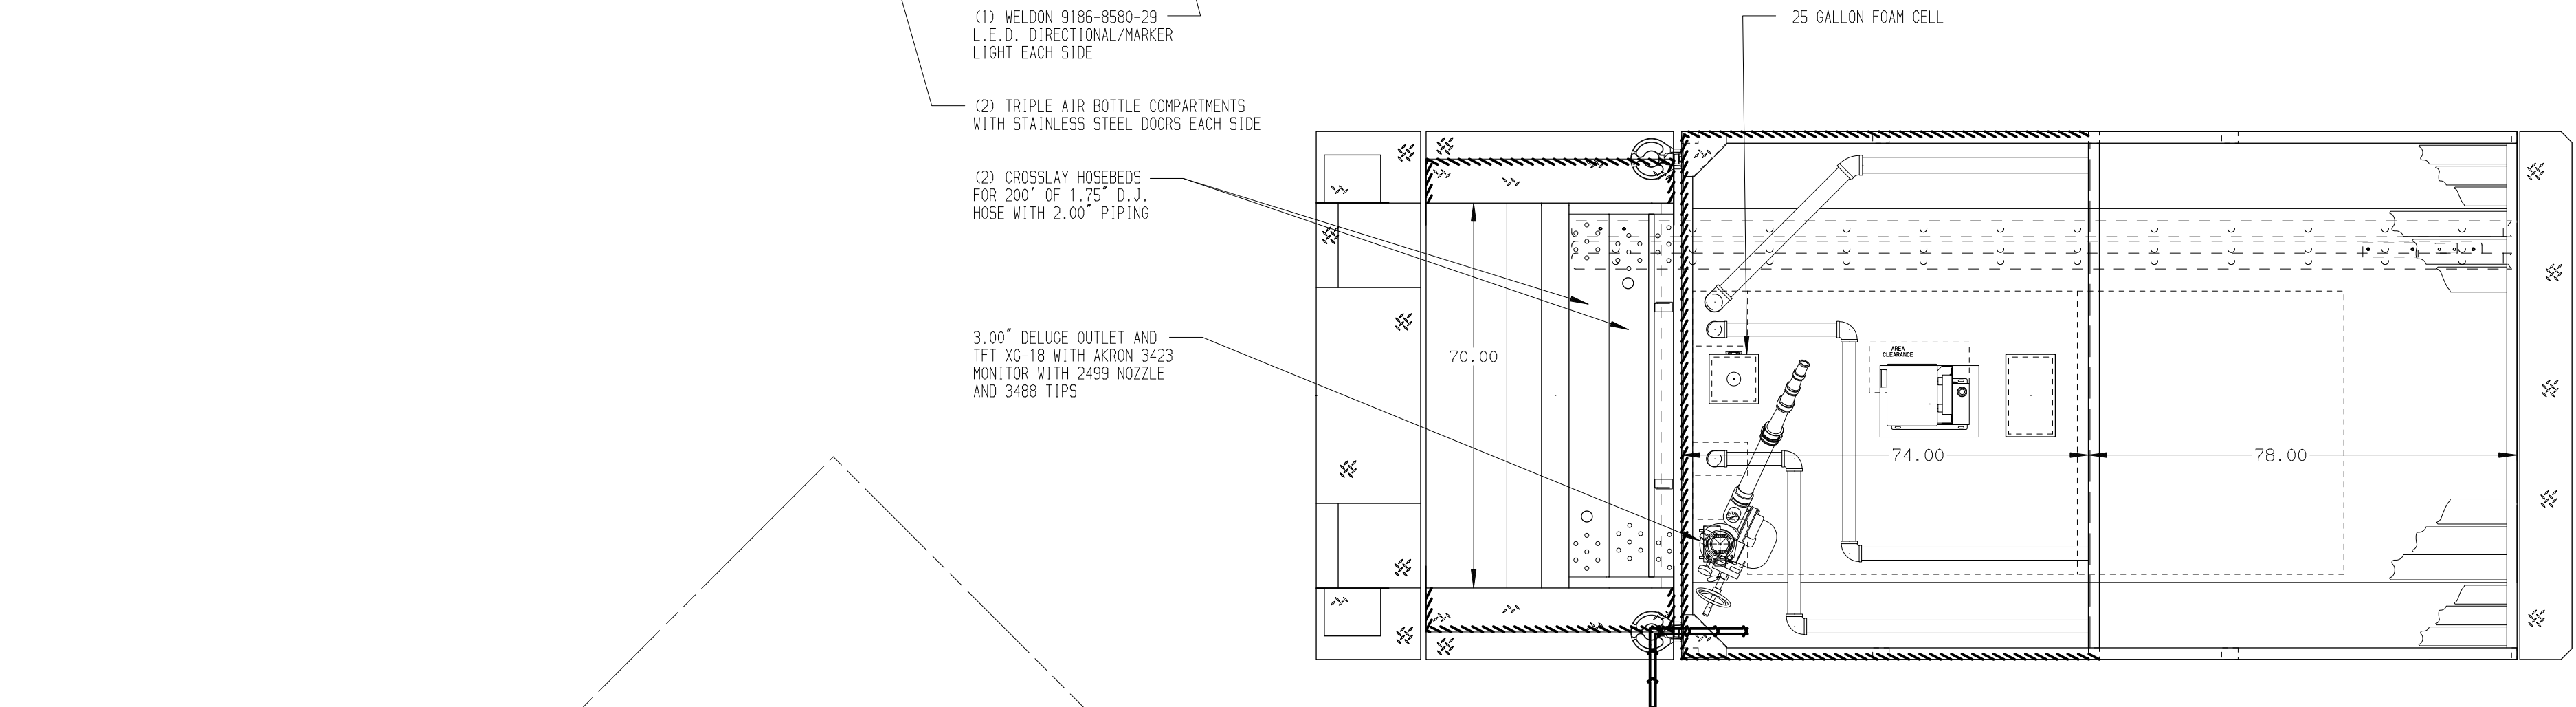

ALUMINUM BODY

MAXIMUM O.A.H. 113"

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING LOCATED AT DRIVER'S SIDE STEP AREA FORWARD
- BATTERY CHARGER LOCATED BEHIND THE DRIVER SEAT
- BATTERY CHARGER INDICATOR LOCATED AT DRIVER'S SIDE STEP AREA
- JUMPER STUDS LOCATED AT DRIVER'S SIDE STEP AREA
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED ON COMPARTMENT LS1, LS2, LS3, RS1, RS2, RS3 & B1
- PULL STRAP FOR DOORS ON ALL SIDE BODY COMPARTMENT DOORS
- ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENT LS3, TWO IN RS3
- ONE SWING-OUT TOOLBOARD IN COMPARTMENT RS2
- ALL BODY COMPARTMENTS WITH LOUVERS SHALL HAVE A REMOVABLE FILTER

- ALUMINUM PEGBOARD WITH TRACKS ON THE BACK WALL OF COMPARTMENT LS1, LS2, LS3, RS1 & RS2
- ONE HANNAY BOOSTER REEL WITH CAPACITY FOR 200' OF 1.00" HOSE AND 1.50" PIPING LOCATED IN COMPARTMENT B1 (EF34-23-24)
- HOWLER SIREN SPEAKER SYSTEM MOUNTED BEHIND FRONT BUMPER

REV	DATE	BY	CH	ENFORCER

		JOB NO.	33363
		SCALE	1:24
		DATE	
		DRAWN BY	AMI
		CHECKED BY	CCA
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE 2000-D-725P W/25G FOAM CELL, 152" PUMPER, (2)XLAYS
FOR TOPEKA
TOPEKA, KANSAS

DWG NO. 33363AD