


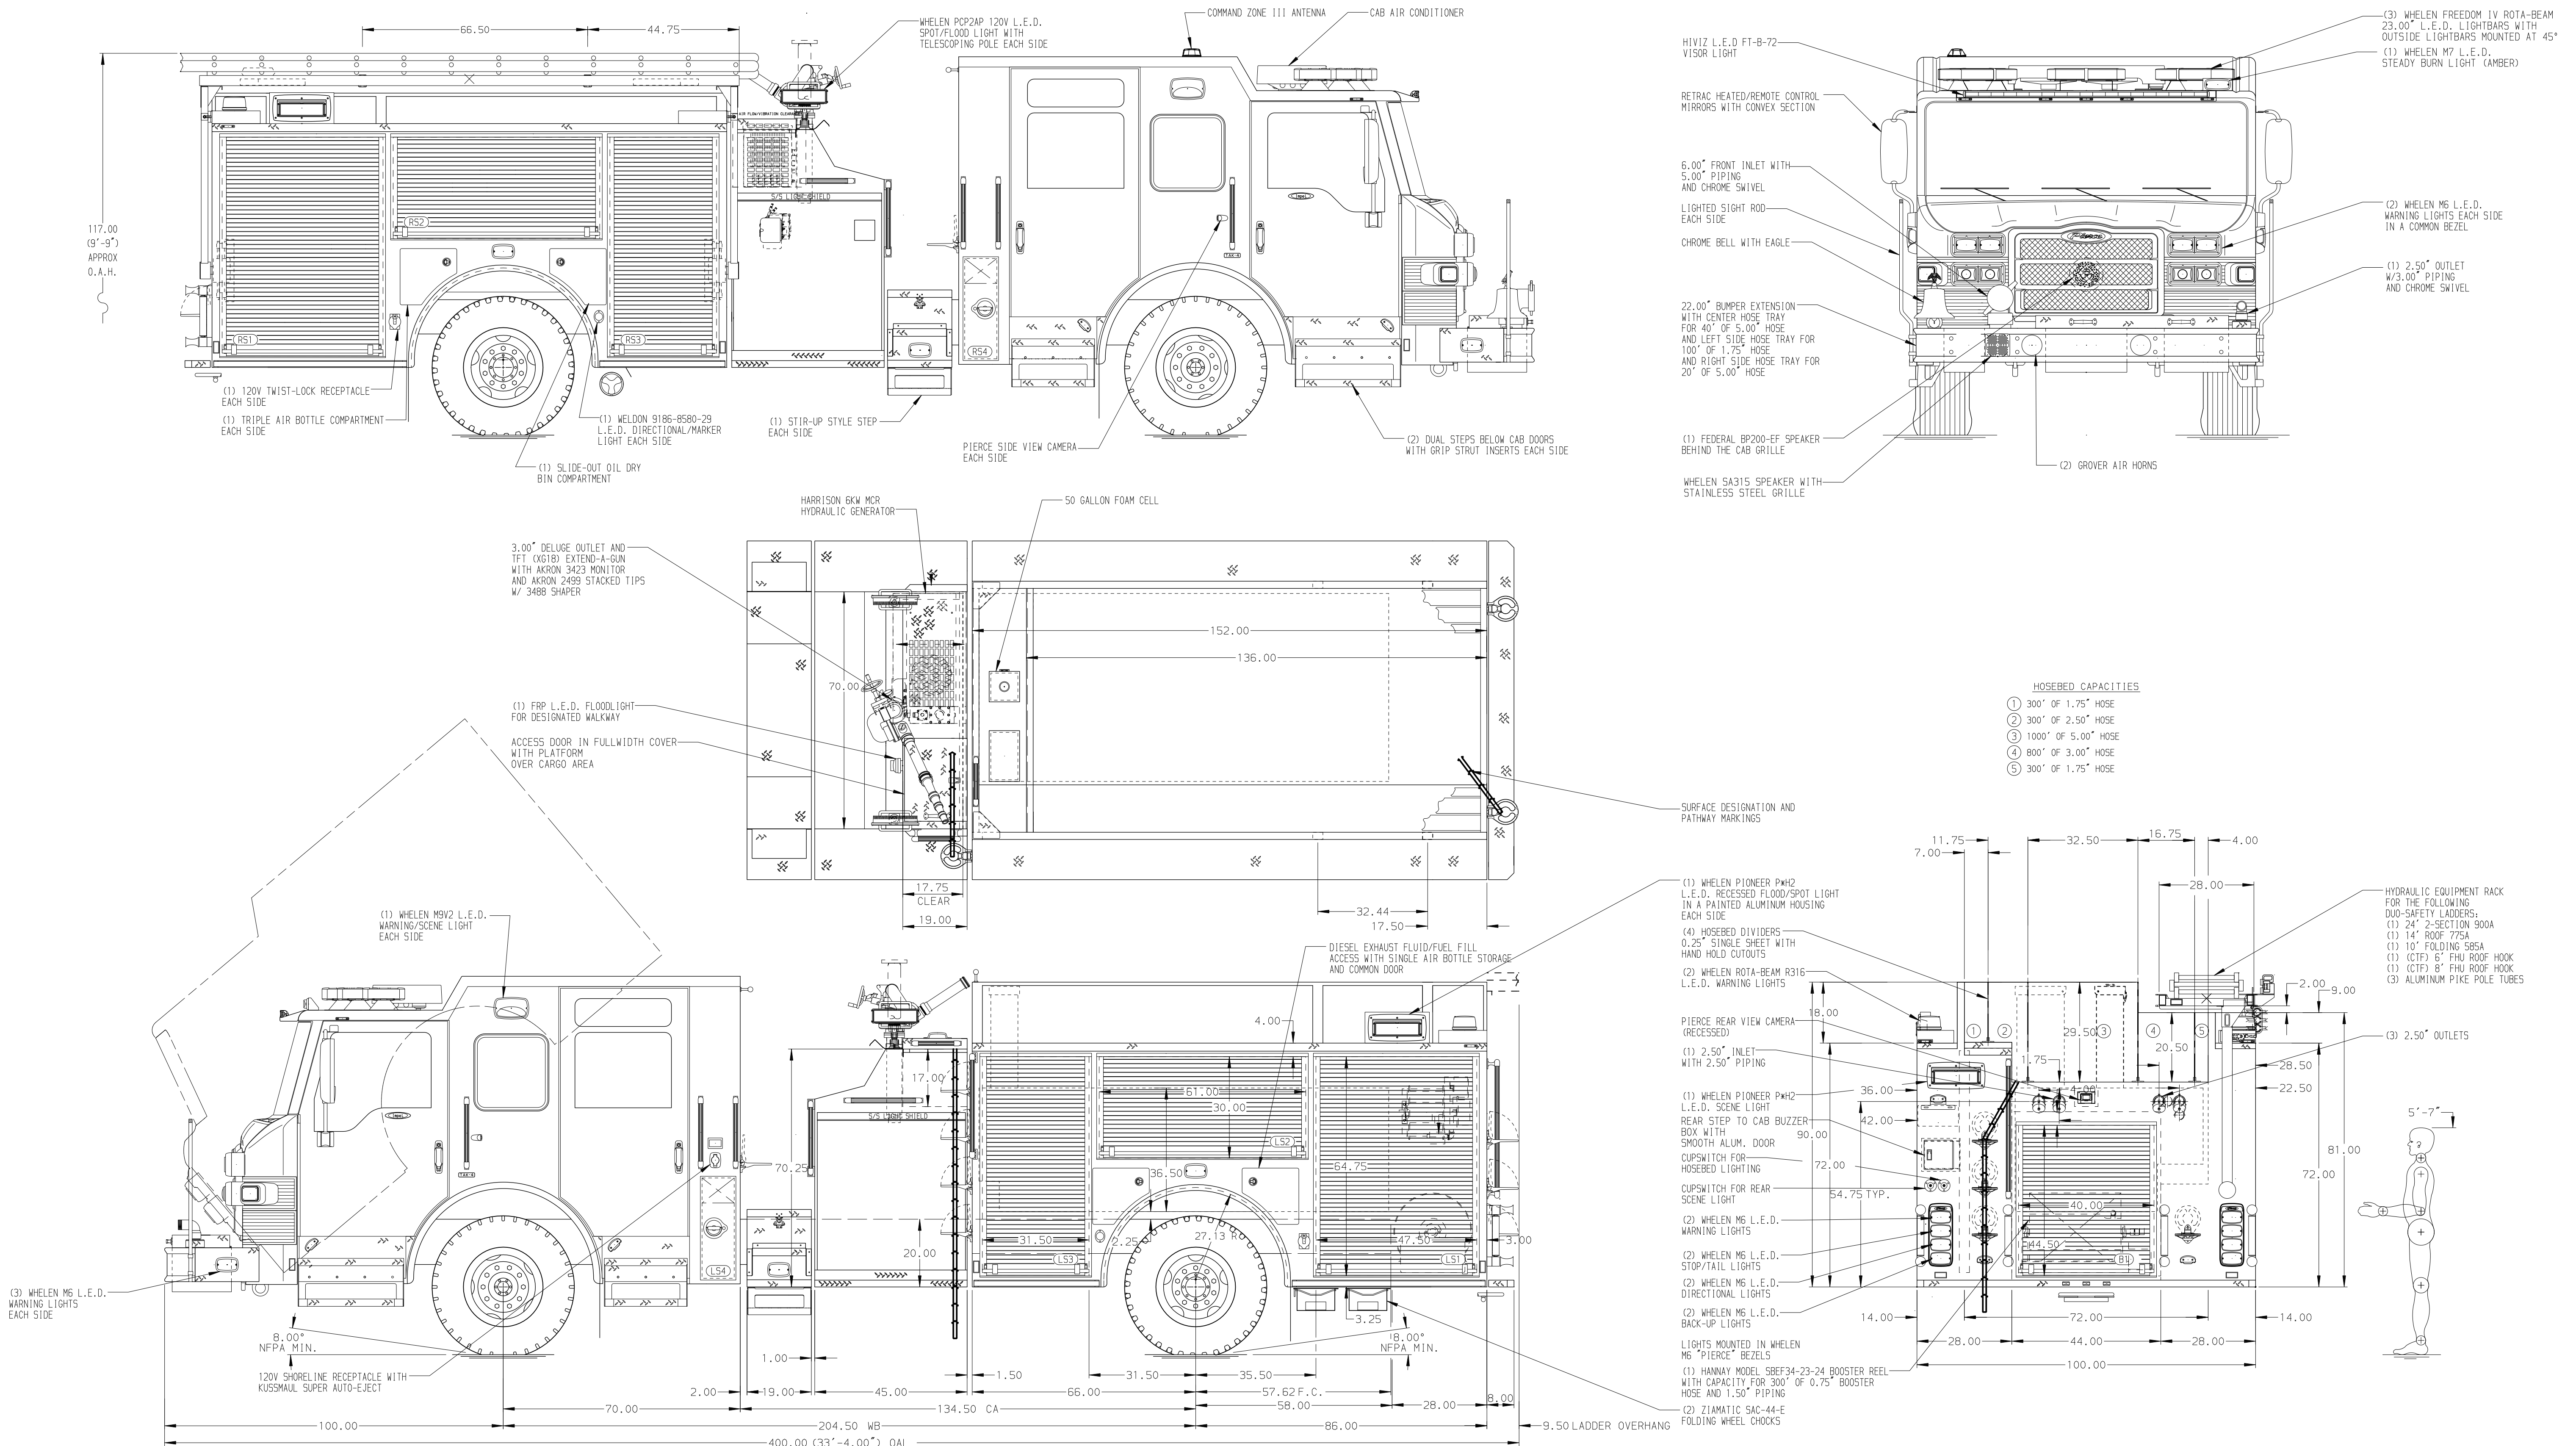

ALUMINUM BODY MAXIMUM O.A.L. 400.00" MAXIMUM O.A.H. 117.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET/OUTLET W/ DISCONNECT FITTING ON THE D.S. PUMP PANEL
- PIERCE CAMERA ON THE REAR OF THE CAB
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGER INDICATOR LOCATED BEHIND THE CREW CAB DOOR
- ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 WITH 200' OF 10/3 CABLE IN L51
- (2) WHELEN 12 V PSL1R54 SLIMLINE L.E.D. RECESSED SCENE LIGHTS ON THE BACK OF THE CAB

REV	DATE	BY	CH	IMPEL
05APR19	LST	MSA	MAKE	
12MAR19	LST	MSA	PIERCE	
07FEB19	LST	AZA	MODEL	

		JOB NO.	33455 01-02
MANUFACTURING INC.		SCALE	1:24
TITLE		DRAWN BY	LST
FOR		CHECKED BY	AZA
DWG NO.		SHEET SIZE	D
DATE		SHEET NO.	1 OF 1

1500-D-800P, 750 GAL OF WATER W/ 50 GAL FOAM CELL
152" BODY, HYDRAULIC LADDER RACK, DELUGE

BRENTWOOD FIRE DISTRICT
BRENTWOOD, NEW YORK

33455AD-SH1