

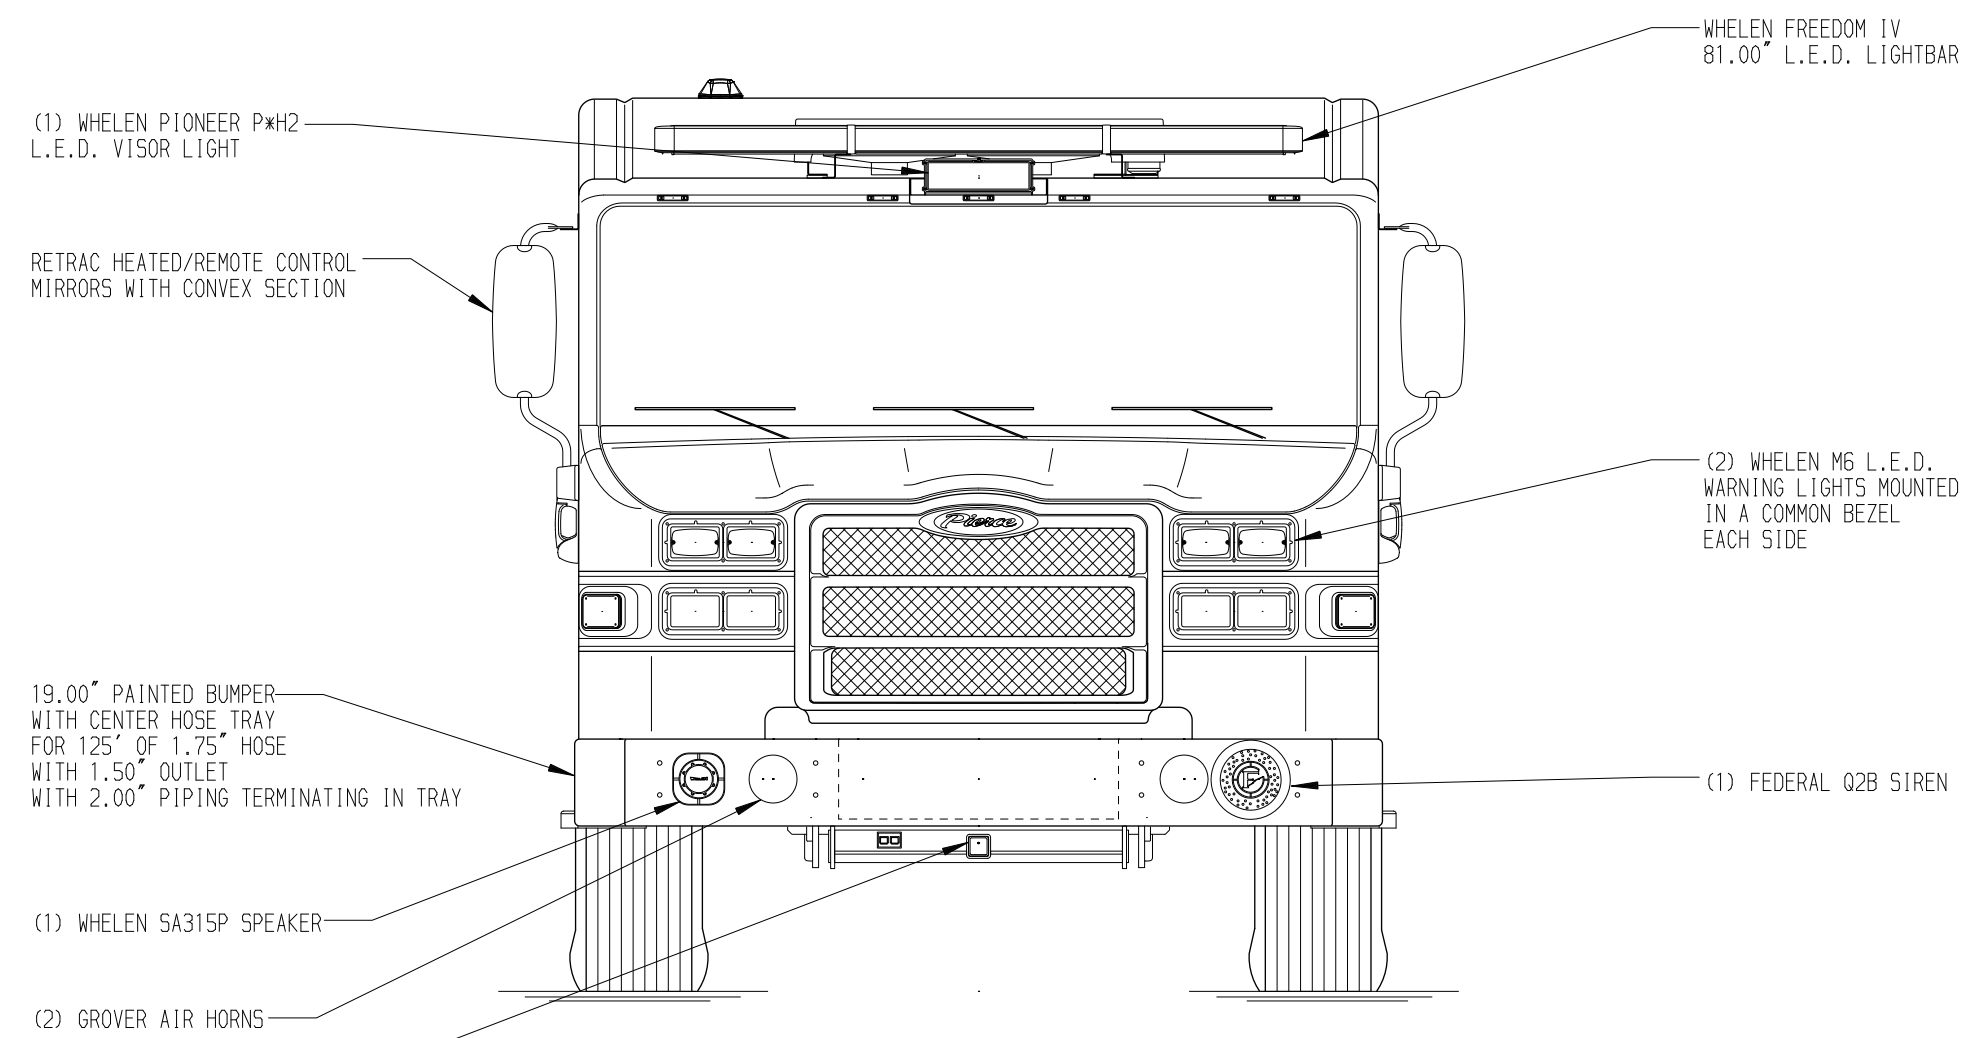
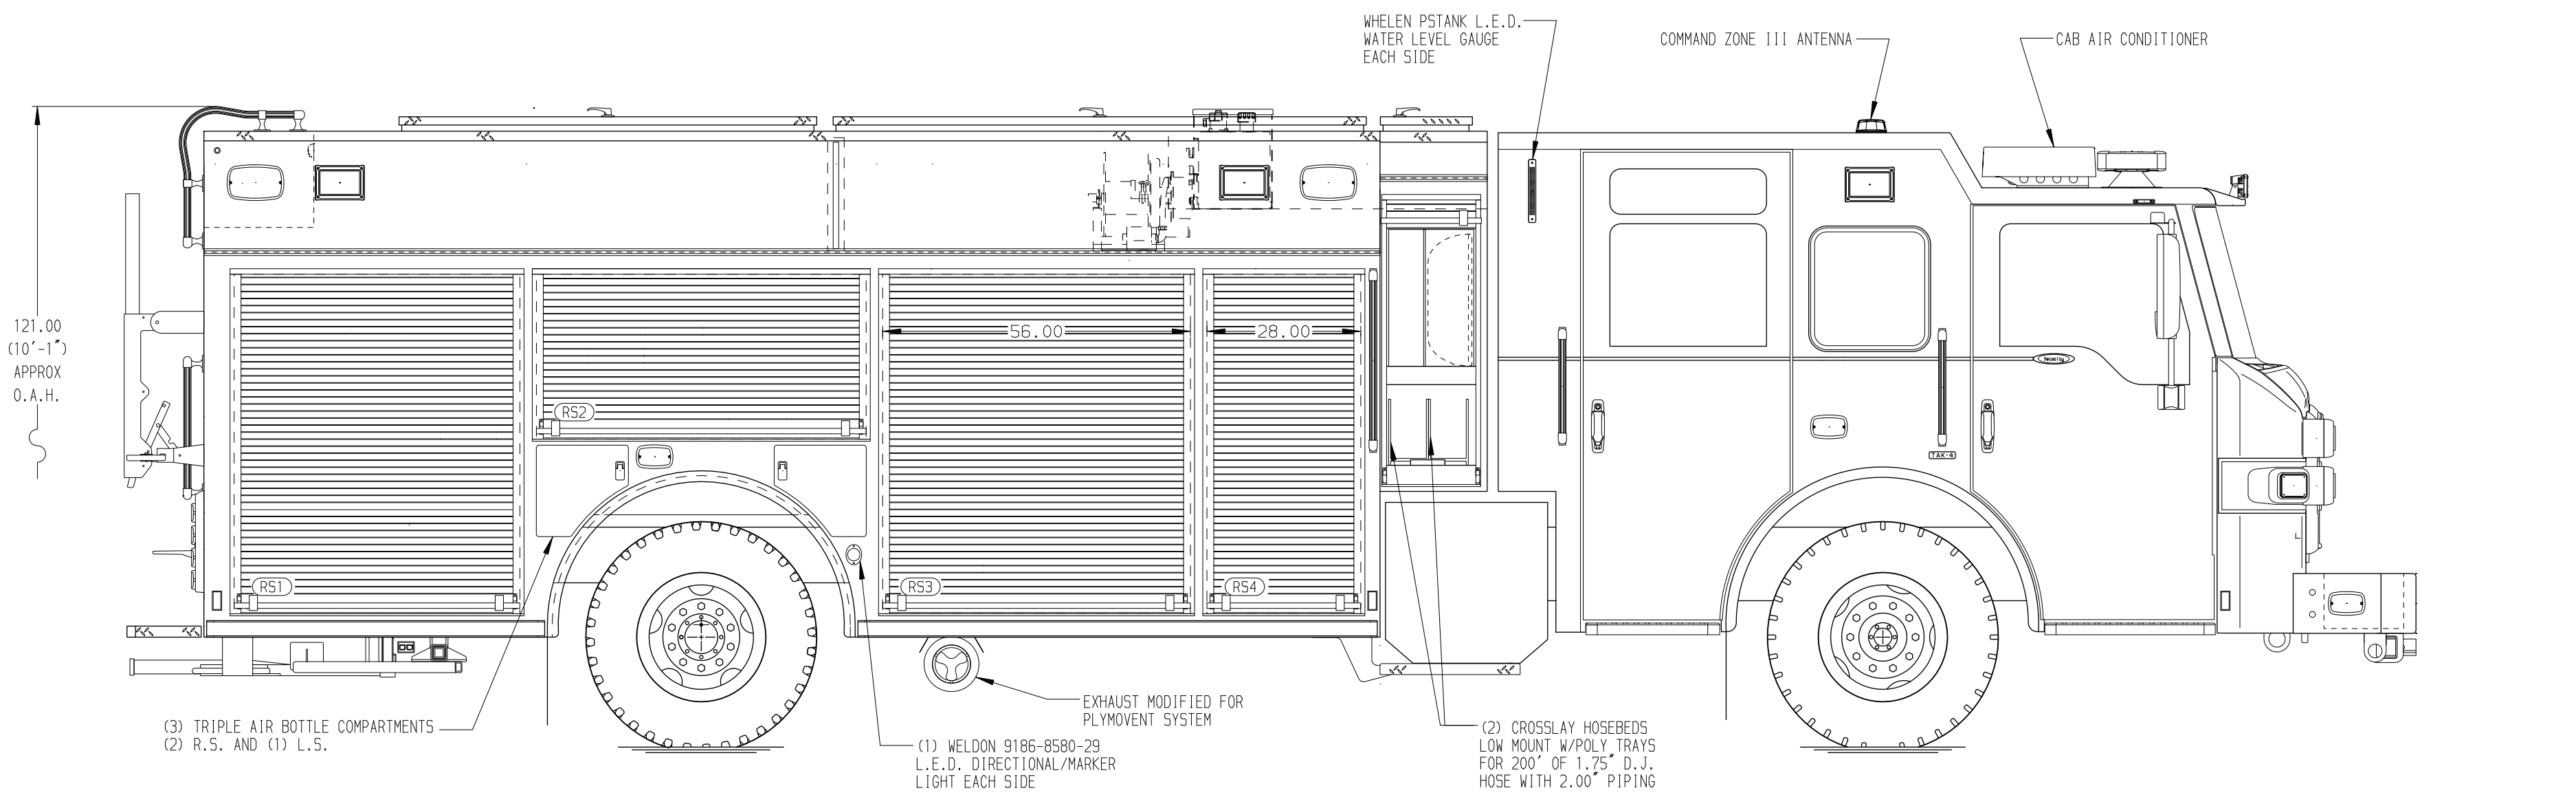


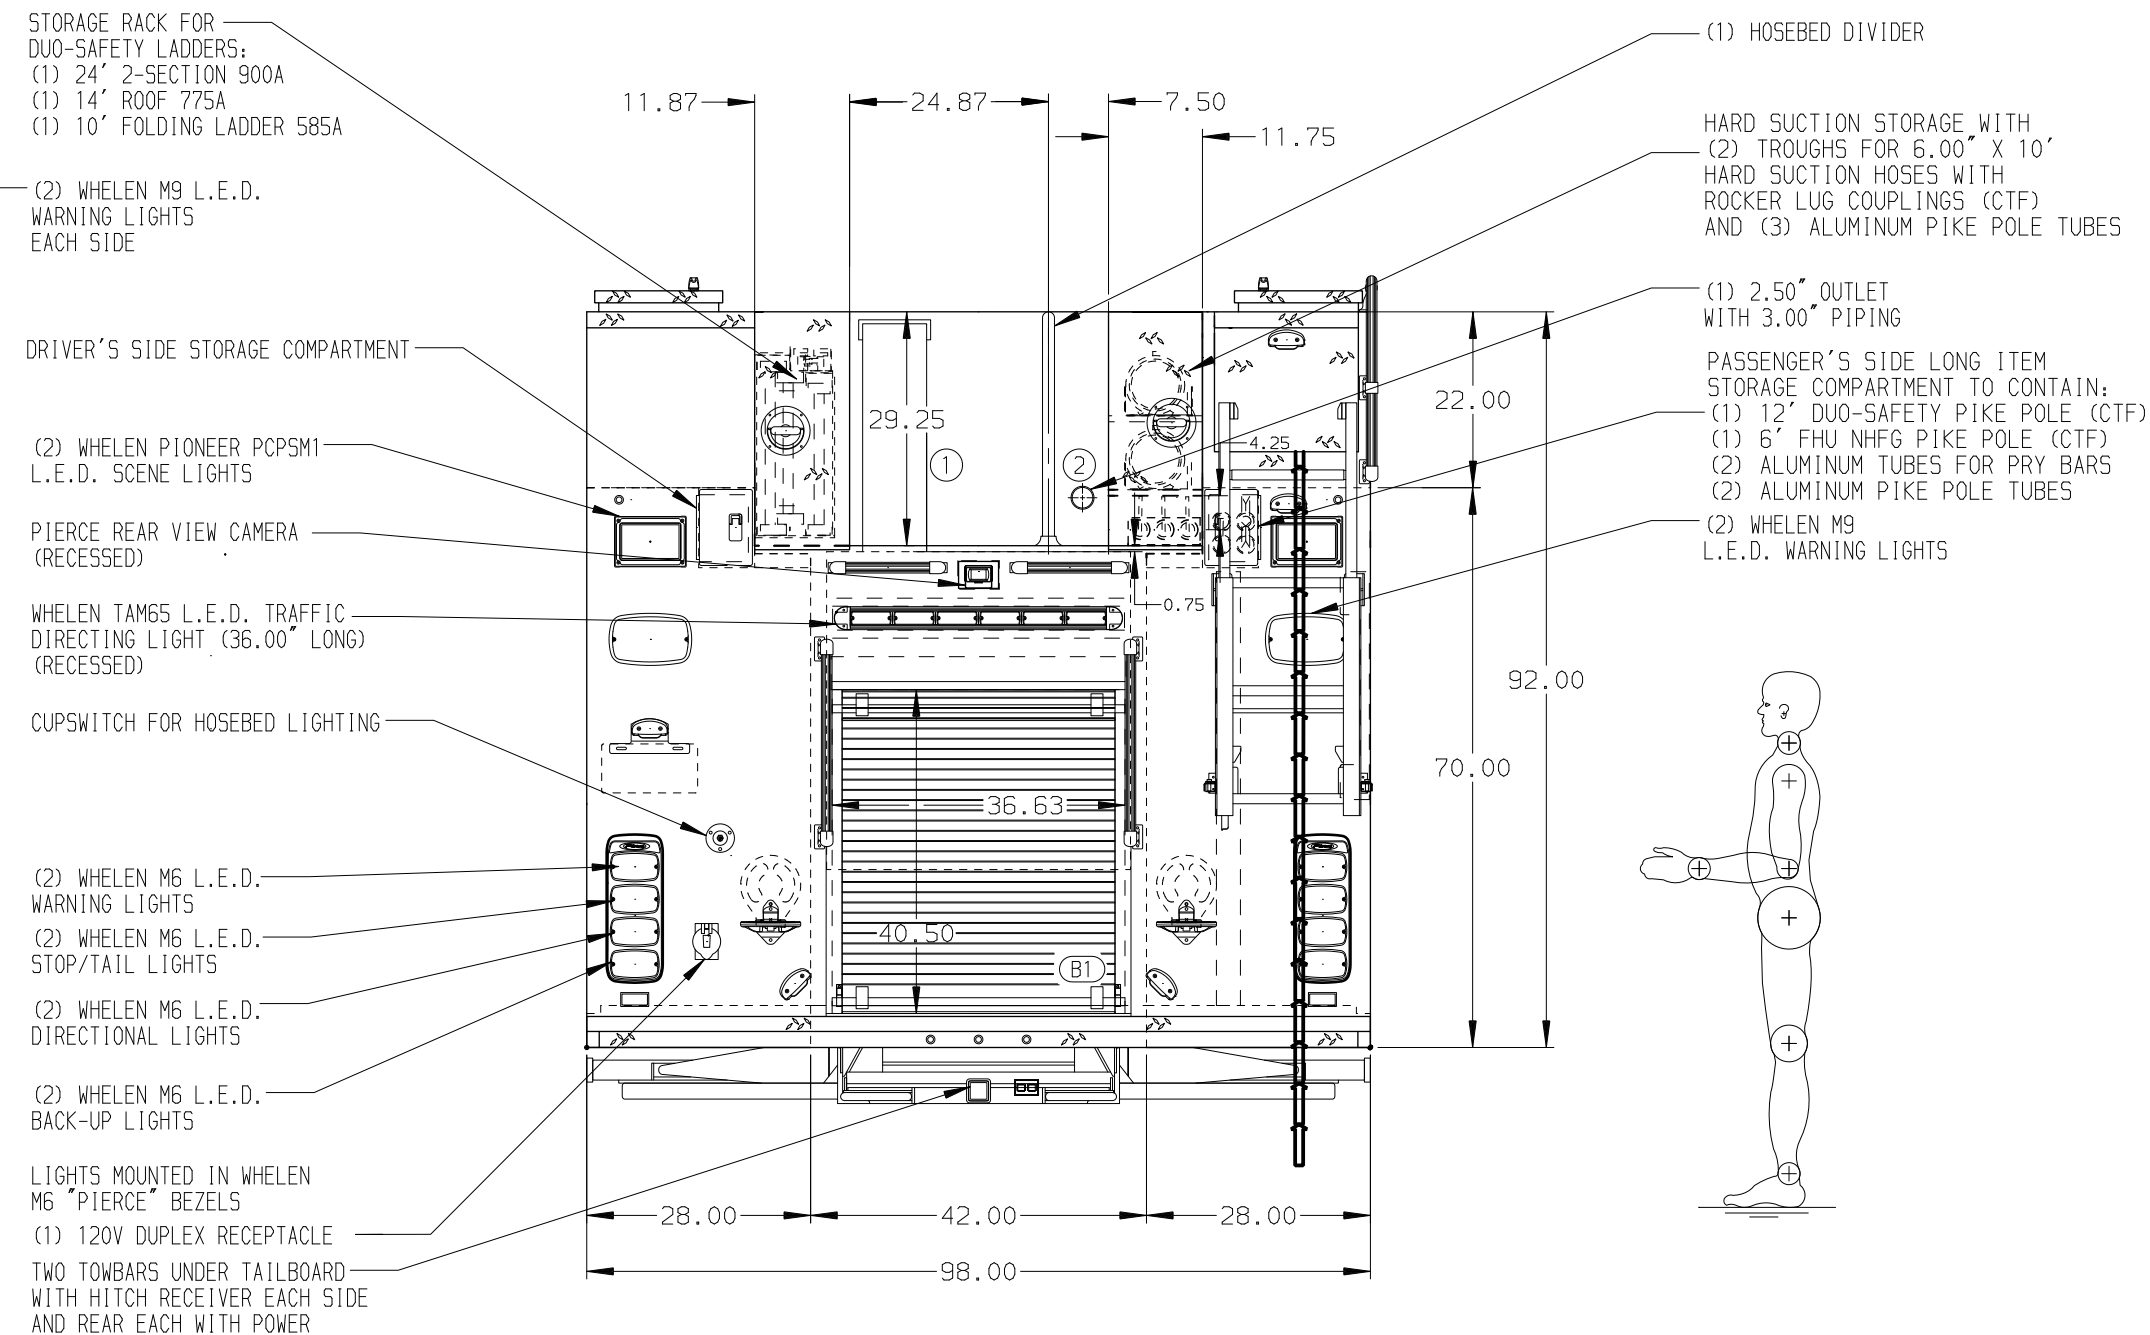

HOSEBED CAPACITIES
① 600' OF 5.00" HOSE
② 250' OF 2.50" HOSE

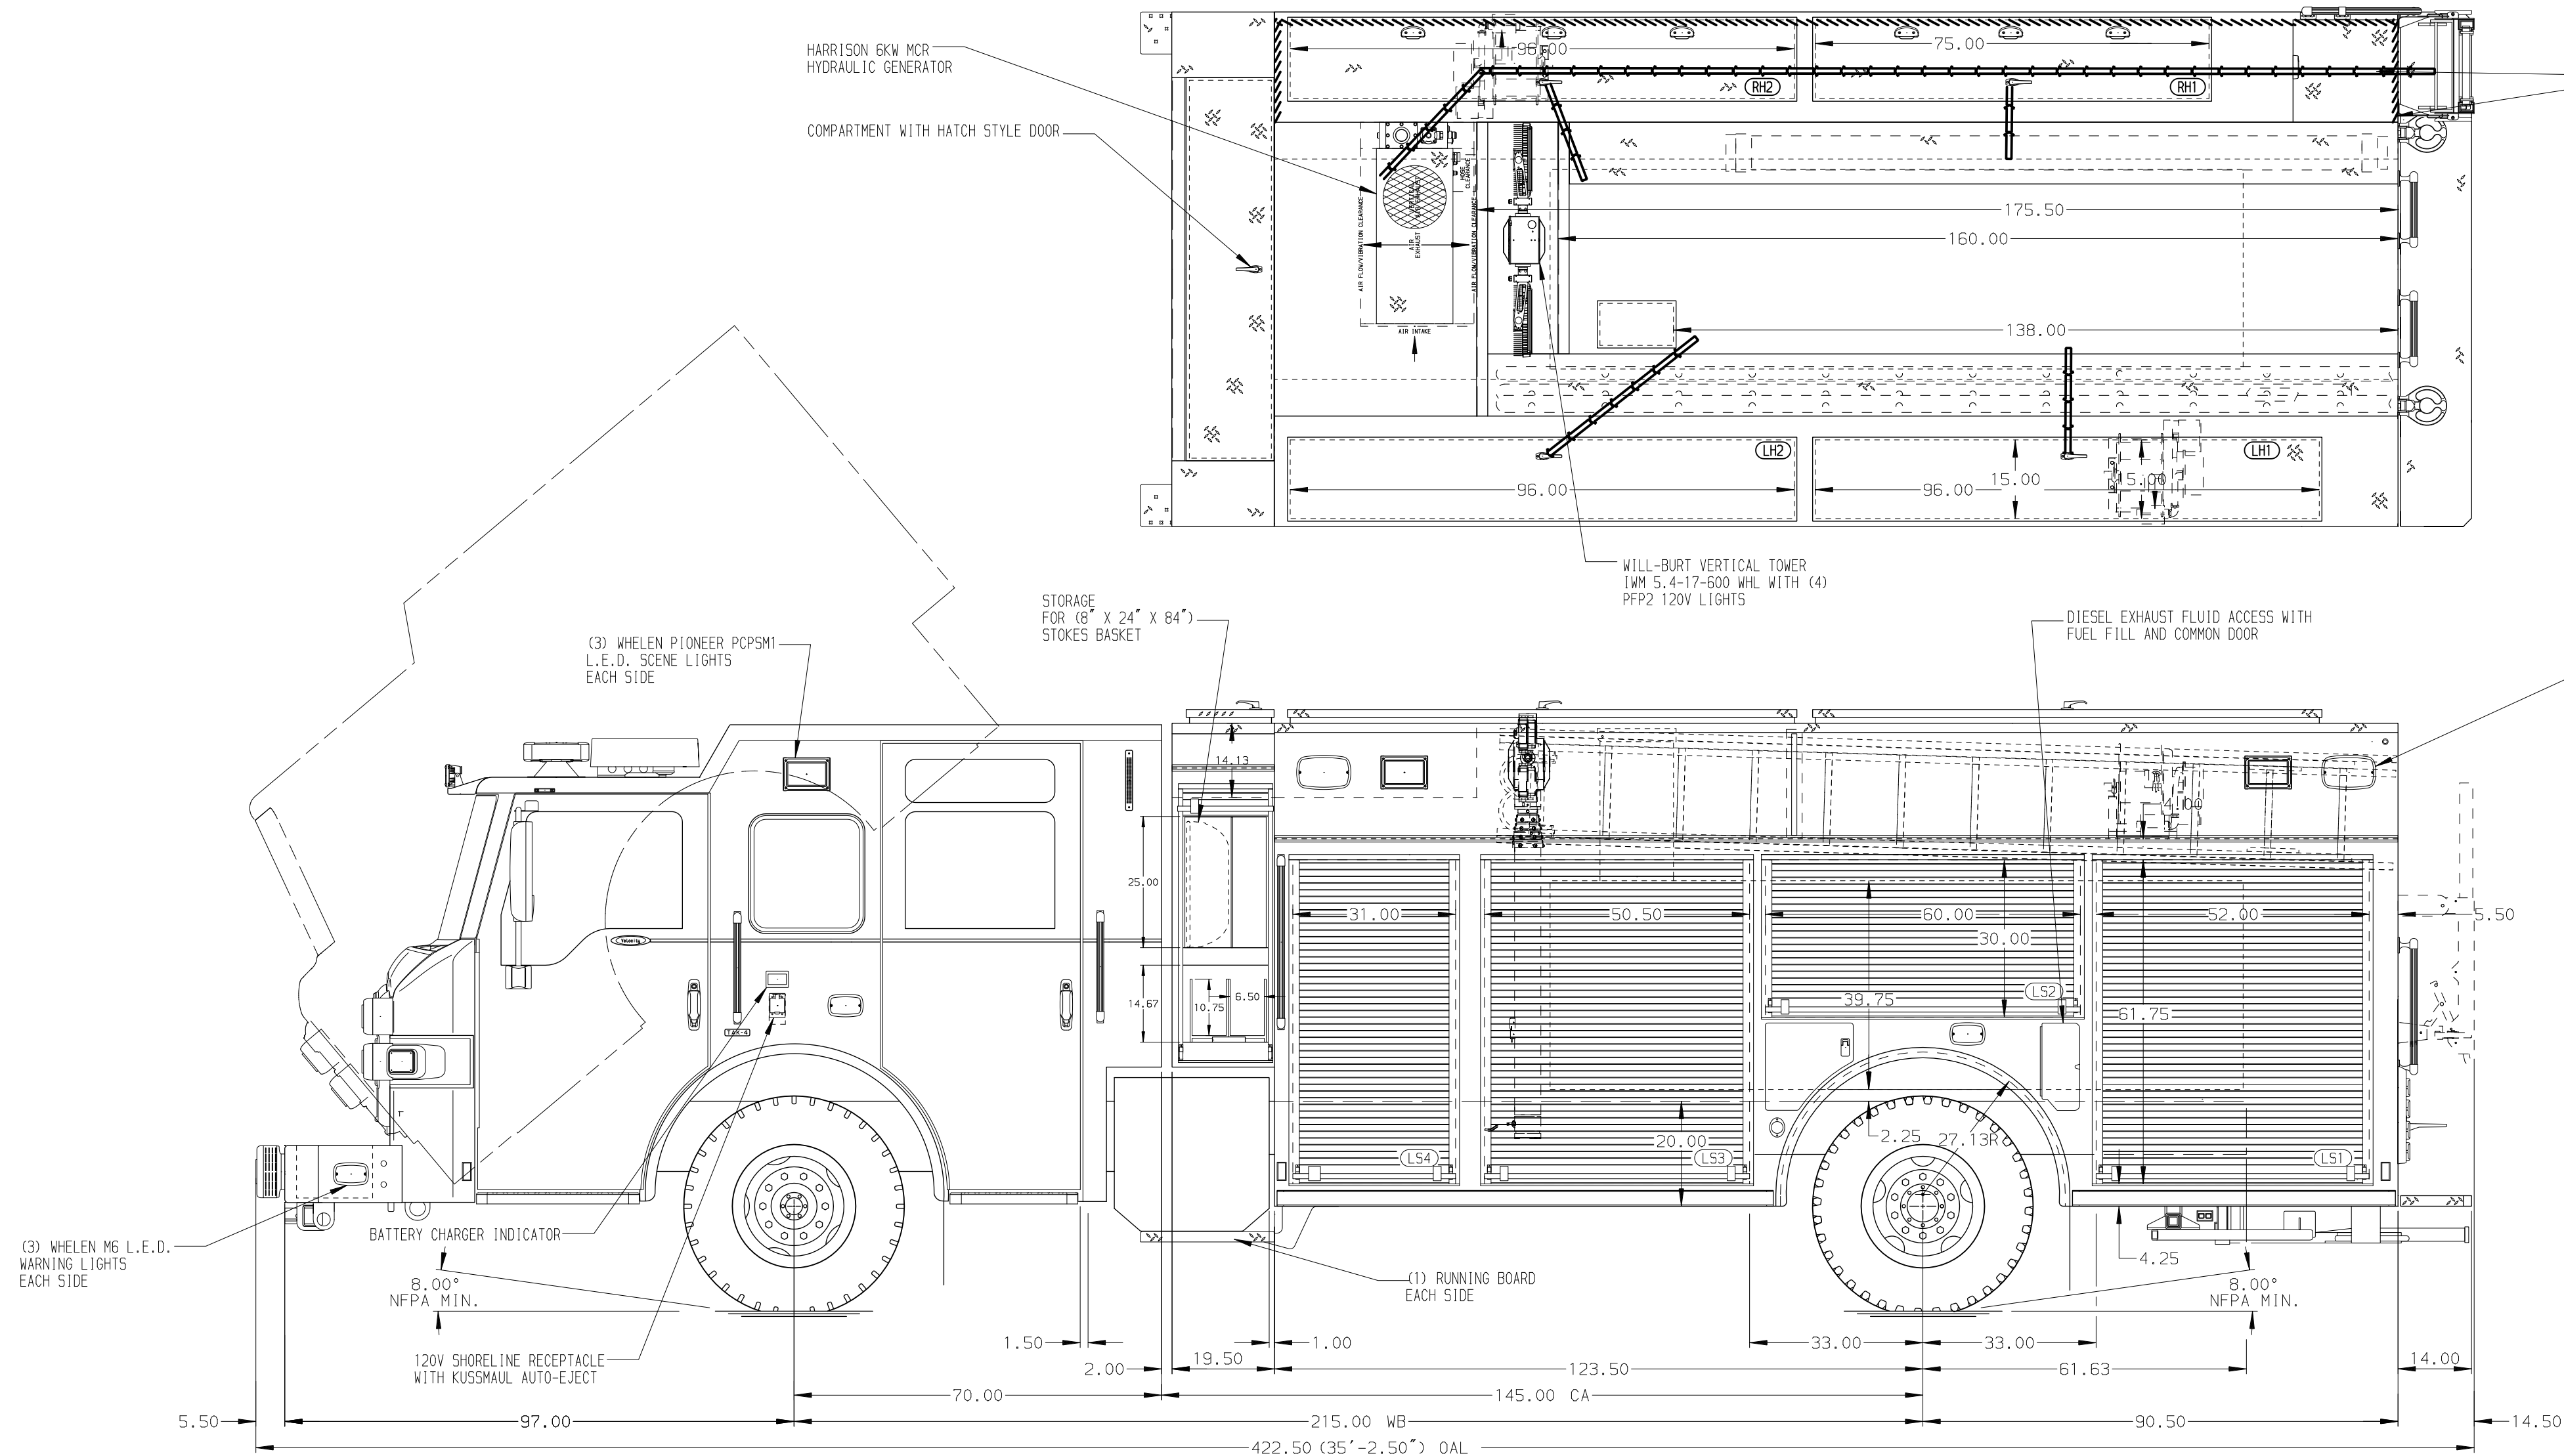

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT THE REAR
2. AIR INLET WITH DISCONNECT COUPLING ON D.S. STEP WELL
3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
4. WHEEL CHOCKS AND BRACKETS (CTF)
5. 120V NEMA DUPLEX RECEPTACLE BEHIND THE DRIVER'S SEAT
6. 120V 6-PLACE RECEPTACLE BEHIND THE OFFICER'S SEAT

15JUL19	LST	CSH	CHASSIS	DATA
13MAY19	LST	CSH	MAKE	PIERCE
02MAY19	LST	CSH	MODEL	VELOCITY
12APR19	LST	CSH	DATE	BY
11FEB19	AMI	AZA	CH	VELOCITY
REV	DATE	BY	CH	VELOCITY

Pierce MANUFACTURING INC.		JOB NO.	33510
		SCALE	1:24
		DATE	
		DRAWN BY	LST
		CHECKED BY	AZA
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE
1500-D-750 GAL POLY, 214" PUC RESCUE
LADDERS IN HOSEBED, (2) X-LAYS, LIGHT TOWER
FOR
BURLINGTON VOLUNTEER FIRE DEPARTMENT
BURLINGTON, CONNECTICUT
DWG NO.
33510AD-SH1