

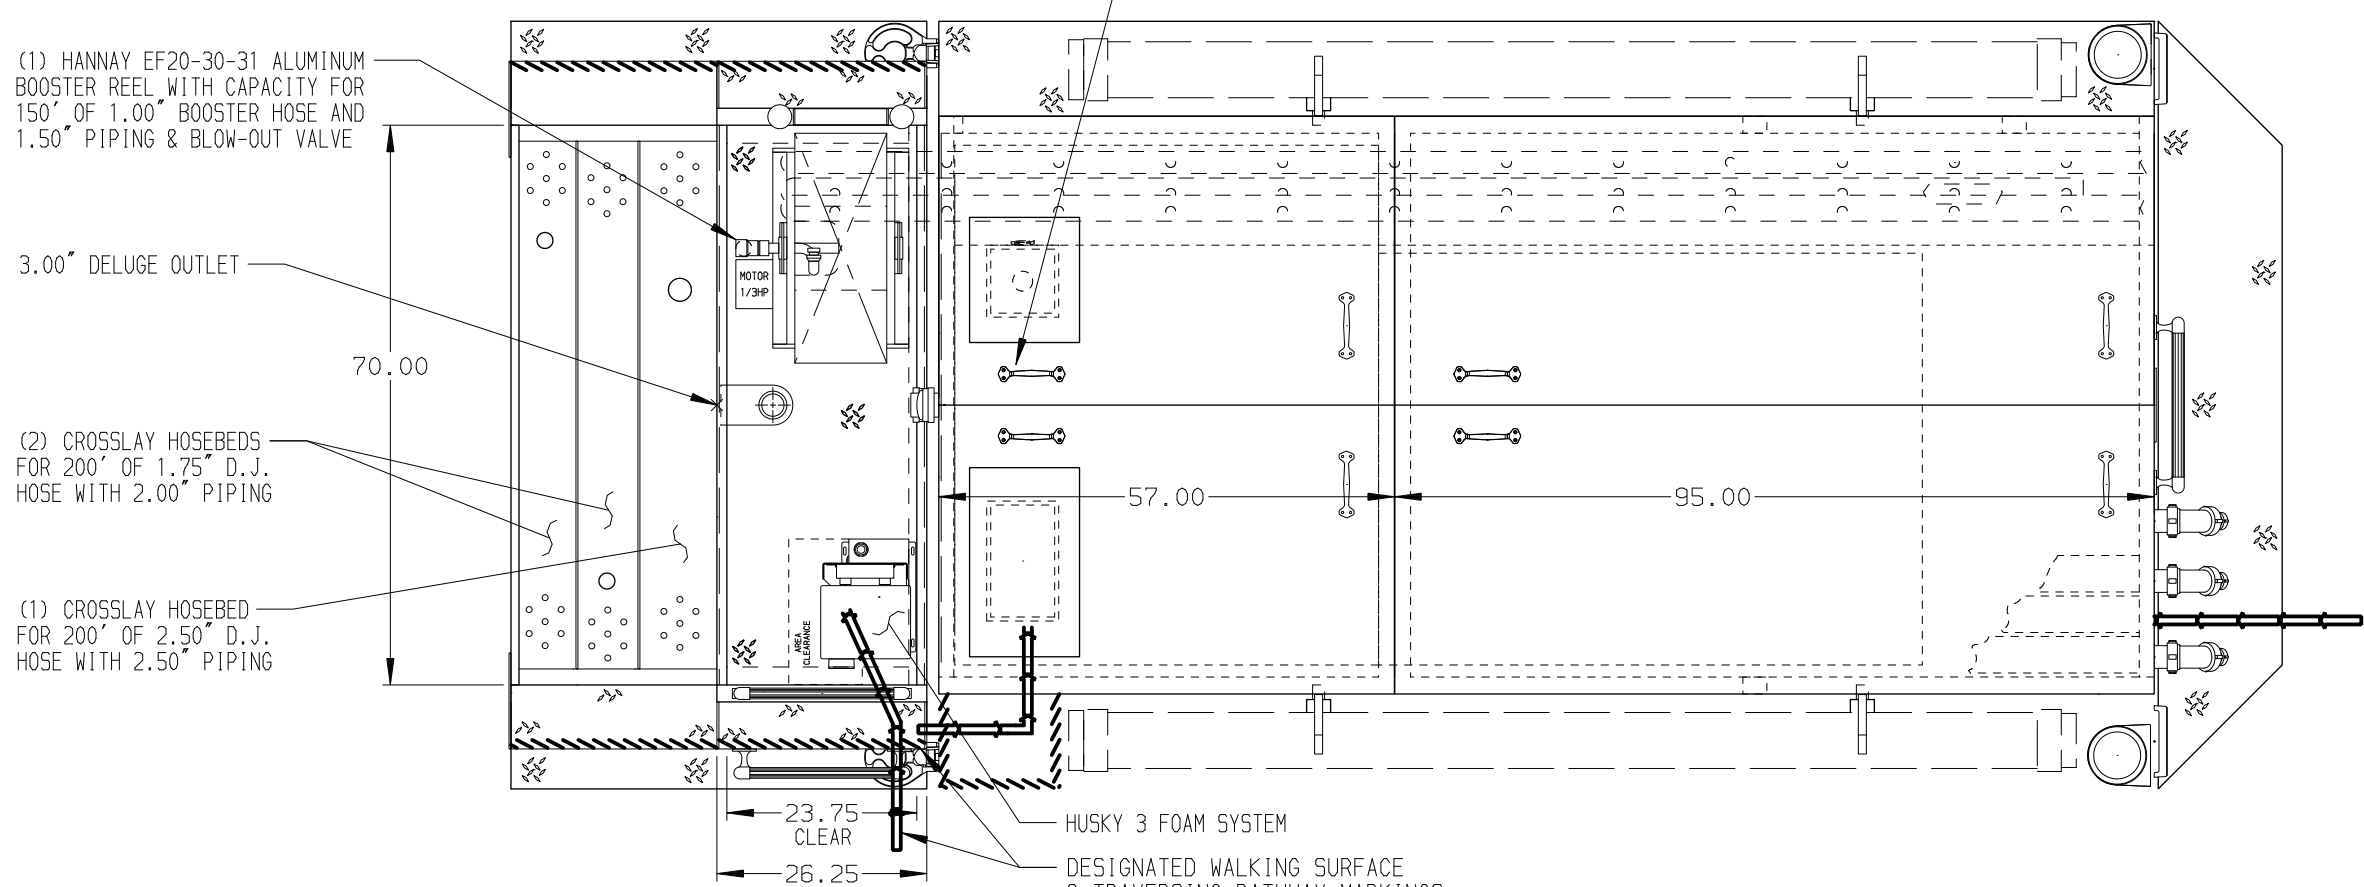
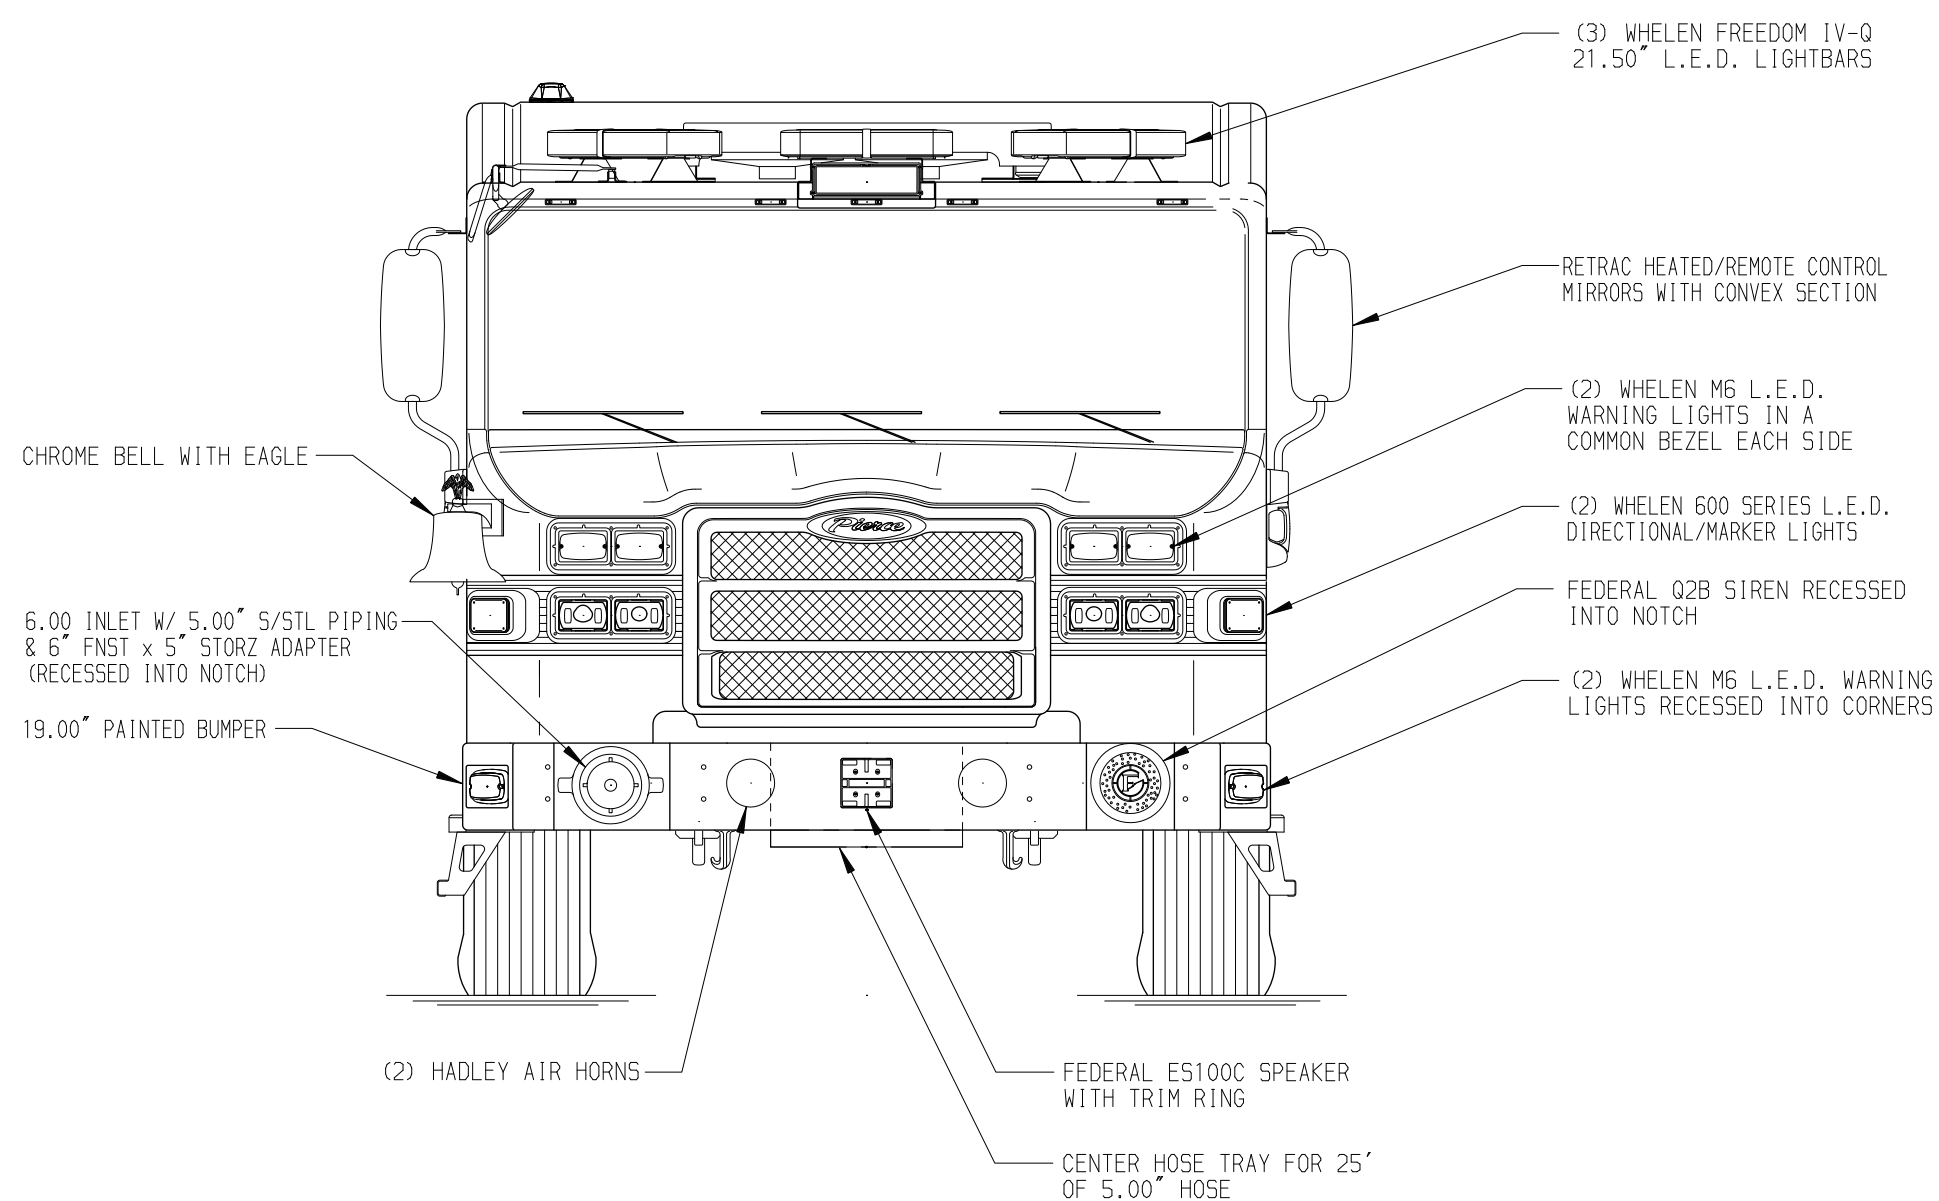
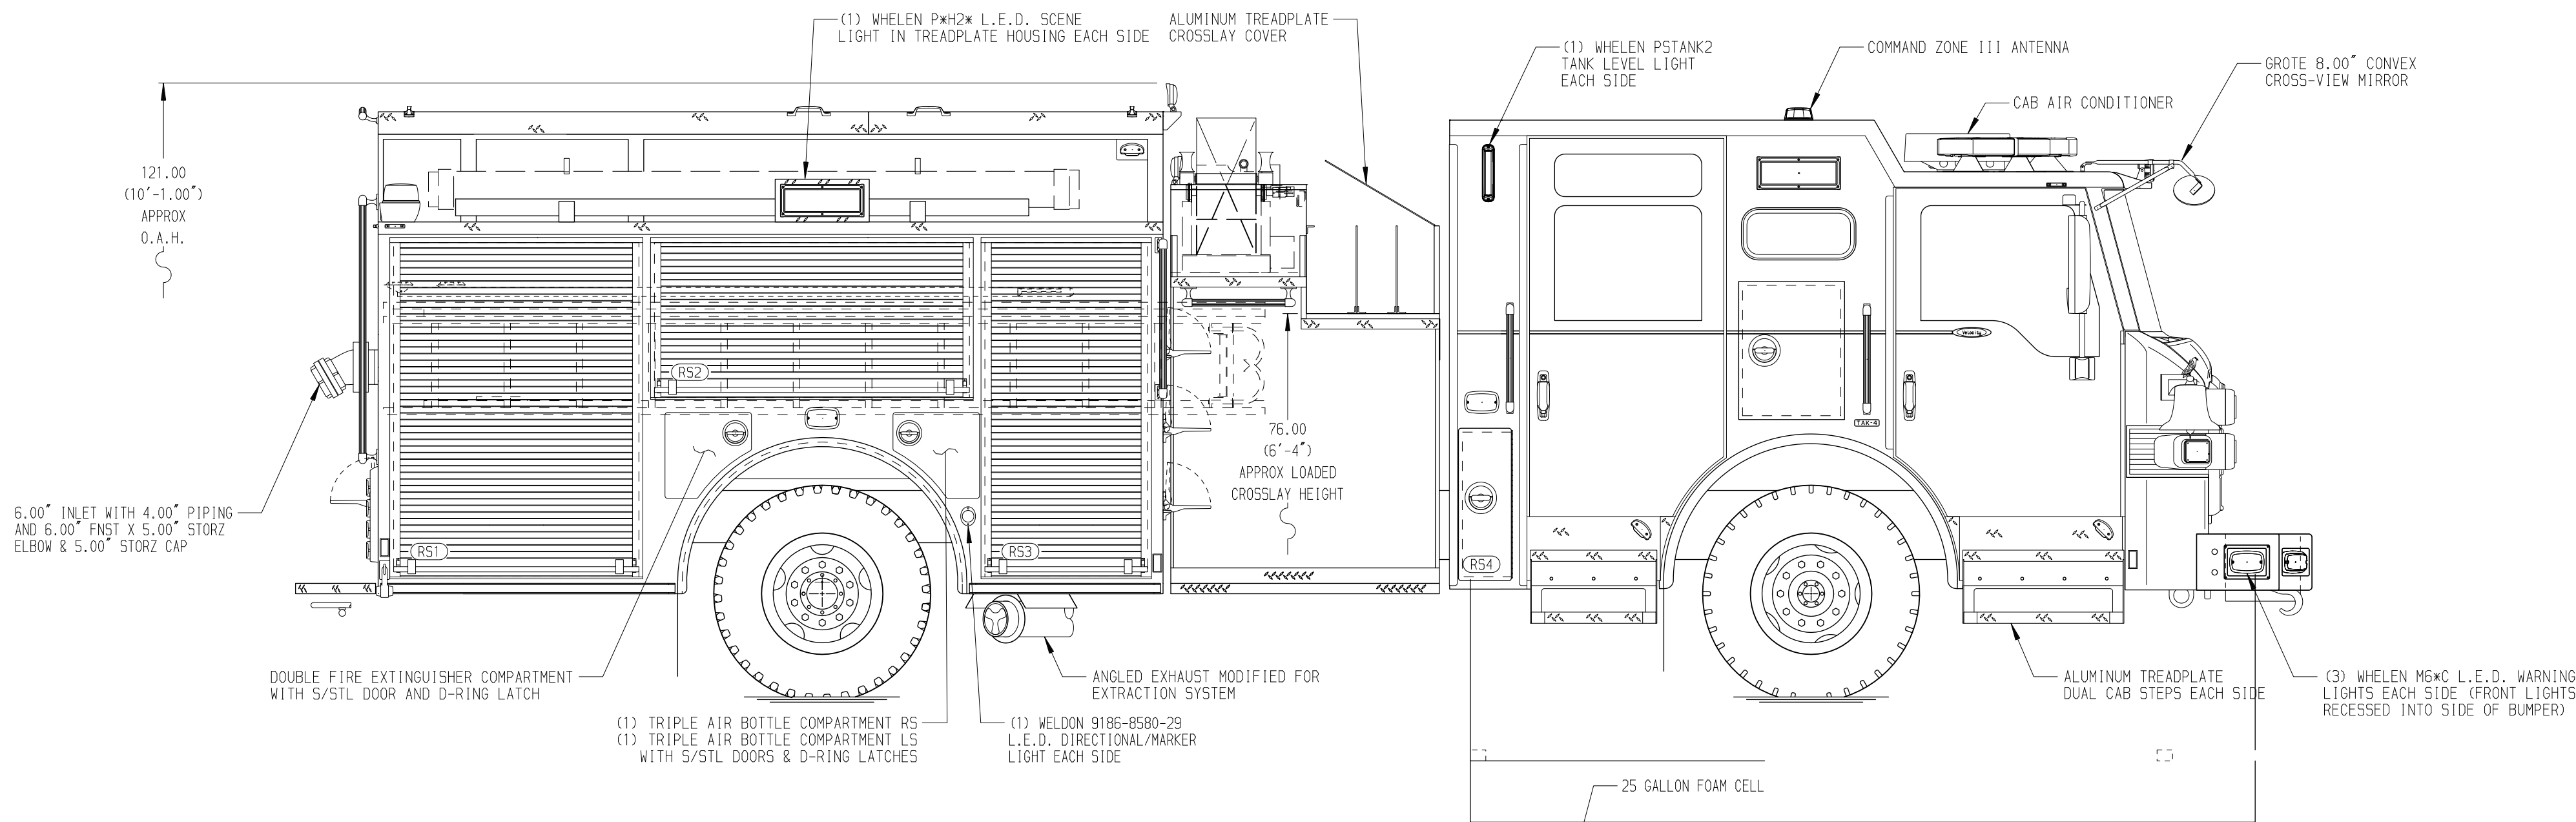


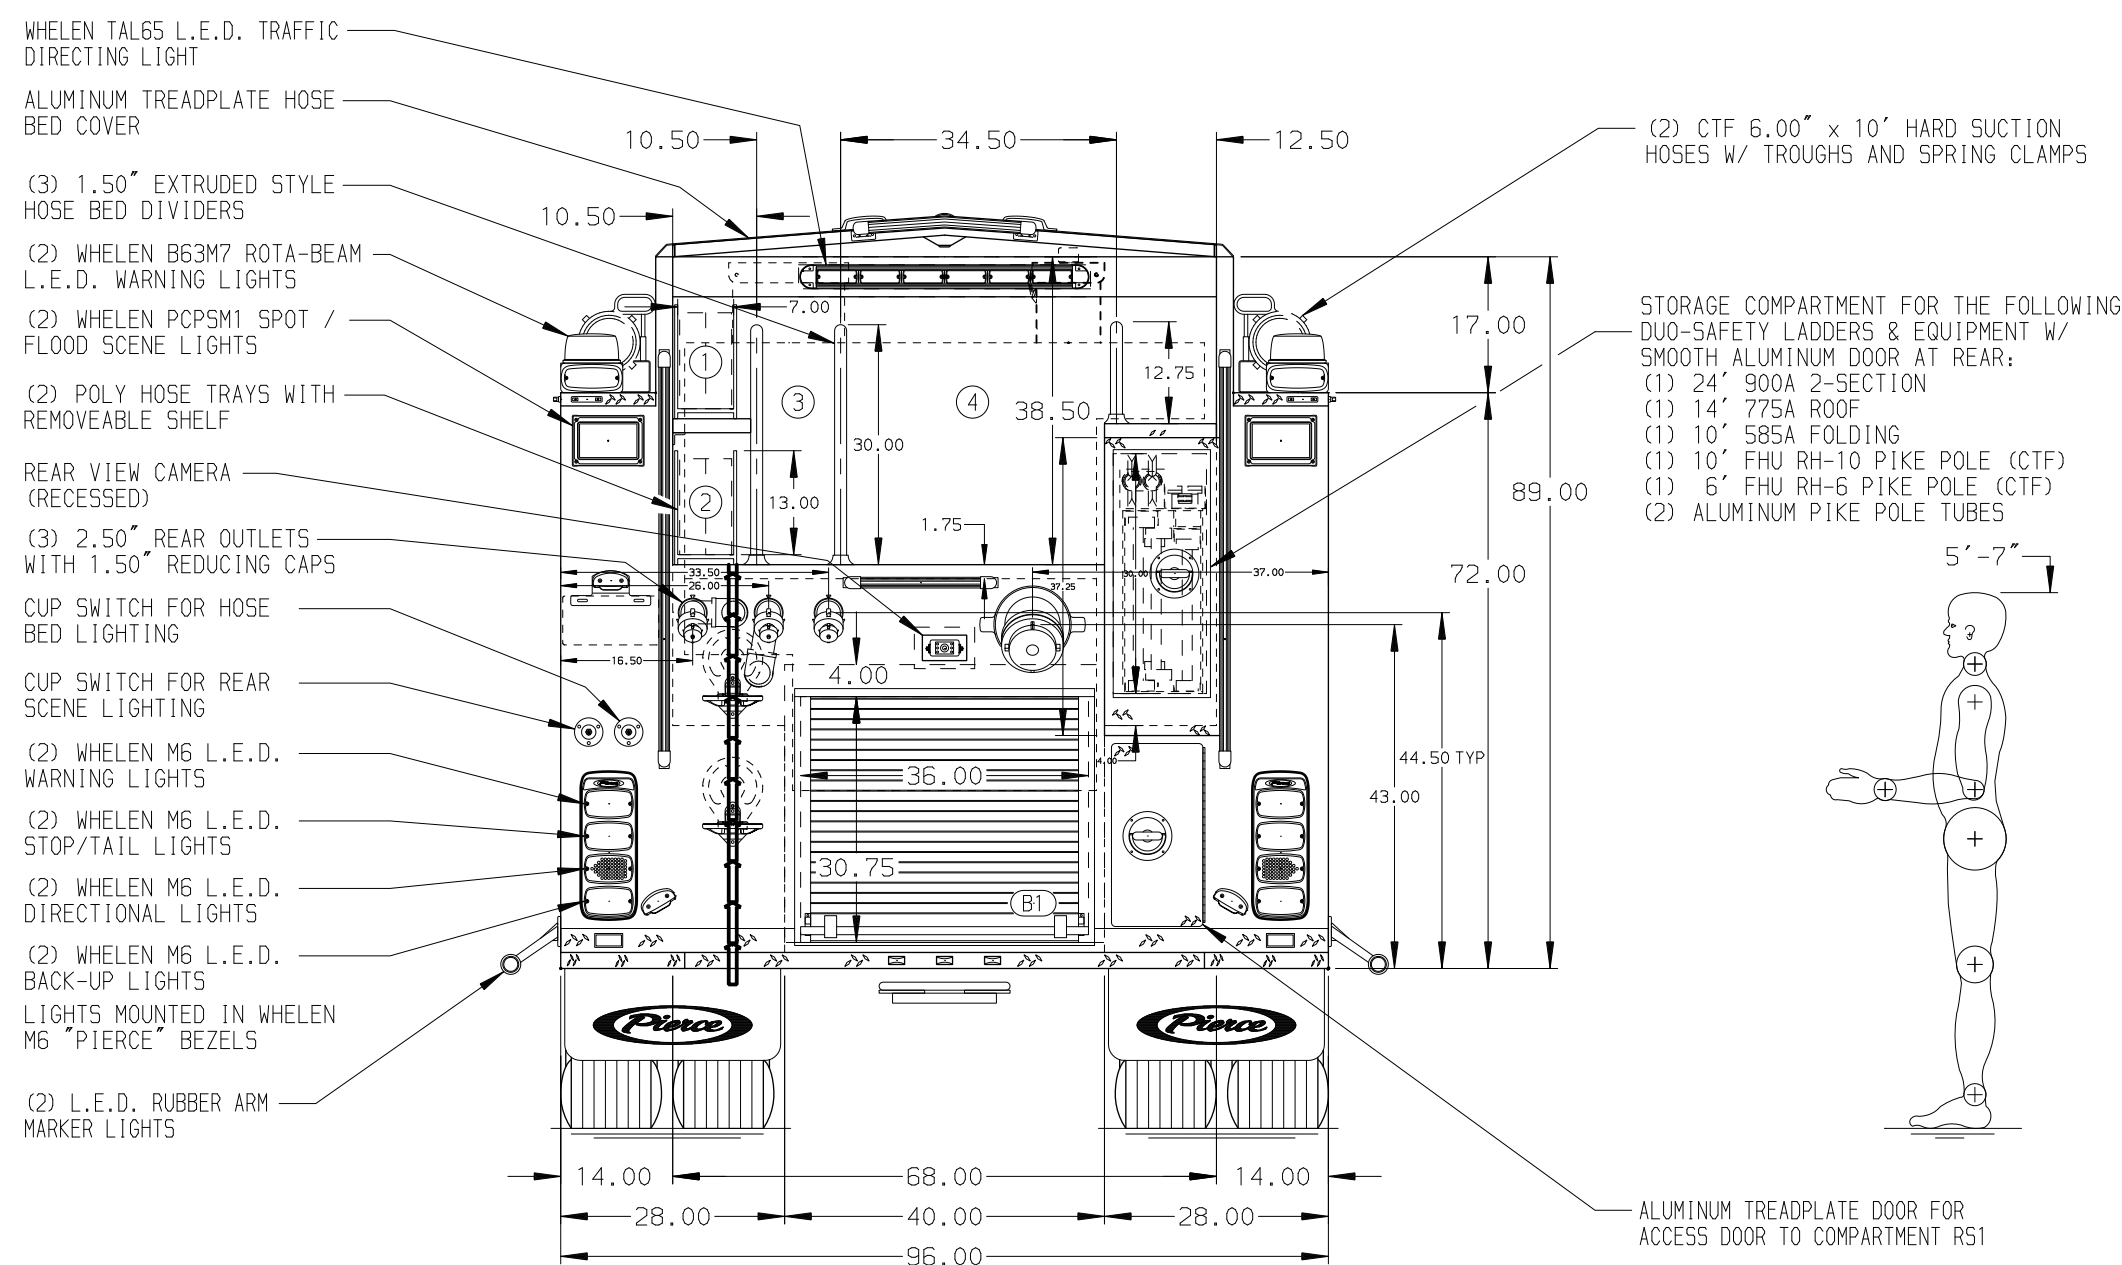

- HOSEBED CAPACITIES
- ① - 250' OF 1.75" D.J. HOSE
 - ② - 250' OF 1.75" D.J. HOSE
 - ③ - 500' OF 2.50" D.J. HOSE
 - ④ -1000' OF 5.00" L.D. HOSE

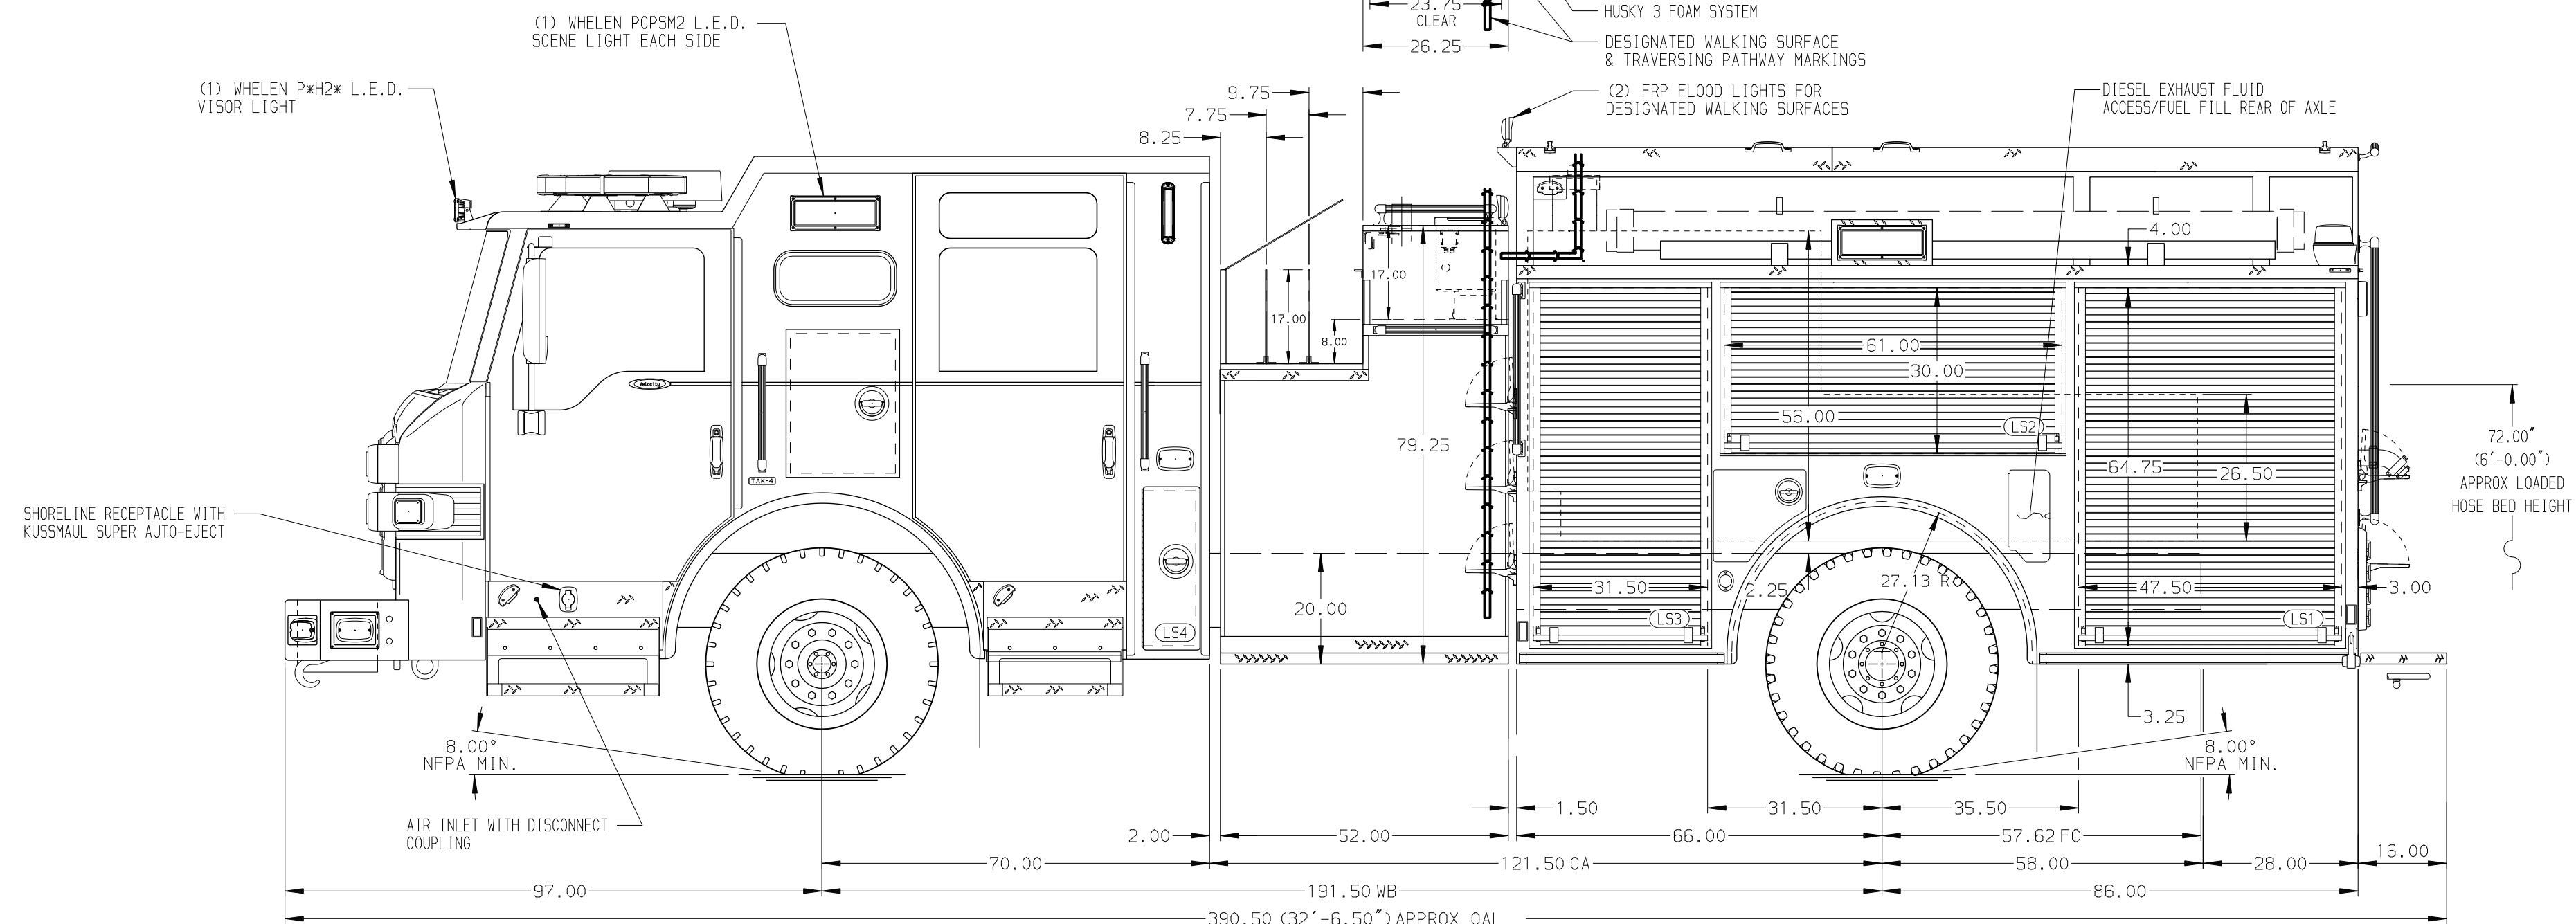

STAINLESS STEEL BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER MOUNTED BEHIND DRIVER'S SEAT
2. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED ALL BODY COMPARTMENTS
5. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENTS LS1, LS3, RS1, & RS3
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT LS1
7. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT RS2
8. TWO ZIMMATIC SCBA HOLDER BRACKETS LOCATED IN LS2 - ONE IN LS3, RS1, & RS3
9. THREE ADJUSTABLE HANGER POSTS IN COMPARTMENT LS1
10. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1

11. ONE VERTICAL PARTITION IN COMPARTMENT RS1
12. CUSTOMER TO FURNISH WHEEL CHOCKS AND BRACKETS
13. ALUMINUM PEGBOARD WITH TRACKS ON THE BACK WALL OF COMPARTMENT LS2, LS3, RS1, & RS3
14. ON-SPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT THE REAR
15. AIR INLET WITH DISCONNECT COUPLING LOCATED FORWARD IN DRIVER'S STEP WELL
16. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON LS PUMP PANEL
17. ONE FLOOR MOUNTED SLIDE OUT TRAY WITH SPC HEIGHT SIDES IN COMPARTMENT B1

REV	DATE	BY	CH	CHASSIS DATA
				MAKE
				PIERCE
				MODEL
				VELOCITY
				FR 7010

TITLE	FOR	DWG NO.
1500-D-775P, 750G WATER, 25G FOAM, 152" FH-FDLR (3) X LAYS, DELUGE, HUSKY 3, LDDRS BTW TANK & S/SHEET	PORTLAND FIRE DEPARTMENT, ME PORTLAND, MAINE	34142AD

JOB NO.	34142
SCALE	1:24
DATE	
DRAWN BY	GVH
CHECKED BY	CKN
SHEET SIZE	D
SHEET NO.	1 OF 1