PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
MUX

CHASSIS

AXLE, FRONT, CUSTOM
18,000 Lb Dana Axle

AXLE, REAR
27,000 Lb Dana Axle

ENGINE
400 HP Cummins L9 Engine

TRANSMISSION
ALlison 6th Gen, 3000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
750 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL CAPACITY
Foam Cell Not Required

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
152" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
152" Lap Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Side Mount

PUMP
1500 GPM Hale Qmax

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

FOAM SYSTEM
Foam System Not Required

SAFETY

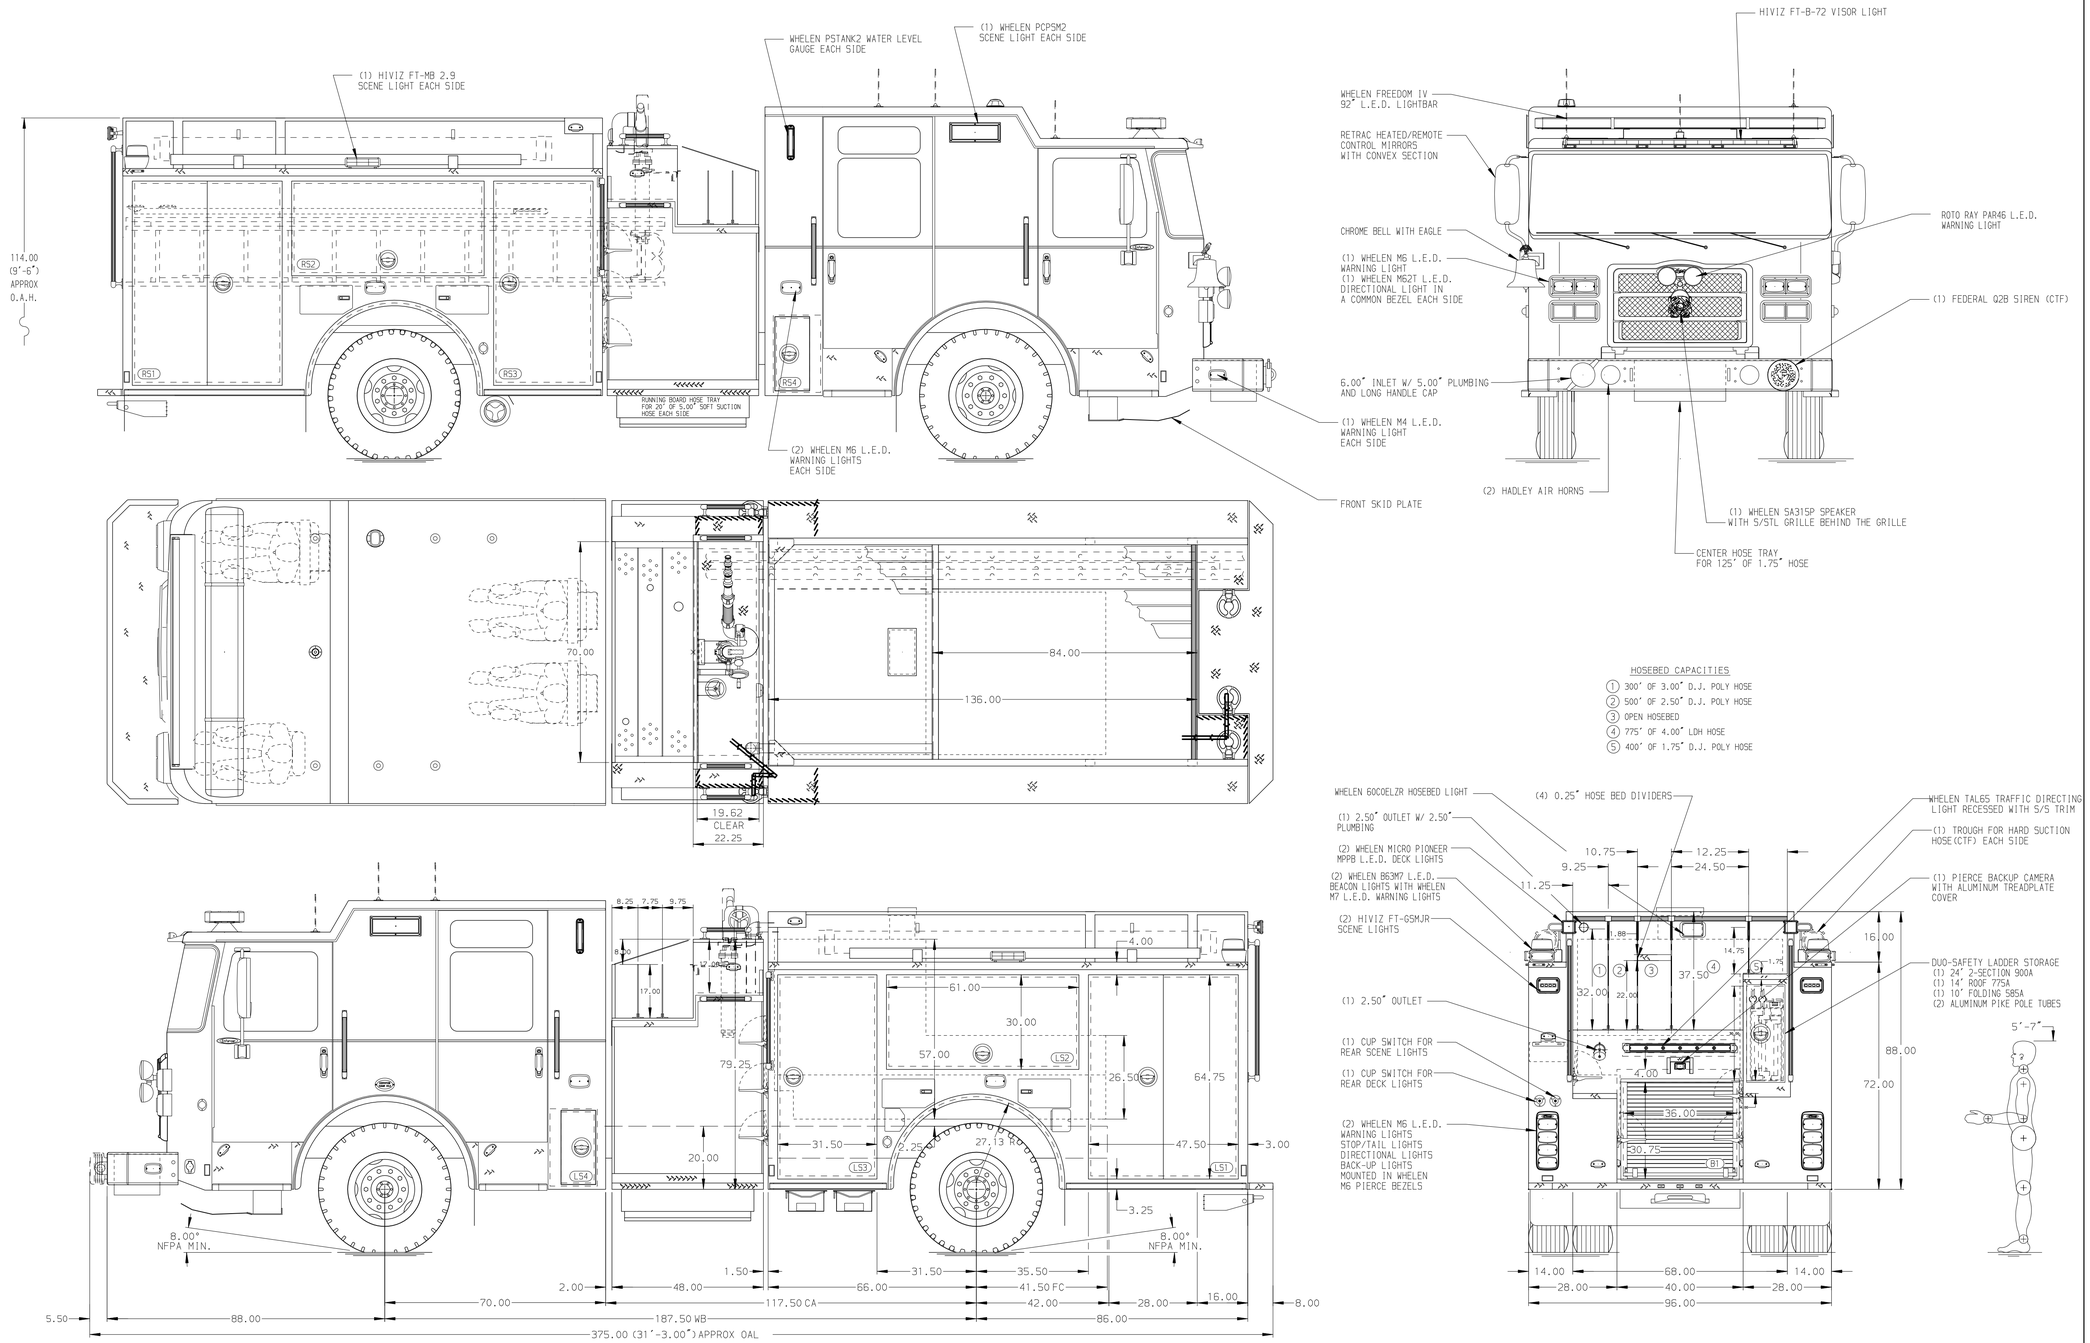

MAXIMUM O.A.H. 114.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE FRONT CAB CORNER
3. XANTREX FREEDOM INVERTER AND BATTERY CHARGER LOCATED PER ORDER
4. THREE ADJUSTABLE SHELVES LOCATED PER ORDER
5. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
6. TWO ADJUSTABLE SLIDE-OUT TRAYS LOCATED PER ORDER
7. ONE SWING-OUT ALUMINUM TOOLBOARD LOCATED PER ORDER
8. ONE VERTICAL PARTITION LOCATED PER ORDER
9. ALUMINUM PEGBOARD ON THE BACKWALL LOCATED PER ORDER
10. BATTERY CHARGER INDICATOR LOCATED ON THE DRIVER'S SEAT RISER
11. PAC TRAC INSTALLED ON THE BACKWALL LOCATED PER ORDER

REV	DATE	BY	CH
7	06OCT25	LST	SJS
6	17JUL25	LST	SJS
5	16JUN25	LST	SJS
4	10JUN25	LST	SJS

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing –
FOR: Merrimack Fire Department –
DWG NO.: 40930AD

JOB NO. 40930
SCALE 1:24
DATE
DRAWN BY LST 07APR25
CHECKED BY MMF 8APR25
SHEET SIZE D
SHEET NO. 1 OF 1

View File Created 06-OCT-2025 11:27:11