PUMPER

BODY
Long Stainless Steel 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
Hard Wired

CHASSIS

AXLE, FRONT, CUSTOM
20,000 Lb Dana Axle

AXLE, REAR
27,000 Lb Dana Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
ALLison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
780 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL CAPACITY
30 Gallon Foam Cell

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
161" Rollup Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE
161" Rollup 3/4 Height Front & Rear, FDLER

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

FOAM SYSTEM
Husky 3 Single Agent Foam System

SAFETY

Side Roll and Frontal Impact Protection

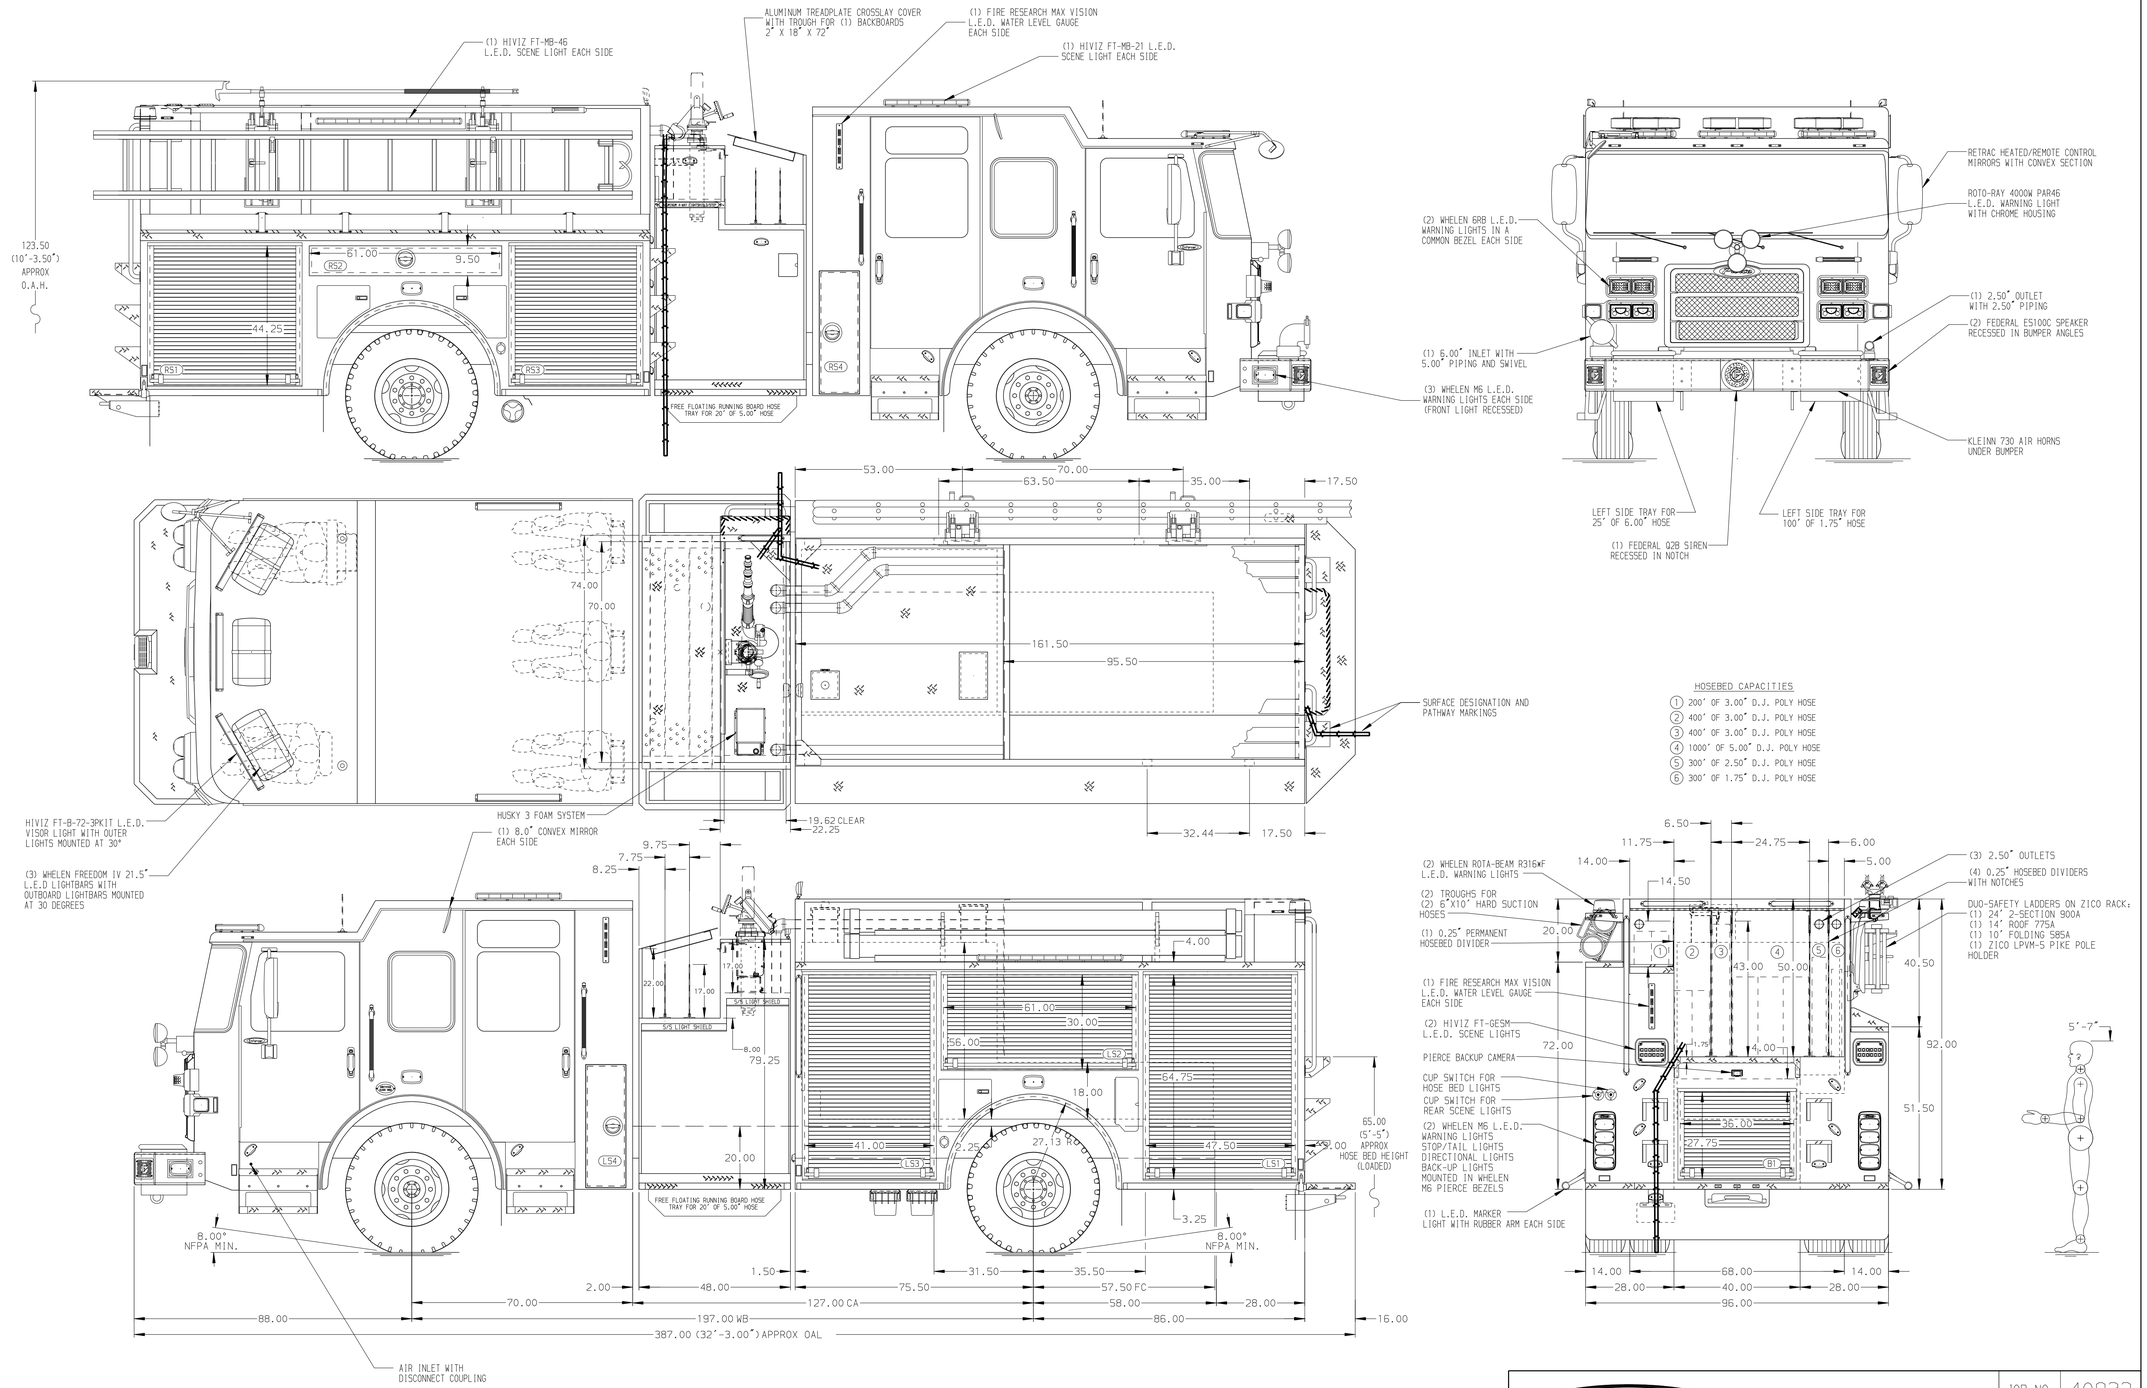

HOSEBED CAPACITIES

1. 200' OF 3.00" D.J. POLY HOSE
2. 400' OF 3.00" D.J. POLY HOSE
3. 400' OF 3.00" D.J. POLY HOSE
4. 1000' OF 5.00" D.J. POLY HOSE
5. 300' OF 2.50" D.J. POLY HOSE
6. 300' OF 1.75" D.J. POLY HOSE

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. 20A 120V SHORELINE LOCATED ON BRACKET NEXT TO DRIVER'S SEAT RISER
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED PER ORDER
5. FIVE FULL WIDTH/DEPTH ADJUSTABLE SHELVES IN COMPARTMENTS PER ORDER
6. ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENT PER ORDER
7. ONE FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENT PER ORDER
8. TWO SLIDE-OUT TOOLBOARDS IN COMPARTMENTS PER ORDER
9. TRANSVERSE PARTITIONS IN COMPARTMENTS B1/RS1 AND B1/LS1

REV	DATE	BY	CH
4	04NOV25	BTH	DTJ
3	25AUG25	BTH	DTJ
2	29JUL25	BTH	DTJ
1	25JUL25	BTH	DTJ

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing –
FOR: St Paul Blvd Fire District –
DWG NO.: 40932AD

JOB NO. 40932
SCALE 1:24
DATE
DRAWN BY BTH 29MAY25
CHECKED BY MMF 30MAY25
SHEET SIZE D
SHEET NO. 1 OF 1

View File Created 05-NOV-2025 09:23:24