

PUMPER, PUC
BODY
 Long, Aluminum, 2nd Gen Pumper
CHASSIS
 Enforcer Chassis
ELECTRICAL SYSTEM
 MUX

CHASSIS
AXLE, FRONT, CUSTOM
 19,500 Lb TAK-4 Axle
AXLE, REAR
 27,000 Lb Meritor Axle
ENGINE
 455 HP Cummins X12 Engine
TRANSMISSION
 Allison 6th Gen, 4000 EVS P
BUMPER
 19" Extended Painted Steel Underslung
CAB
 7010 Enforcer Cab

BODY
TOTAL TANK CAPACITY
 770 Gallon Poly Tank
WATER CAPACITY
 750 Gallons of Water
FOAM CELL CAPACITY
 20 Gallon Foam Cell
COMPT, PUMPER, REAR
 37.75" FF RoLup Rear Compt
COMPT, PUMPER, LEFT SIDE
 161" Lop, Full Height Front & Rear, FDLER
COMPT, PUMPER, RIGHT SIDE
 161" Lop, Full Height Front & Rear, FDLER

FIRE SUPPRESSION
PUMPHOUSE
 45" Top Mount W/ 19" Walkway
PUMP
 2000 GPM DarLey PSM
CROSSLAYS, 1.50"
CROSSLAY, 2.50"
SPEEDLAYS
 (2) 1.50", W/ Poly Tray Std. Cap.
GENERATOR
 Generator Not Required
FOAM SYSTEM
 Husky 3 Single Agent Foam System


SAFETY

Side Roll and Frontal Impact Protection

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE
 AND ARE SUBJECT TO MINOR DEVIATIONS
 AS MAY OCCUR OR BE NECESSARY IN
 CONSTRUCTION.
 MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING TERMINATING IN THE UNDERSLUNG BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED DRIVER'S SIDE CAB SIDE
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED BEHIND DRIVER'S SIDE CAB DOOR
- SIX ADJUSTABLE SHELVES LOCATED PER ORDER
- THREE FLOOR MOUNTED TRAYS LOCATED PER ORDER
- ONE THREE DRAWER CTECH CABINET ASSEMBLY LOCATED PER ORDER
- ONE EQUIPMENT STORAGE MODULE, WITH ANGLED FRONT, AND LIFT UP DOOR LOCATED PER ORDER
- MIC AND SPEAKER COMPARTMENT LOCATED AT THE PUMP PANEL

11. J HOOKS WITH TRACK LOCATED PER ORDER

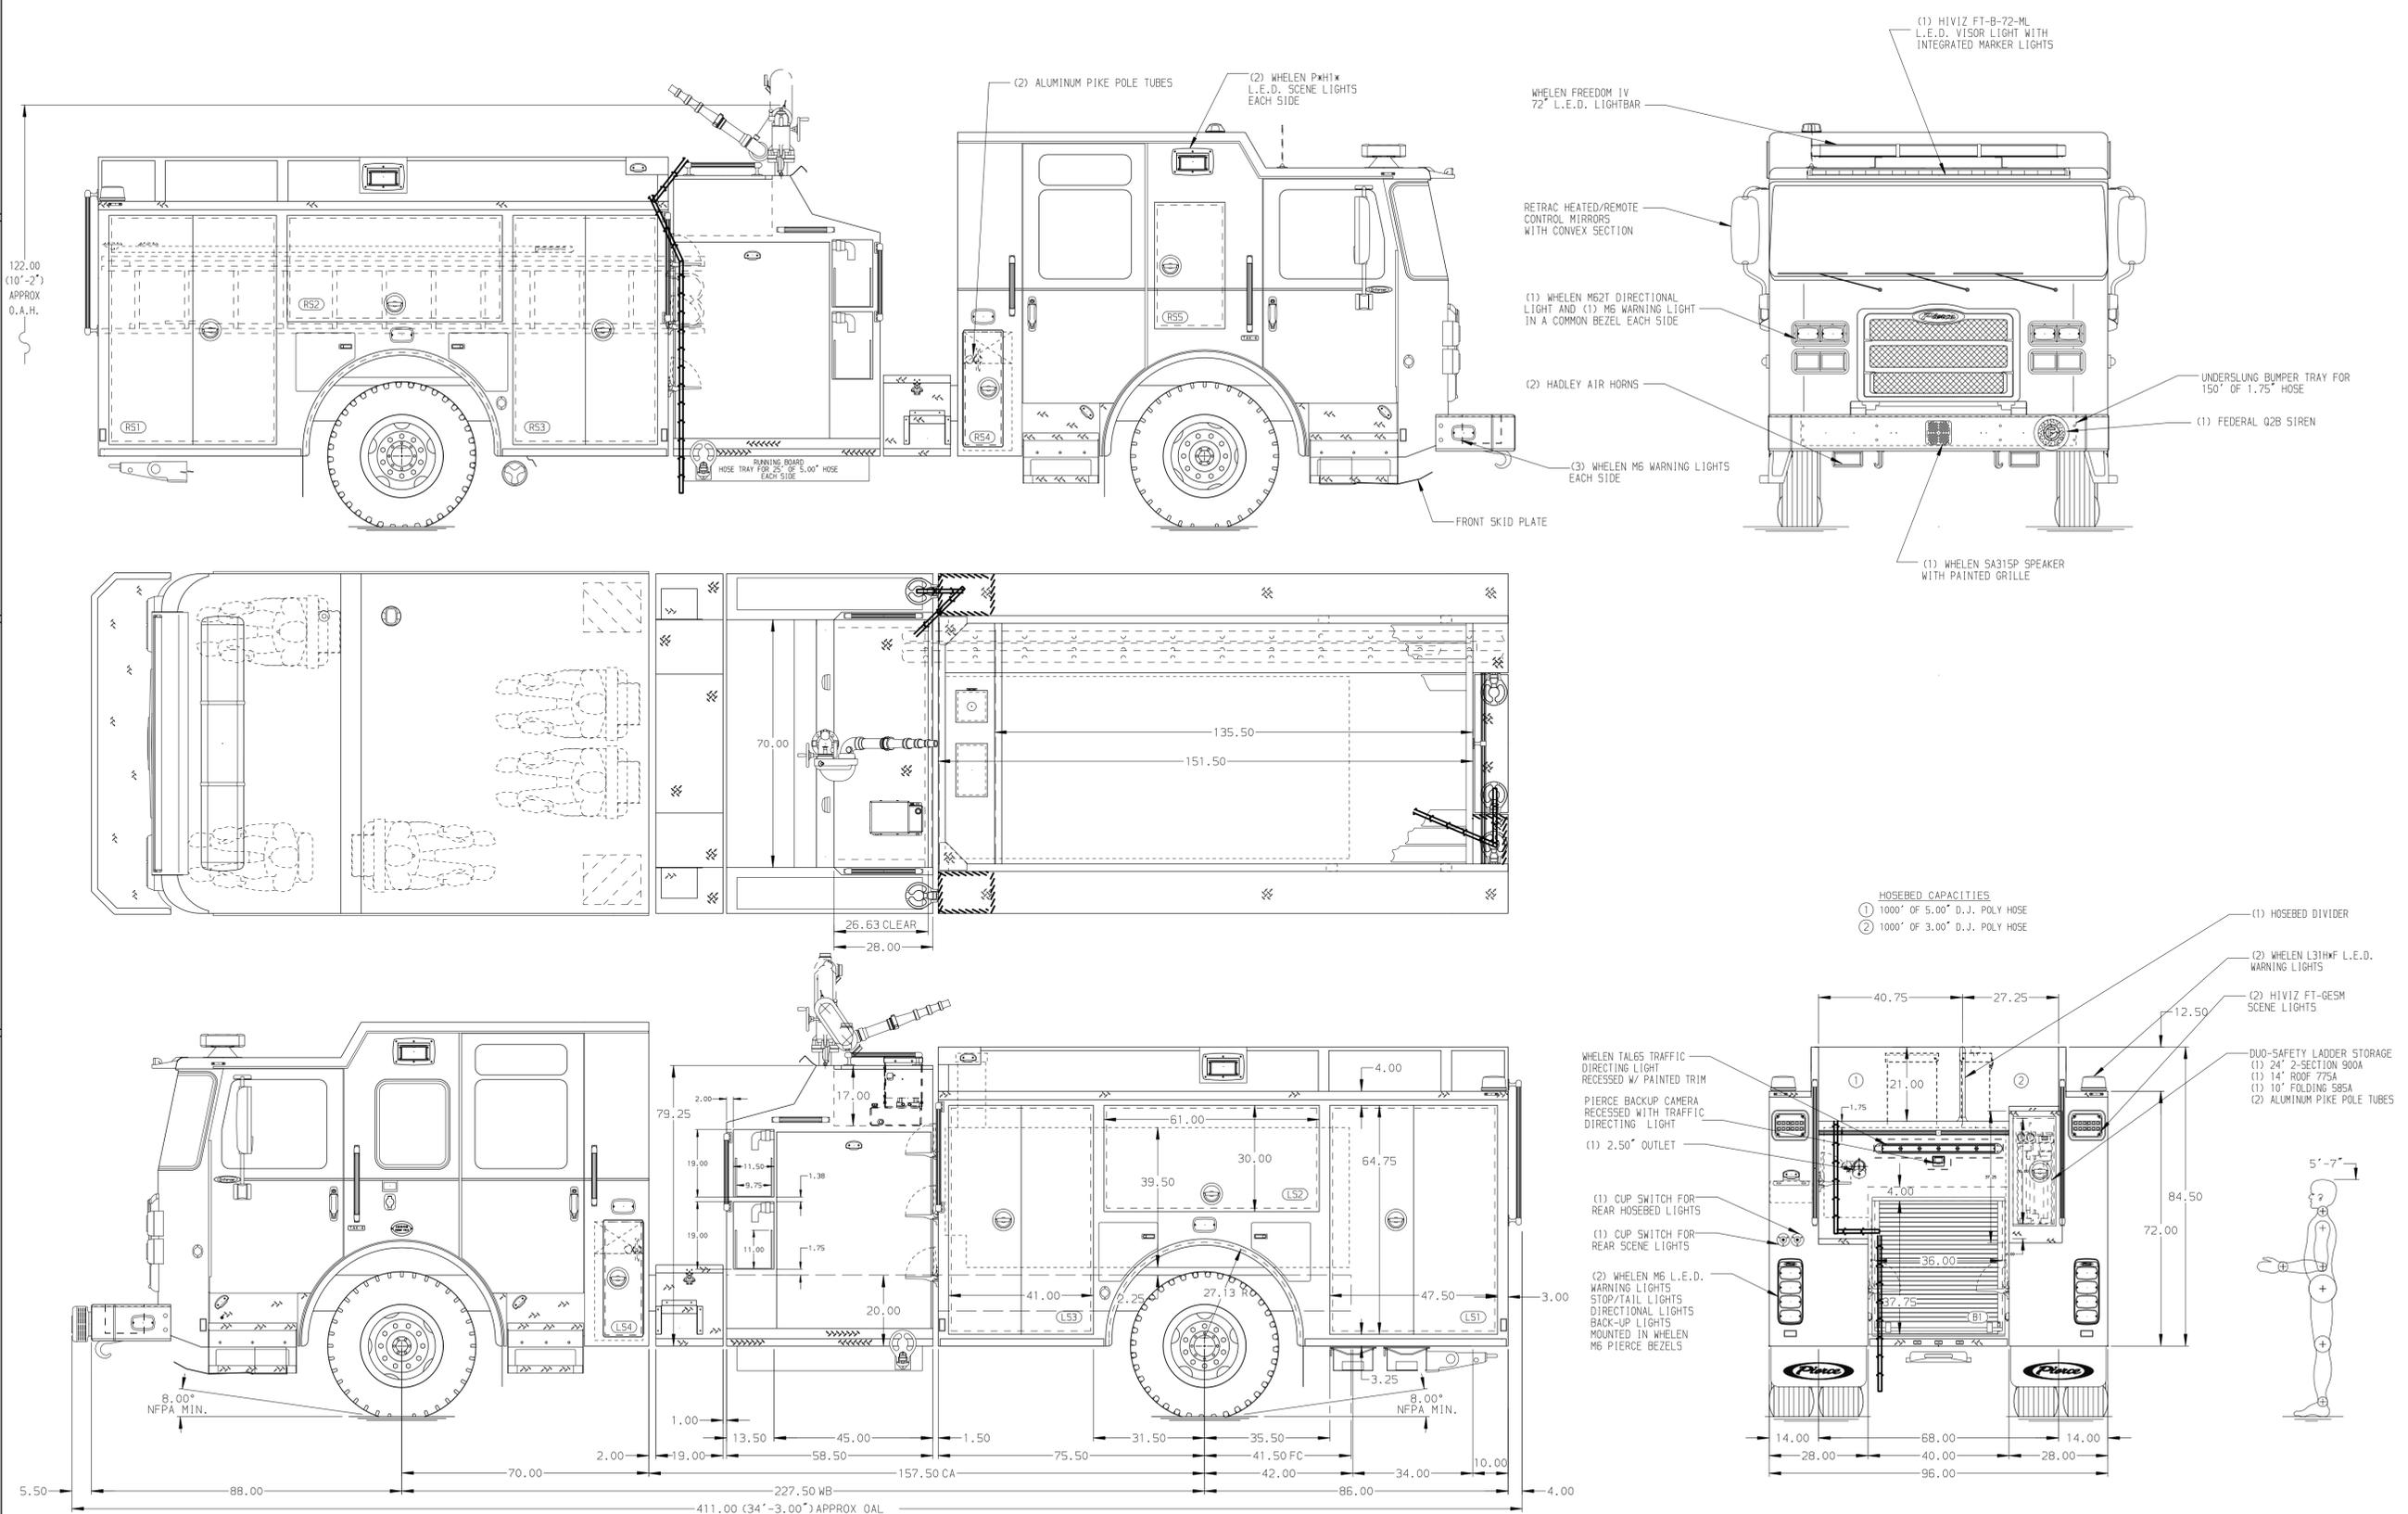

		JOB NO.	41087
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	LST 27MAY25
FOR	City of Chillicothe	CHECKED BY	MMF 28MAY25
DWG NO.	41087AD	SHEET SIZE	SHEET NO.
		D	1 OF 1

REV	DATE	BY	CH	ENFORCER
1	15AUG25	LST	GKH	PIERCE
2	17JUL25	LST	GKH	PIERCE