

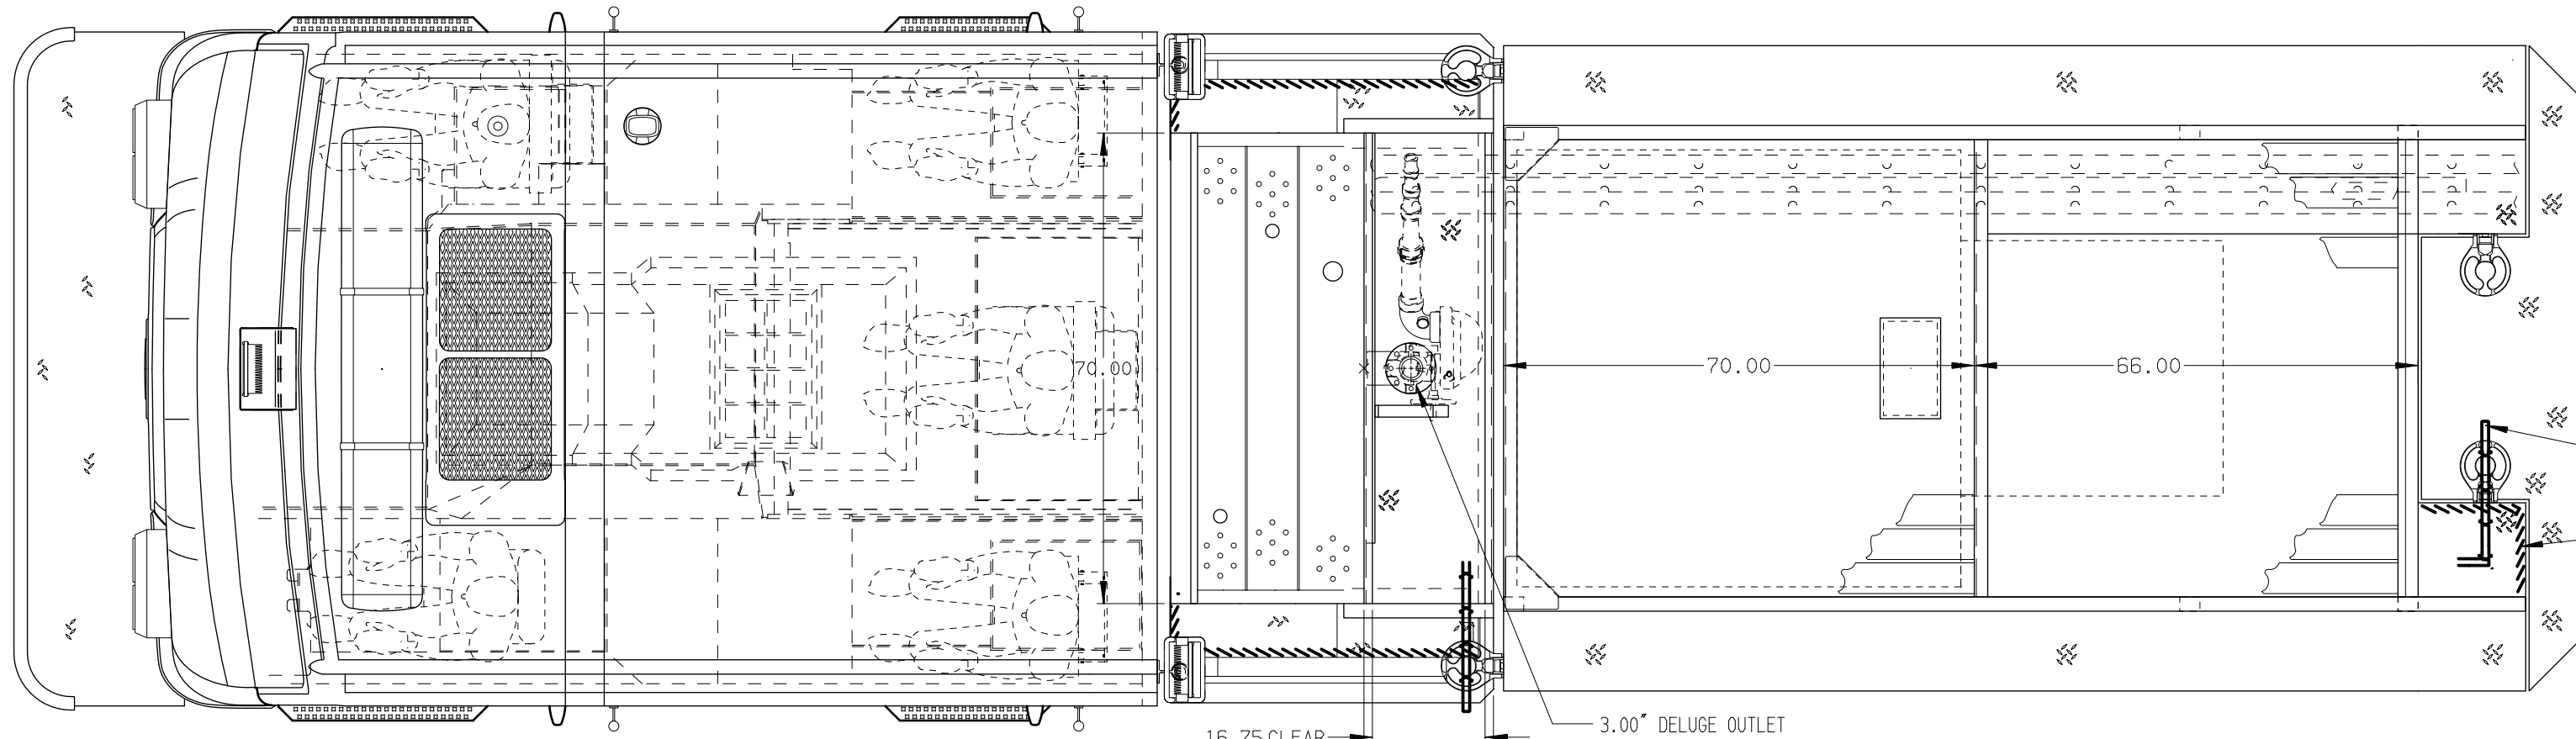


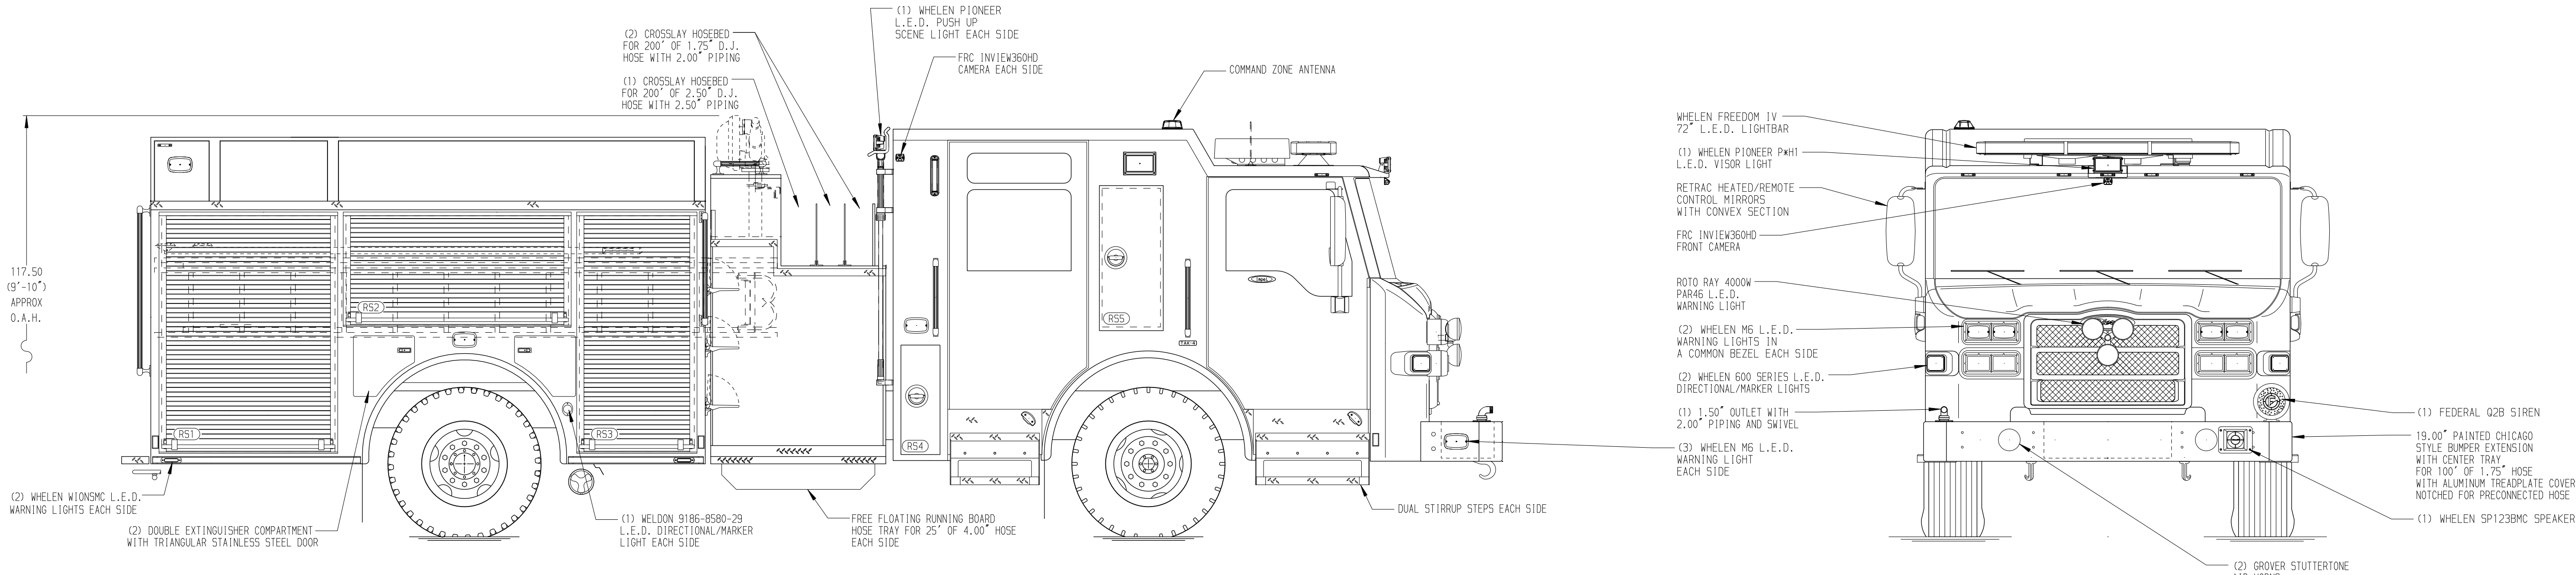

- HOSEBED CAPACITIES
- ① 200' OF 1.75" D.J. POLY HOSE
 - ② 600' OF 2.50" D.J. POLY HOSE
 - ③ 1000' OF 4.00" L.D.H. SUPPLY HOSE

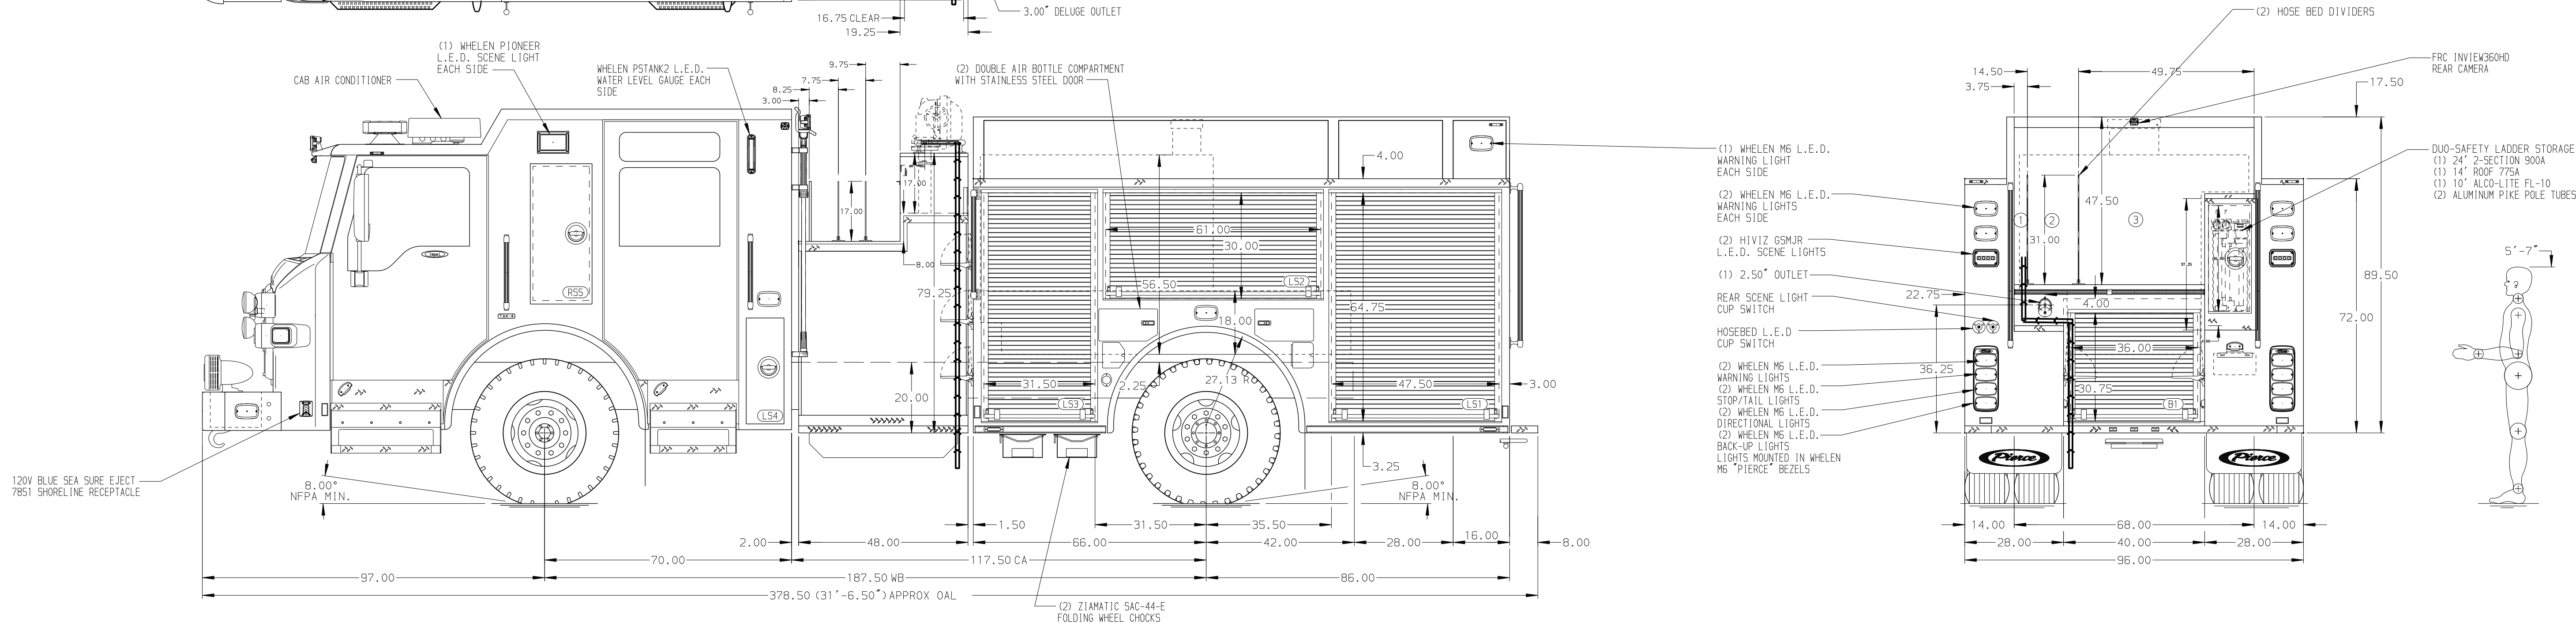

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- AIR INLET/OUTLET WITH DISCONNECT COUPLING ON DRIVER SIDE PUMP PANEL
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER SEAT RISER WITH BRACKET
- ONE 3' DUO SAFETY PIKE POLE W/D-HANDLE PIKE POLE SHIPPED LOOSE

CUSTOMER APPROVAL					 MANUFACTURING INC.			JOB NO.	37170
APPROVED BY: _____								SCALE	1:24
DATE: _____									
				CHASSIS DATA	TITLE	1500-D-750P, 152" BODY PUMPER, DELUGE LADDERS BETWEEN TANK & S.SHT, (3) CROSSLAYS		DRAWN BY	28JAN22
				MAKE	FOR	EAST BANK CONSOLIDATED FIRE DEPARTMENT		CHECKED BY	01FEB22
				PIERCE		JEFFERSON, LOUISIANA		KBO	
	-	-	-	MODEL	DWG NO.	37170AD-SH1		SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	IMPEL FR				D	1 OF 2