

# PUMPER BODY

Long Aluminum 2nd Gen Pumper

## CHASSIS

EnForcer Chassis

## ELECTRICAL SYSTEM

MUX

## CHASSIS AXLE, FRONT, CUSTOM

20,000 Lb Dana Axle

## AXLE, REAR

27,000 Lb Dana Axle

## ENGINE

510 HP Paccar MX13 Engine

## TRANSMISSION

Allison 6th Gen, 4500 EVS P

## BUMPER

22" Extended Painted Steel

## CAB

7000 Enforcer Cab

## BODY

### TOTAL TANK CAPACITY

750 Gallon New York Style Poly Tank

### WATER CAPACITY

750 Gallons of Water

### FOAM CELL CAPACITY

Foam Cell Not Required

### COMPT, PUMPER, REAR

30.75" FF Lap Rear Compt

### COMPT, PUMPER, LEFT SIDE

161" Lap Full Height Front & Rear FDLER

### COMPT, PUMPER, RIGHT SIDE

161" Lap Low FDLER

## FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

### PUMP

2000 GPM Waterous CSU

### CROSSLAYS, 1.50"

1.50" Crosslays Not Required

### CROSSLAYS, 2.50"

2.50" Crosslay Not Required

### SPEEDLAYS

Speedlays Not Required

### GENERATOR

Generator Not Required

### FOAM SYSTEM

Foam System Not Required

## SAFETY



Side Roll and Frontal Impact Protection

### NOTE


DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ON-SPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR OUTLET WITH SHUT-OFF VALVE LOCATED AT DRIVER'S SIDE PUMP PANEL
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. L.E.D. LIGHT STRIP LOCATED ON THE FRONT OF THE HOSEBED
5. BATTERY CHARGER LOCATED PER ORDER
6. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SIDE CAB
7. TRAFFIC CONE MOUNTING TO BE SHIPPED LOOSE
8. SIX FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER ORDER
9. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER

10. ONE SWING-OUT ALUMINUM TOOL BOARD LOCATED PER ORDER
11. ONE CTECH THREE DRAWER INSERT LOCATED PER ORDER
12. PARTITION BETWEEN COMPARTMENTS L51/B1 AND R51/B1
13. TWO ALUMINUM MOUNTING PLATES LOCATED PER ORDER
14. ONE SLIDE-OUT UTILITY TRAY TO BE LOCATED PER ORDER
15. ONE ADJUSTABLE TOOLBOARD TO BE LOCATED PER ORDER
16. THREE 120V RECEPTACLES TO BE LOCATED PER ORDER
16. ONE VERTICAL PARTITION TO BE LOCATED PER ORDER

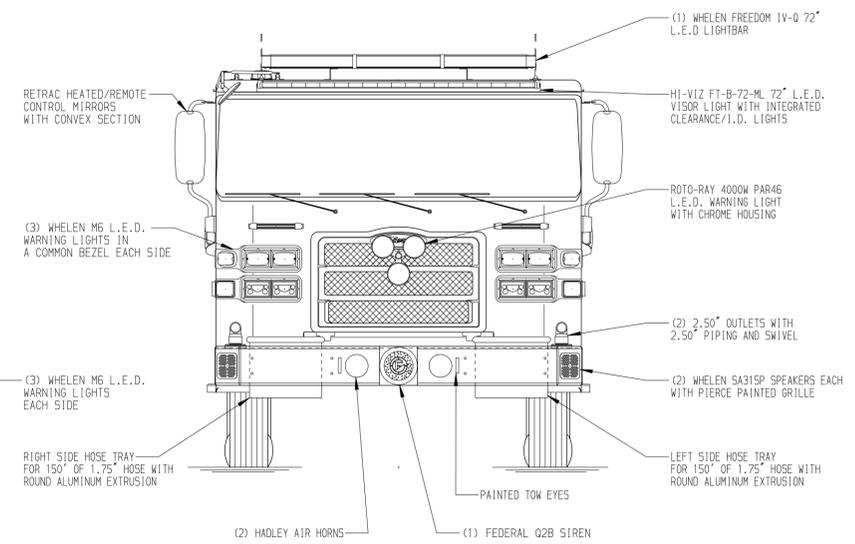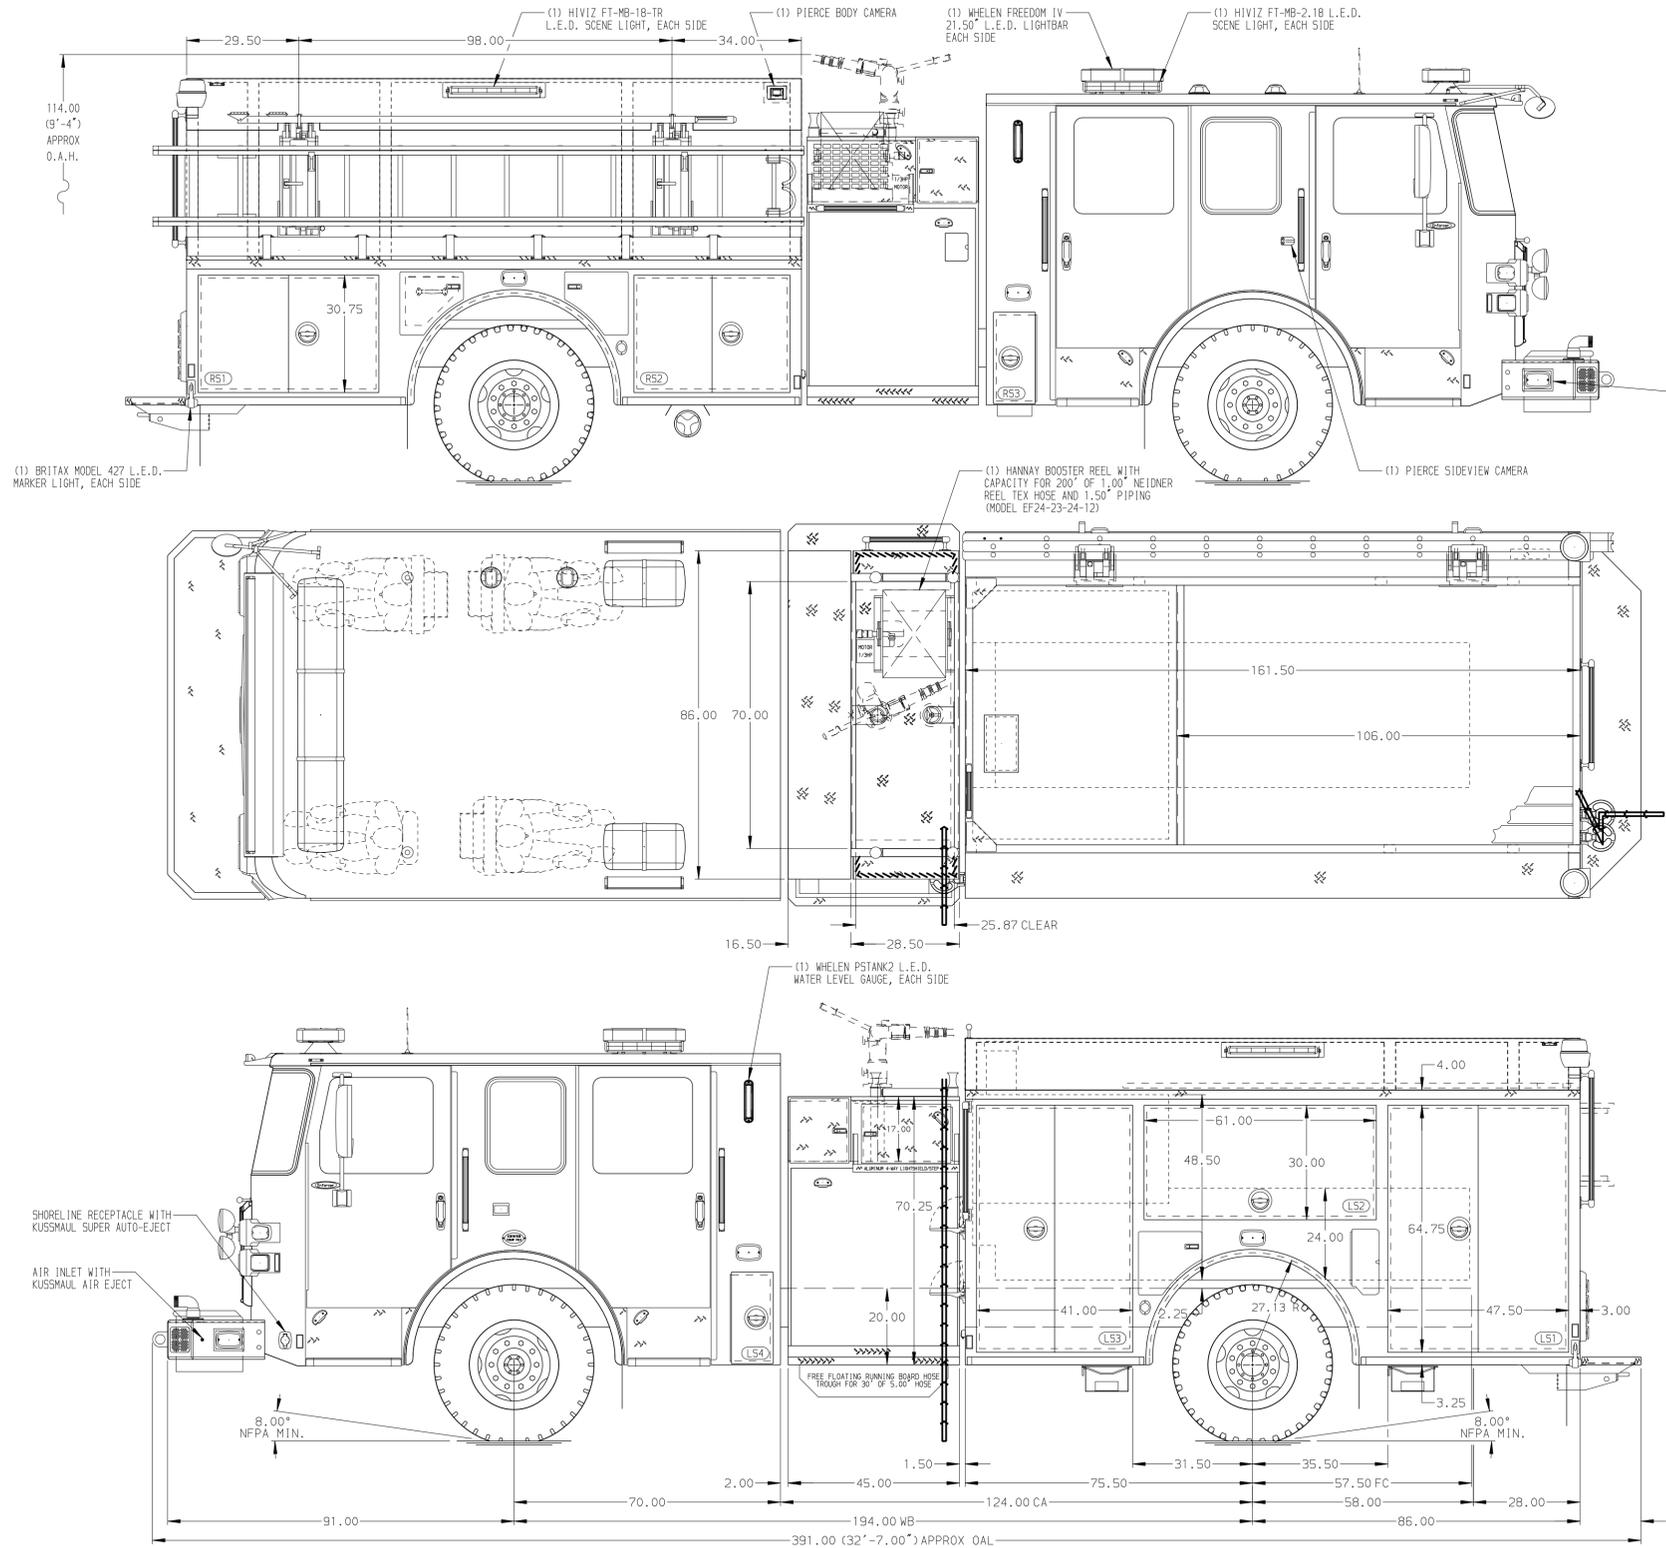

- ### HOSEBED CAPACITIES
- 1 200' OF 1.75" D.J. POLY HOSE
  - 2 200' OF 2.50" D.J. POLY HOSE
  - 3 400' OF 3.00" D.J. POLY HOSE
  - 4 1200' OF 5.00" D.J. POLY HOSE
  - 5 300' OF 3.00" D.J. POLY HOSE
  - 6 200' OF 1.75" D.J. POLY HOSE

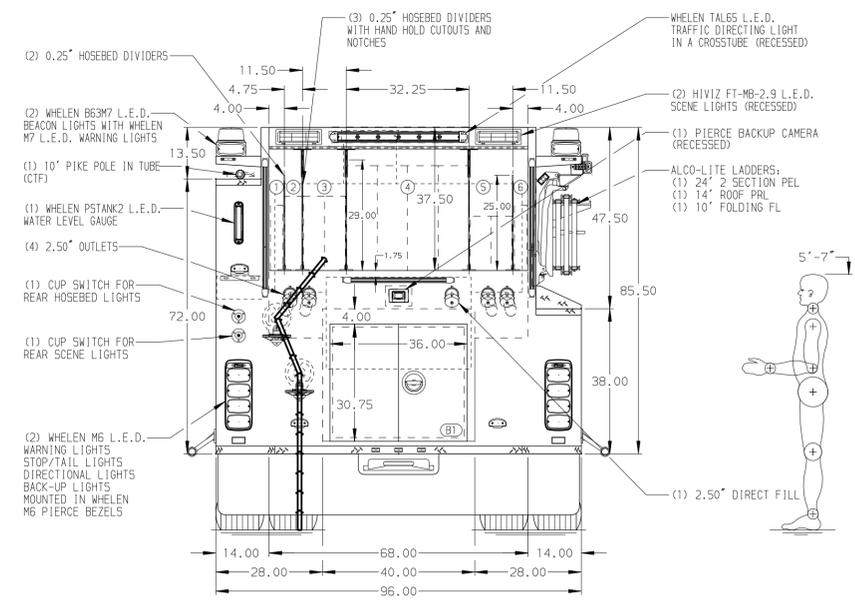

		JOB NO.	41328
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	JDA
FOR	Gaffney Fire Department	CHECKED BY	MMF
DWG NO.	41328AD	SHEET SIZE	SHEET NO.
ENFORCER		D	1 OF 1

CHASSIS DATA			
MAKE	PIERCE		
MODEL			
REV	DATE	BY	CH
01AUG25		KLE	JGO
31JUL25		JDA	JGO