Pumper, PUC

BODY
Pumper, PUC, Aluminum

CHASSIS
Enforcer Chassis, PUC

ELECTRICAL SYSTEM
MUX

CHASSIS

AXLE,FRONT,CUSTOM
22,800 Lb D TAK-4 Axle

AXLE,REAR
27,000 Lb Meritor Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
19" Steel Painted

CAB
7010 Enforcer Cab, PUC

BODY

TOTAL TANK CAPACITY
780 Gallon Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL
30 Gallon Foam Cell #1

COMPT,PUMPER,REAR
33.50" FF Rollup Rear Compt w/Tailboard, PUC

COMPT,PUMPER,LEFT SIDE
189" Rollup Full Height & Depth Front & Rear, PUC

COMPT,PUMPER,RIGHT SIDE
189" Rollup Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION

PUMPHOUSE
Control Zone, PUC

PUMP
2000 GPM Pierce PUC

CROSSLAYS,1.50"
(2) 1.50", Poly Trays, 200'

CROSSLAYS,2.50"
(1) 2.50", Poly Tray, 200'

GENERATOR
Generator Not Required

Foam System
Husky 3 Single Agent

Foam Cell
Foam Cell Not Required

SAFETY
Side Roll and Frontal Impact Protection

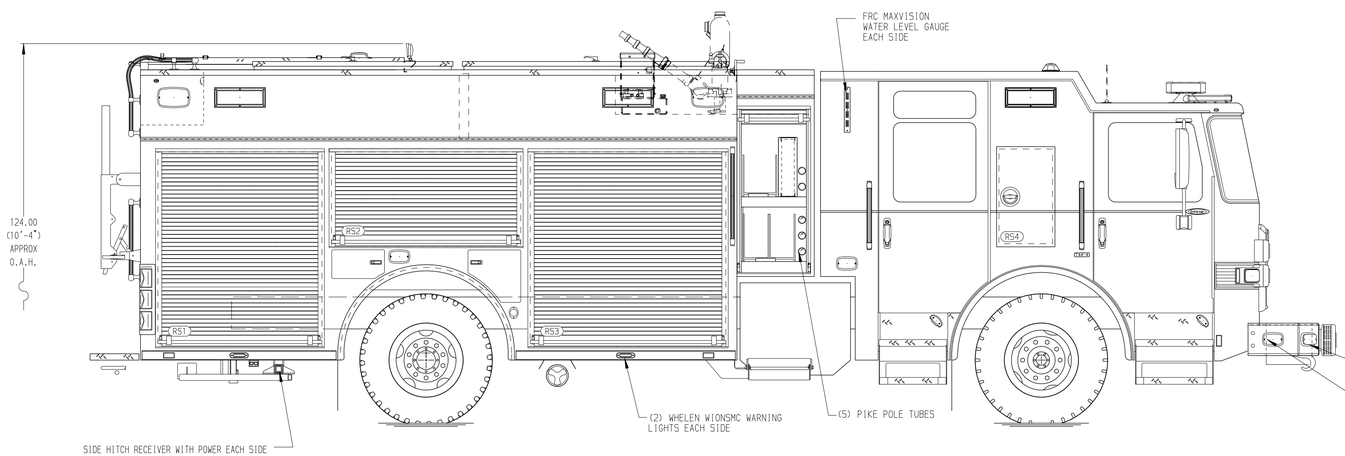

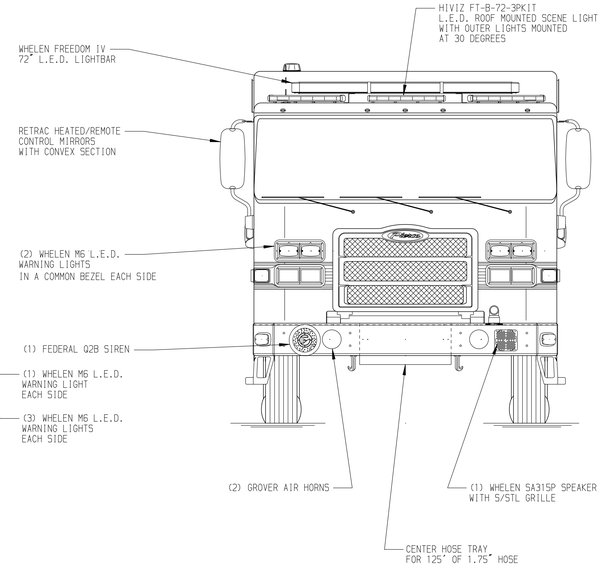

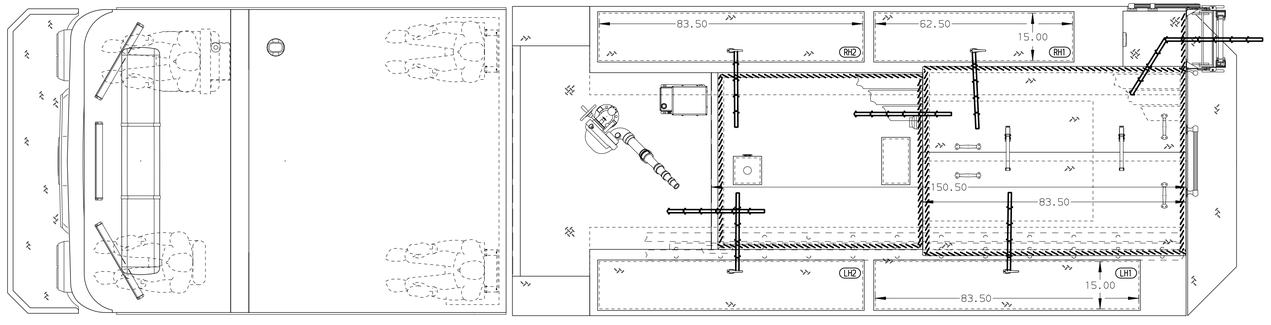

HOSEBED CAPACITIES
1. 1000' OF 5.00" D.J. POLY HOSE
2. 600' OF 3.00" D.J. POLY HOSE
3. 300' OF 2.50" D.J. POLY HOSE

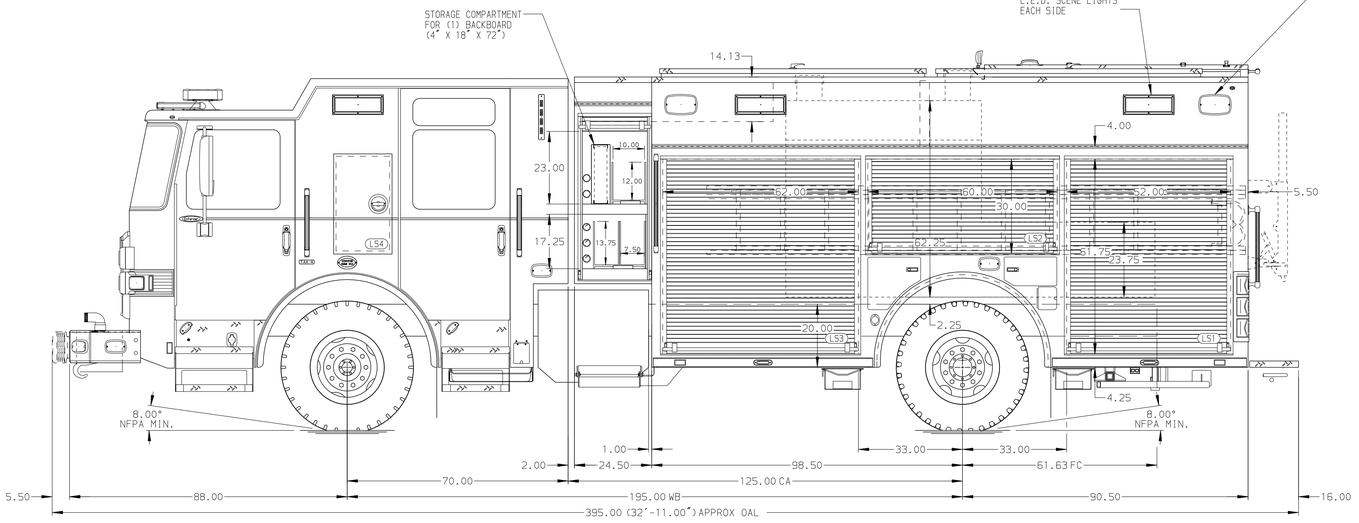

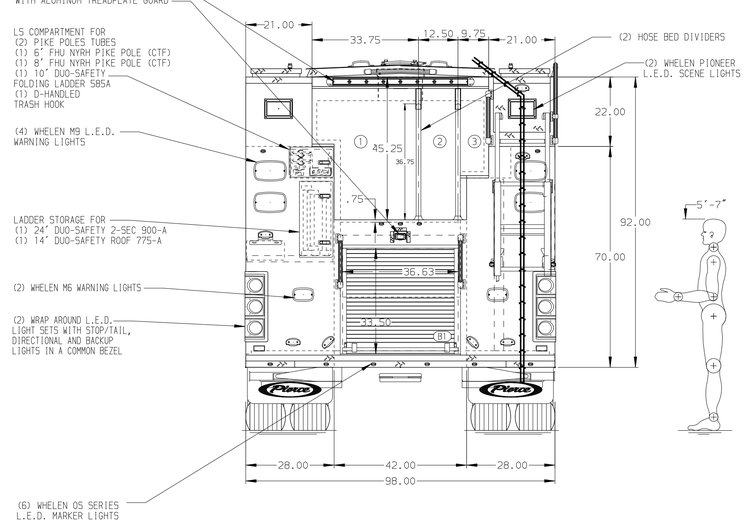

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 2.50 OUTLET WITH 2.50 PIPING AND SWIVEL LOCATED ON TOP OF THE LEFT SIDE OF THE BUMPER
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO EJECT ON THE DRIVER'S SIDE STEPWELL
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. PARTITION BETWEEN LS1/B1 AND RS1/B1
7. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT THE REAR
8. FIVE ADJUSTABLE SHELVES LOCATED PER ORDER
9. TWO TILT/ SLIDE-OUT ADJUSTABLE TRAYS LOCATED PER ORDER
10. SIX FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
11. ONE SWING-OUT TOOLBOARD LOCATED PER ORDER
12. TWO ALUMINUM TOOLBOARDS ADDED TO SLIDE-OUT TRAY LOCATED PER ORDER
13. TWO VERTICAL PARTITIONS LOCATED PER ORDER
14. PEGBOARD MOUNTED PER ORDER
15. 3-SLOT AIR BAG RACK LOCATED PER ORDER

REV	DATE	BY	CH
V	28APR26	LST	TDC
V	23FEB26	LST	TDC
V	23JAN26	LST	TDC

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce PUC Pumper Approval Drawing
FOR: City of Richmond Heights Fire Department
DWG NO.: 41363AD

JOB NO.: 41363
SCALE: 1:24
DATE
DRAWN BY: LST 17NOV25
CHECKED BY: MMF 17NOV25
SHEET SIZE: D
SHEET NO.: 1 OF 1

View File Created 28-APR-2026 13:24:09