


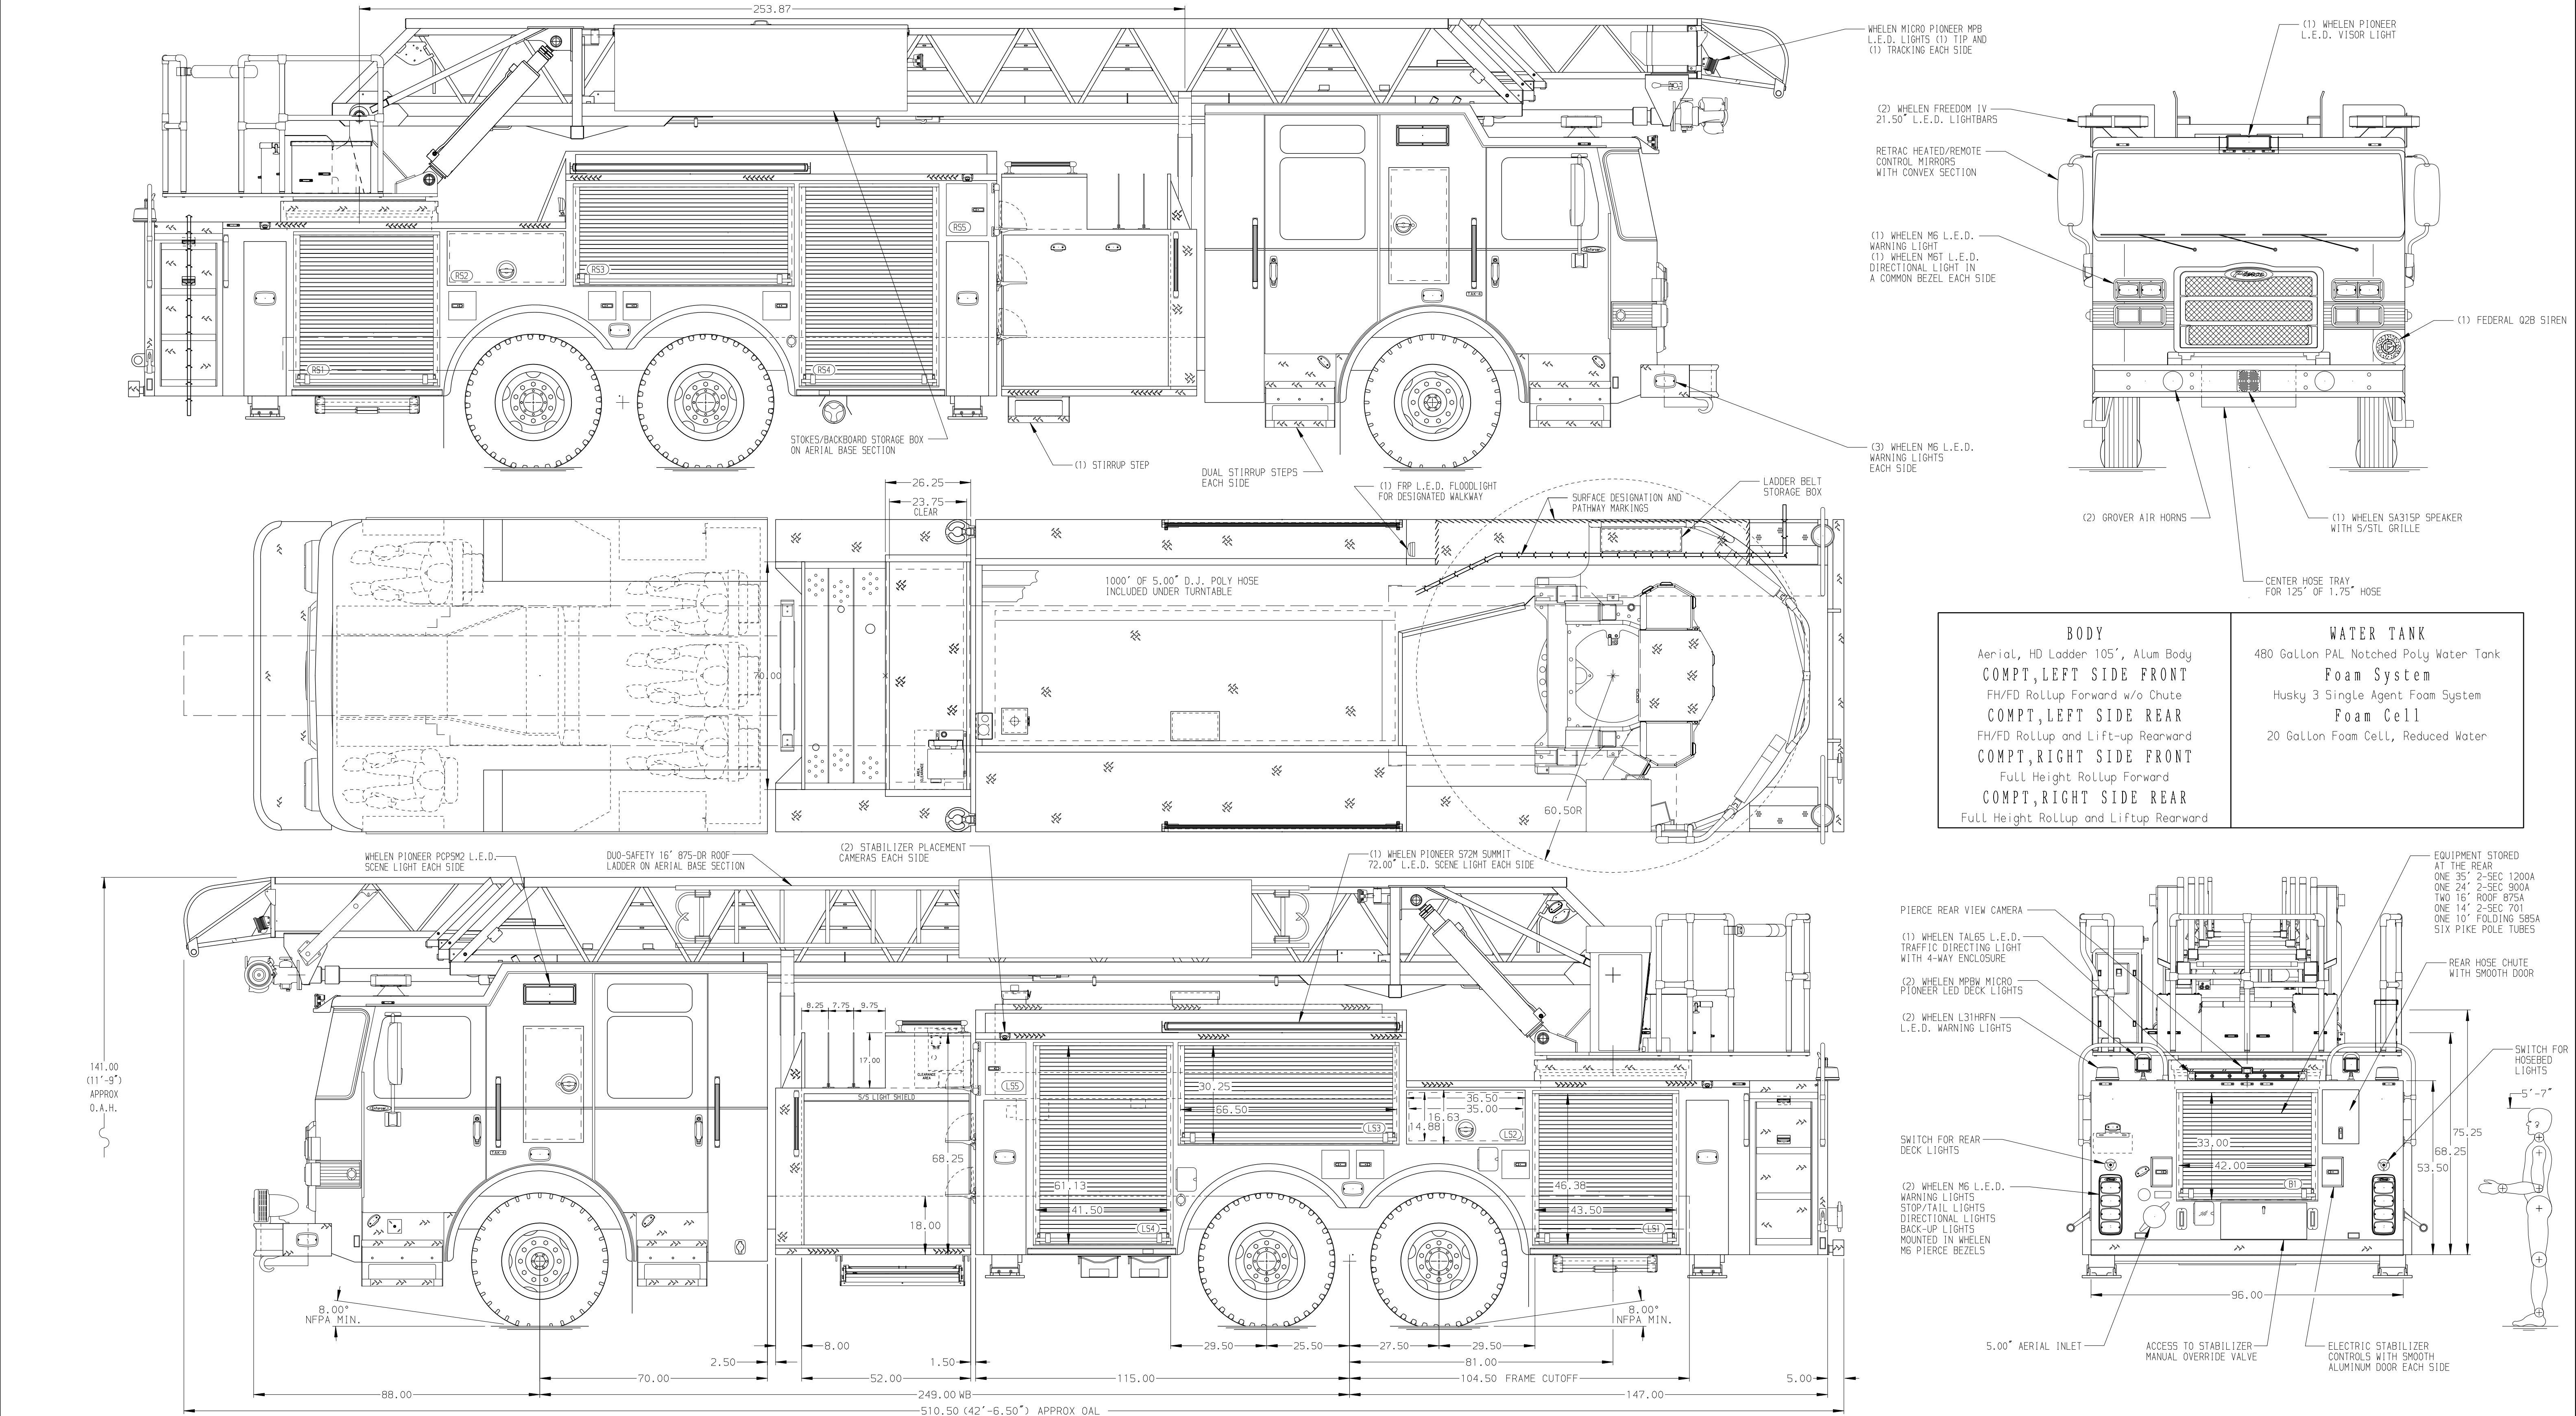

CHASSIS Enforcer Chassis ENGINE 500 HP Cummins X12 Engine		CAB 7010 Notched Enforcer Cab BUMPER 19" Extended Stainless Steel	AXLE, FRONT, CUSTOM 22,800 Lb TAK-4 Axle AXLE, REAR 48,000 Lb Meritor Axle	TRANSMISSION Allison 5th Gen, 4500 EVS P	PUMPHOUSE 52" Control Zone Side Mount PUMP 2000 GPM Watertous CSU	CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity	SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required	SAFETY Side Roll and Frontal Impact Protection	CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____	 MANUFACTURING INC.		JOB NO. 37545							
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.		1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 2. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE BEHIND THE CREW CAB DOOR 3. AIR INLET WITH DISCONNECT COUPLING IN A RECESSED ALUMINUM TREADPLATE BOX IN THE DRIVER SIDE STEPWELL 4. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT 5. BATTERY CHARGE INDICATOR LOCATED BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW 6. WHEEL 700CELZR L.E.D. LIGHT LOCATED AT THE FRONT OF THE HOSE BED 7. L.E.D. LIGHT STRIPS LOCATED IN THE HOSE BED PER SHOP ORDER 8. FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER 9. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER 10. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER 11. ONE SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT PER SHOP ORDER 12. ONE 120V DUPLEX RECEPTACLE IN EACH CAB EMS COMPARTMENT 13. 3.00" RAISED AERIAL PEDESTAL 14. LIFTING EYE RESCUE ATTACHMENT AT AERIAL TIP 15. 28.50" LIMITED RETRACTION REQUIRED 16. TURNABLE SHORTENED RIGHT SIDE 17. MOUNTING PROVISIONS FOR FRONT INLET								SCALE 1:24	DATE								
														CHASSIS DATA	TITLE	105' AERIAL LADDER AND BODY ASSEMBLY		DRAWN BY COL	260CT21
														MAKE	FOR	PIERCE FIELD UNIT		CHECKED BY THS	260CT21
														PIERCE		APPLETON, WISCONSIN			
														MODEL				SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	ENFORCER	DWG NO.	37545AD		D	1 OF 1										

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE BEHIND THE CREW CAB DOOR
3. AIR INLET WITH DISCONNECT COUPLING IN A RECESSED ALUMINUM TREADPLATE BOX IN THE DRIVER SIDE STEPPWELL
4. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
5. BATTERY CHARGE INDICATOR LOCATED BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
6. WHELEN 700CELZR L.E.D. LIGHT LOCATED AT THE FRONT OF THE HOSE BED
7. L.E.D. LIGHT STRIPS LOCATED IN THE HOSE BED PER SHOP ORDER
8. FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
9. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
10. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER

11. ONE SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT PER SHOP ORDER
12. ONE 120V DUPLEX RECEPTACLE IN EACH CAB EMS COMPARTMENT
13. 3.00" RAISED AERIAL PEDESTAL
14. LIFTING EYE RESCUE ATTACHMENT AT AERIAL TIP
15. 28.50" LIMITED RETRACTION REQUIRED
16. TURNABLE SHORTENED RIGHT SIDE
17. MOUNTING PROVISIONS FOR FRONT INLET