PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
Hard Wired

CHASSIS

AXLE, FRONT, CUSTOM
20,000 Lb Meritor Axle

AXLE, REAR
27,000 Lb Meritor Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
6000 Enforcer Cab

BODY

TOTAL TANK CAPACITY
1000 Gallon New York Style Poly Tank

WATER CAPACITY
1000 Gallons of Water

FOAM CELL CAPACITY
Foam Cell Not Required

COMPT, PUMPER, REAR
30.75" FF Lap Rear Compt

COMPT, PUMPER, LEFT SIDE
161" Lap Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE
161" Lap Low FDLER

FIRE SUPPRESSION

PUMPHOUSE
38" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
1.50" Crosslays Not Required

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
(2) 1.50" Standard Capacity

GENERATOR
Generator Not Required

FOAM SYSTEM
Foam System Not Required

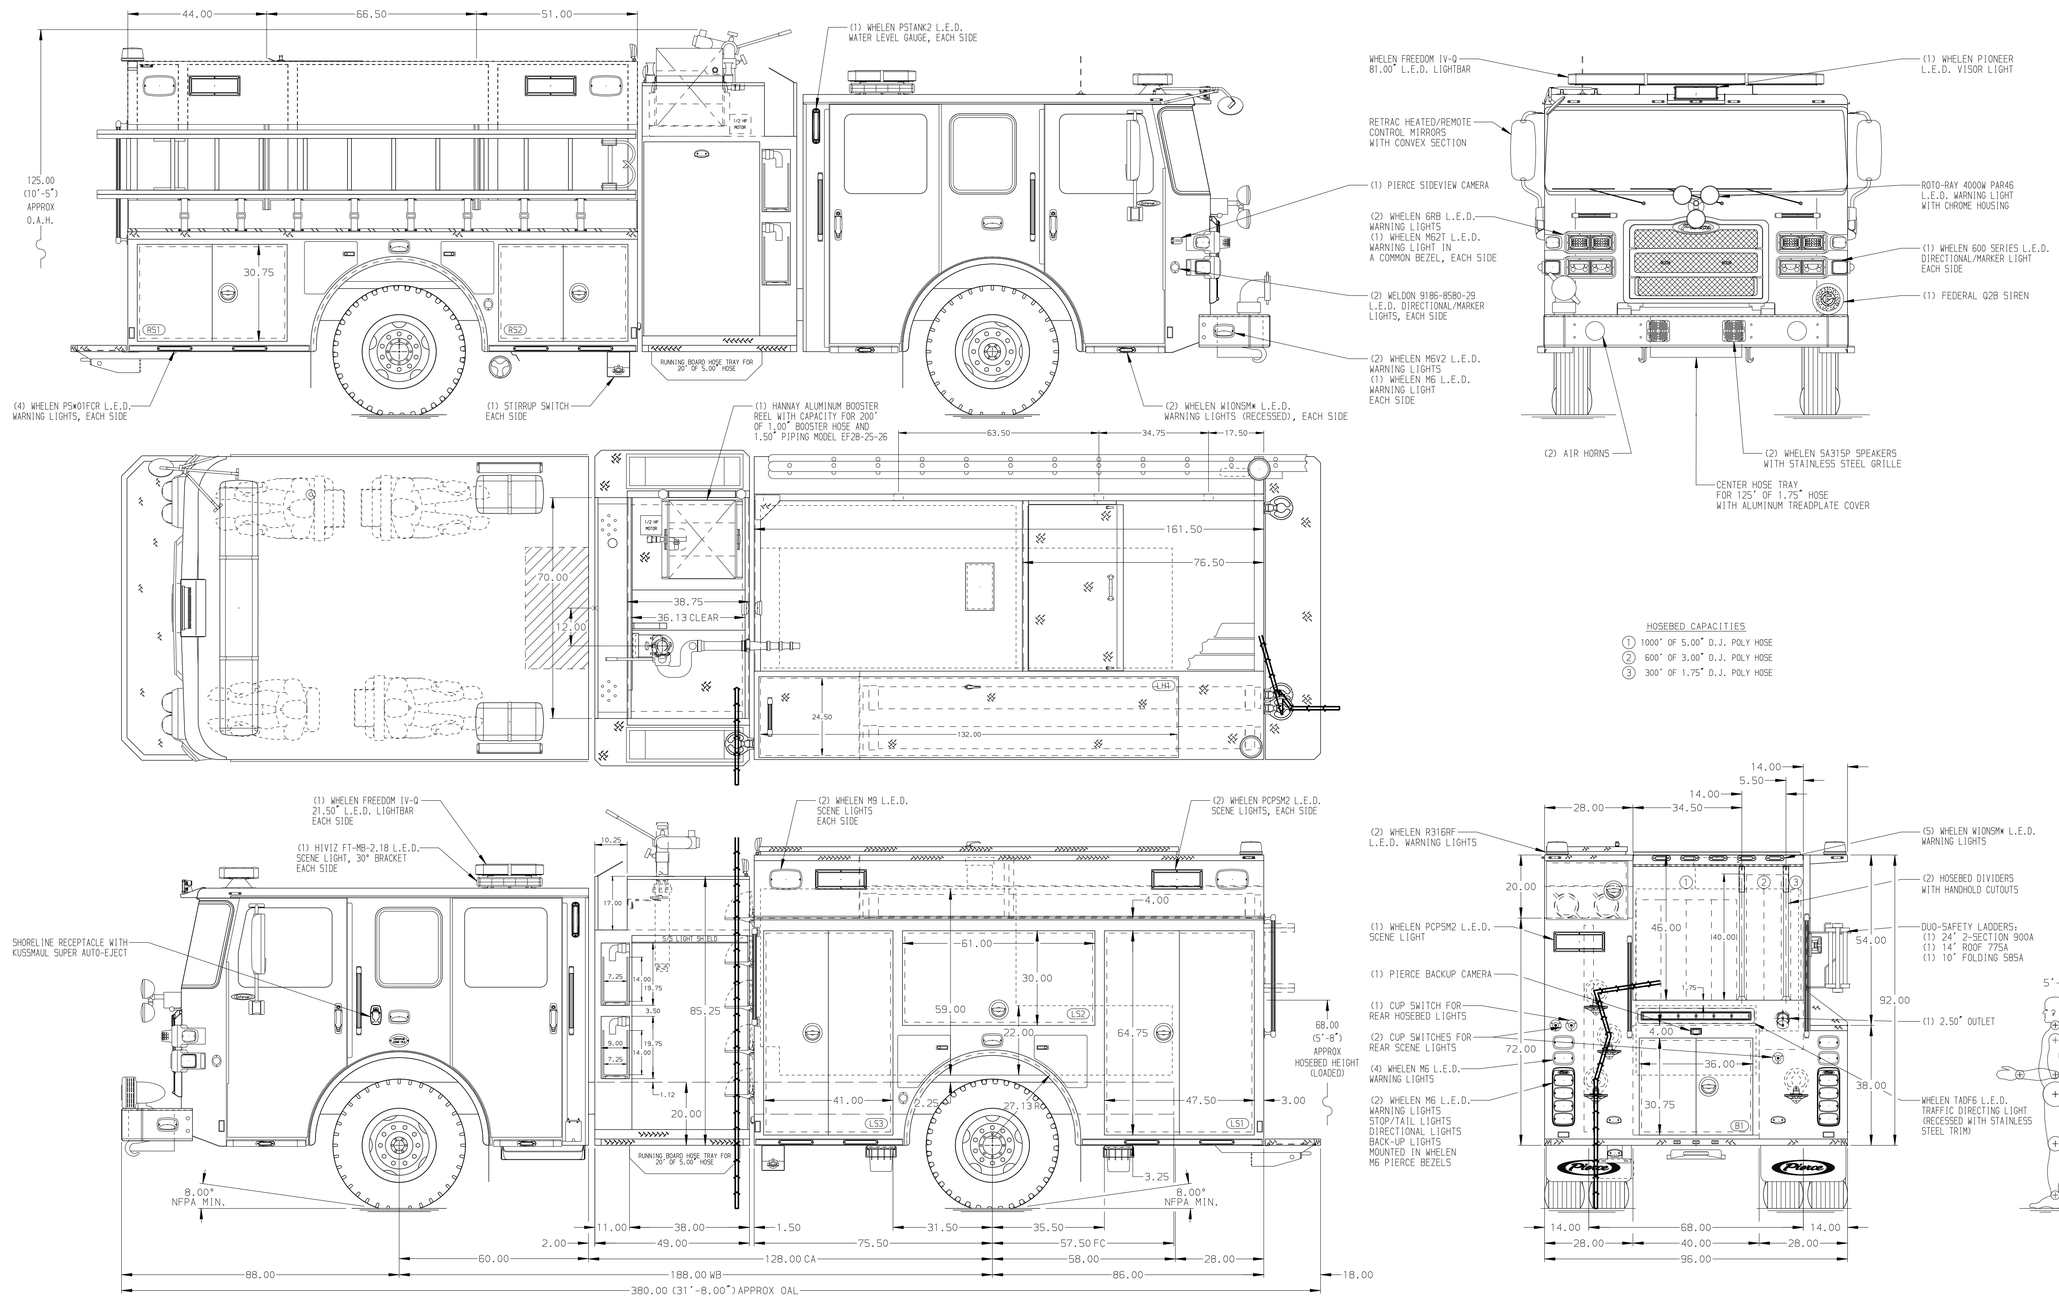

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
2. WIRING ONLY FOR OPTICOM EMITTER TO BE PROVIDED
3. AIR INLET/OUTLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED IN THE DRIVER SIDE STEPWELL
6. RECEPTACLE STRIP LOCATED IN CAB PER ORDER

REV	DATE	BY	CH
V	05JAN26	JDA	SGH
V	22SEP25	JDA	SGH
B	03SEP25	JDA	SGH
V	22AUG25	JDA	JJR

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
-
FOR: Lexington County Fire Service
-
DWG NO.: 41513AD-SH1

JOB NO.	41513
SCALE	1:24
DATE	
DRAWN BY	JDA 17JUL25
CHECKED BY	SGH 18JUL25
SHEET SIZE	D
SHEET NO.	1 OF 2

View File Created 05-JAN-2026 12:04:00