PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
Hard Wired

CHASSIS

AXLE, FRONT, CUSTOM
20,000 Lb Dana Axle

AXLE, REAR
27,000 Lb Meritor Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
ALlison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
770 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL CAPACITY
20 Gallon Foam Cell

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
152" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
152" Lap Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Top Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
1.50" Crosslays Not Required


CROSSLAYS, 2.50"
2.50" Crosslay Not Required


SPEEDLAYS
(2) 1.50" W/Tray Std. Capacity


GENERATOR
Generator Not Required

FOAM SYSTEM
Husky 3 Single Agent Foam System

SAFETY
Side Roll and Frontal Impact Protection

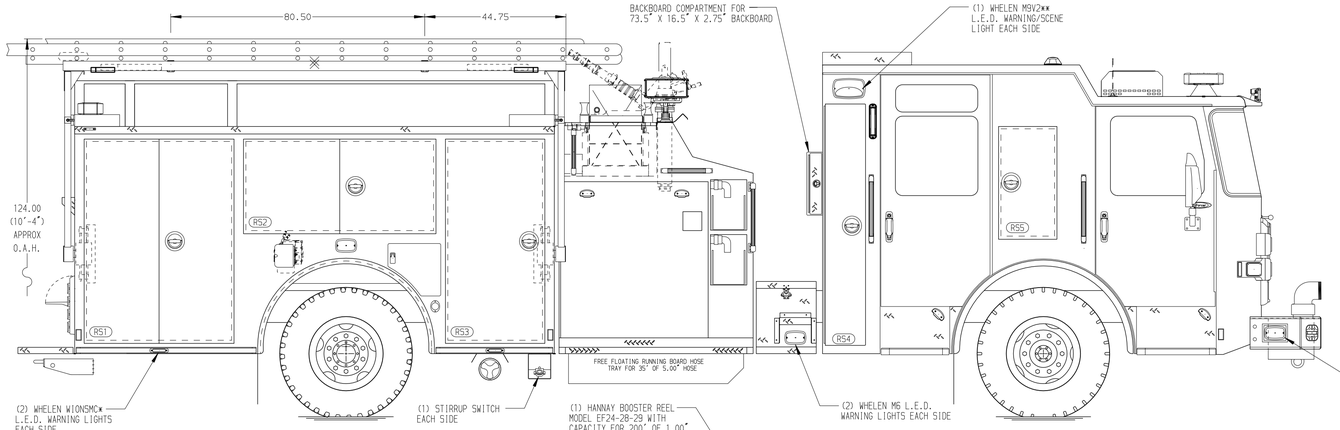


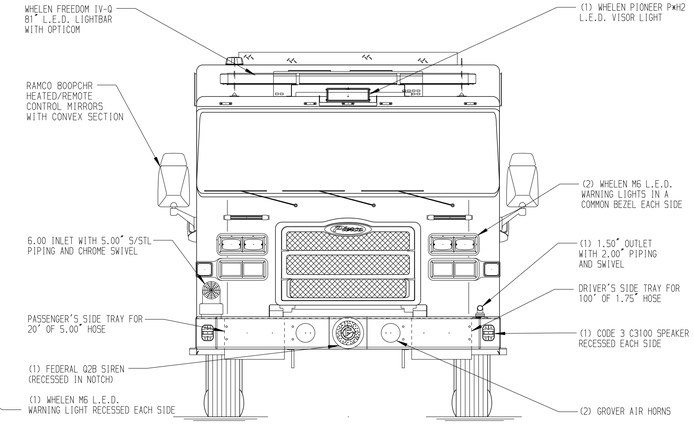


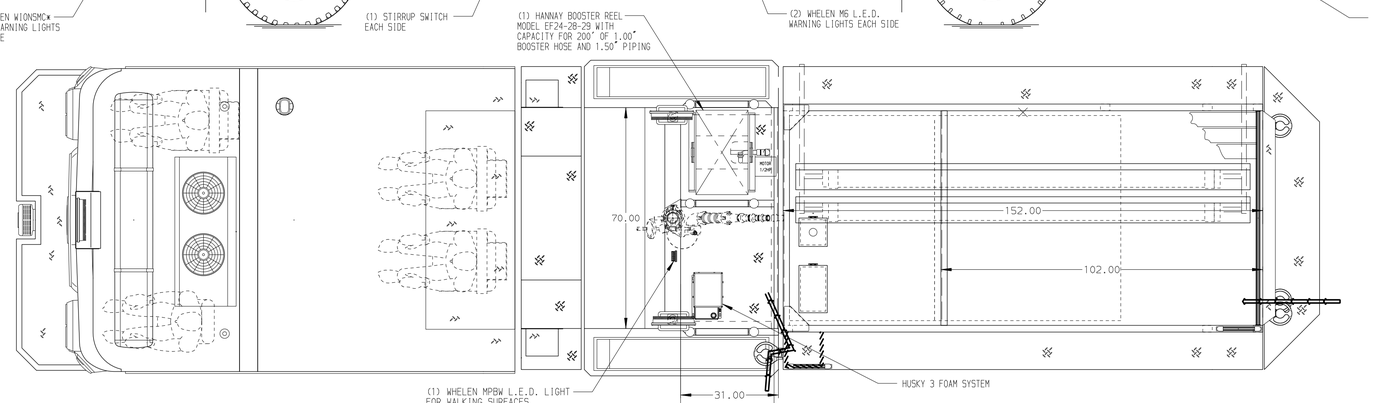

HOSEBED CAPACITIES

1. 500' OF 1.75" D.J. POLY HOSE
2. 500' OF 2.50" D.J. POLY HOSE
3. 800' OF 5.00" D.J. POLY HOSE
4. (2) 100' BUNDLES OF 1.75" HOSE W/ GATED WYE IN POLY TRAY (6.25"W X 14"H X 84"L)
5. (2) 50' BUNDLES OF 2.50" HOSE W/ NOZZLE IN POLY TRAY (6.25"W X 10"H X 84"L)

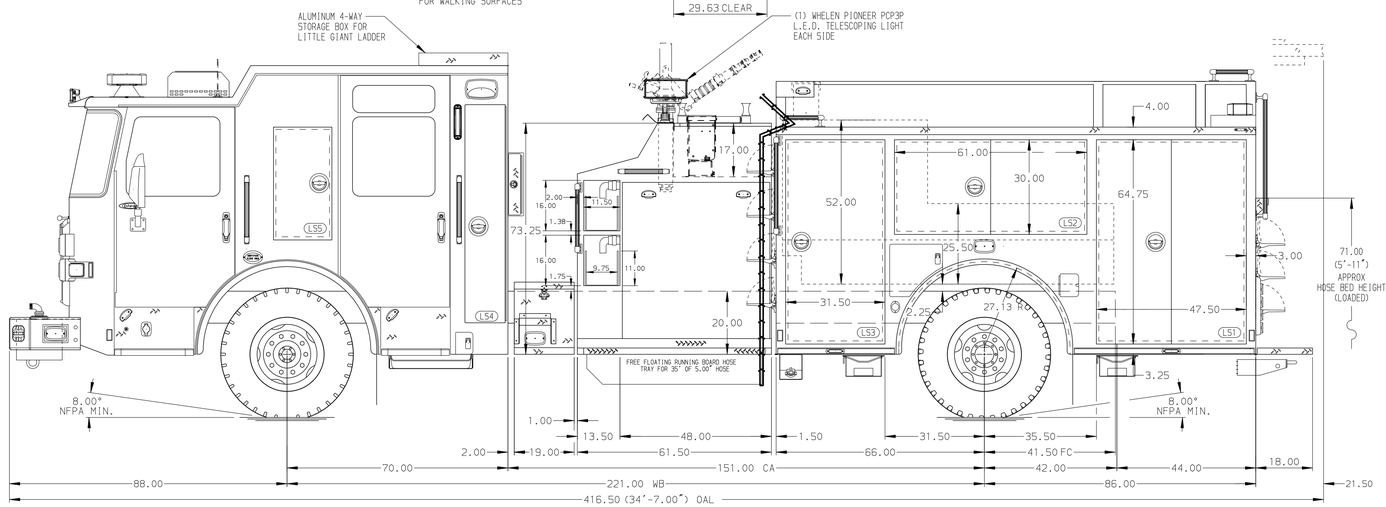

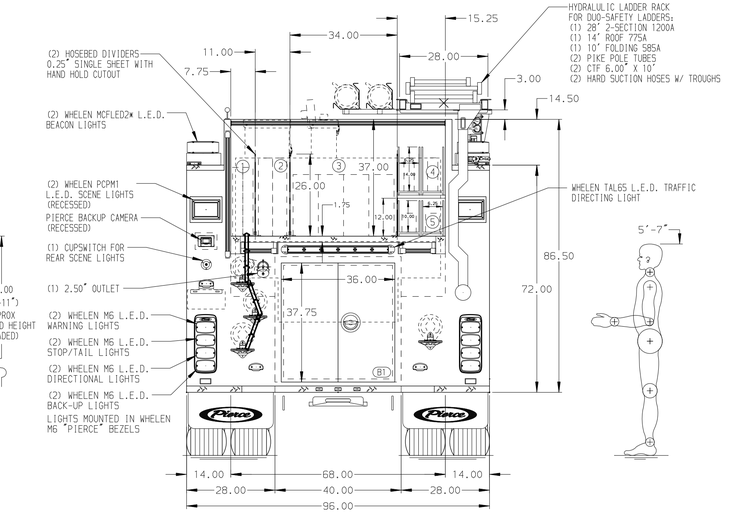

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER/COMPRESSOR LOCATED IN COMPARTMENT PER SHOP ORDER
3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. NINE ADJUSTABLE SHELVES LOCATED PER ORDER
5. FIVE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
6. ONE SWING OUT TOOLBOARD LOCATED PER ORDER
7. TWO SLIDE OUT TRAYS LOCATED PER ORDER
8. ONE PARTITION LOCATED PER ORDER
9. THREE PEGBOARDS LOCATED PER ORDER

REV	DATE	BY	CH	CHASSIS DATA
V	16FED26	JWR	TDC	MAKE
V	12FED26	JWR	TDC	PIERCE
V	19JAN26	JWR	TDC	MODEL
				ENFORCER

Pierce MANUFACTURING INC.

JOB NO.	41730 01-02		
SCALE	1:24	DATE	
TITLE	Pierce Pumper Approval Drawing -	DRAWN BY	JWR 05DEC25
FOR	Meridian Fire Department -	CHECKED BY	MMF 5DEC25
DWG NO.	41730AD	SHEET SIZE	D
		SHEET NO.	1 OF 1

View File Created 16-FEB-2026 13:19:53