
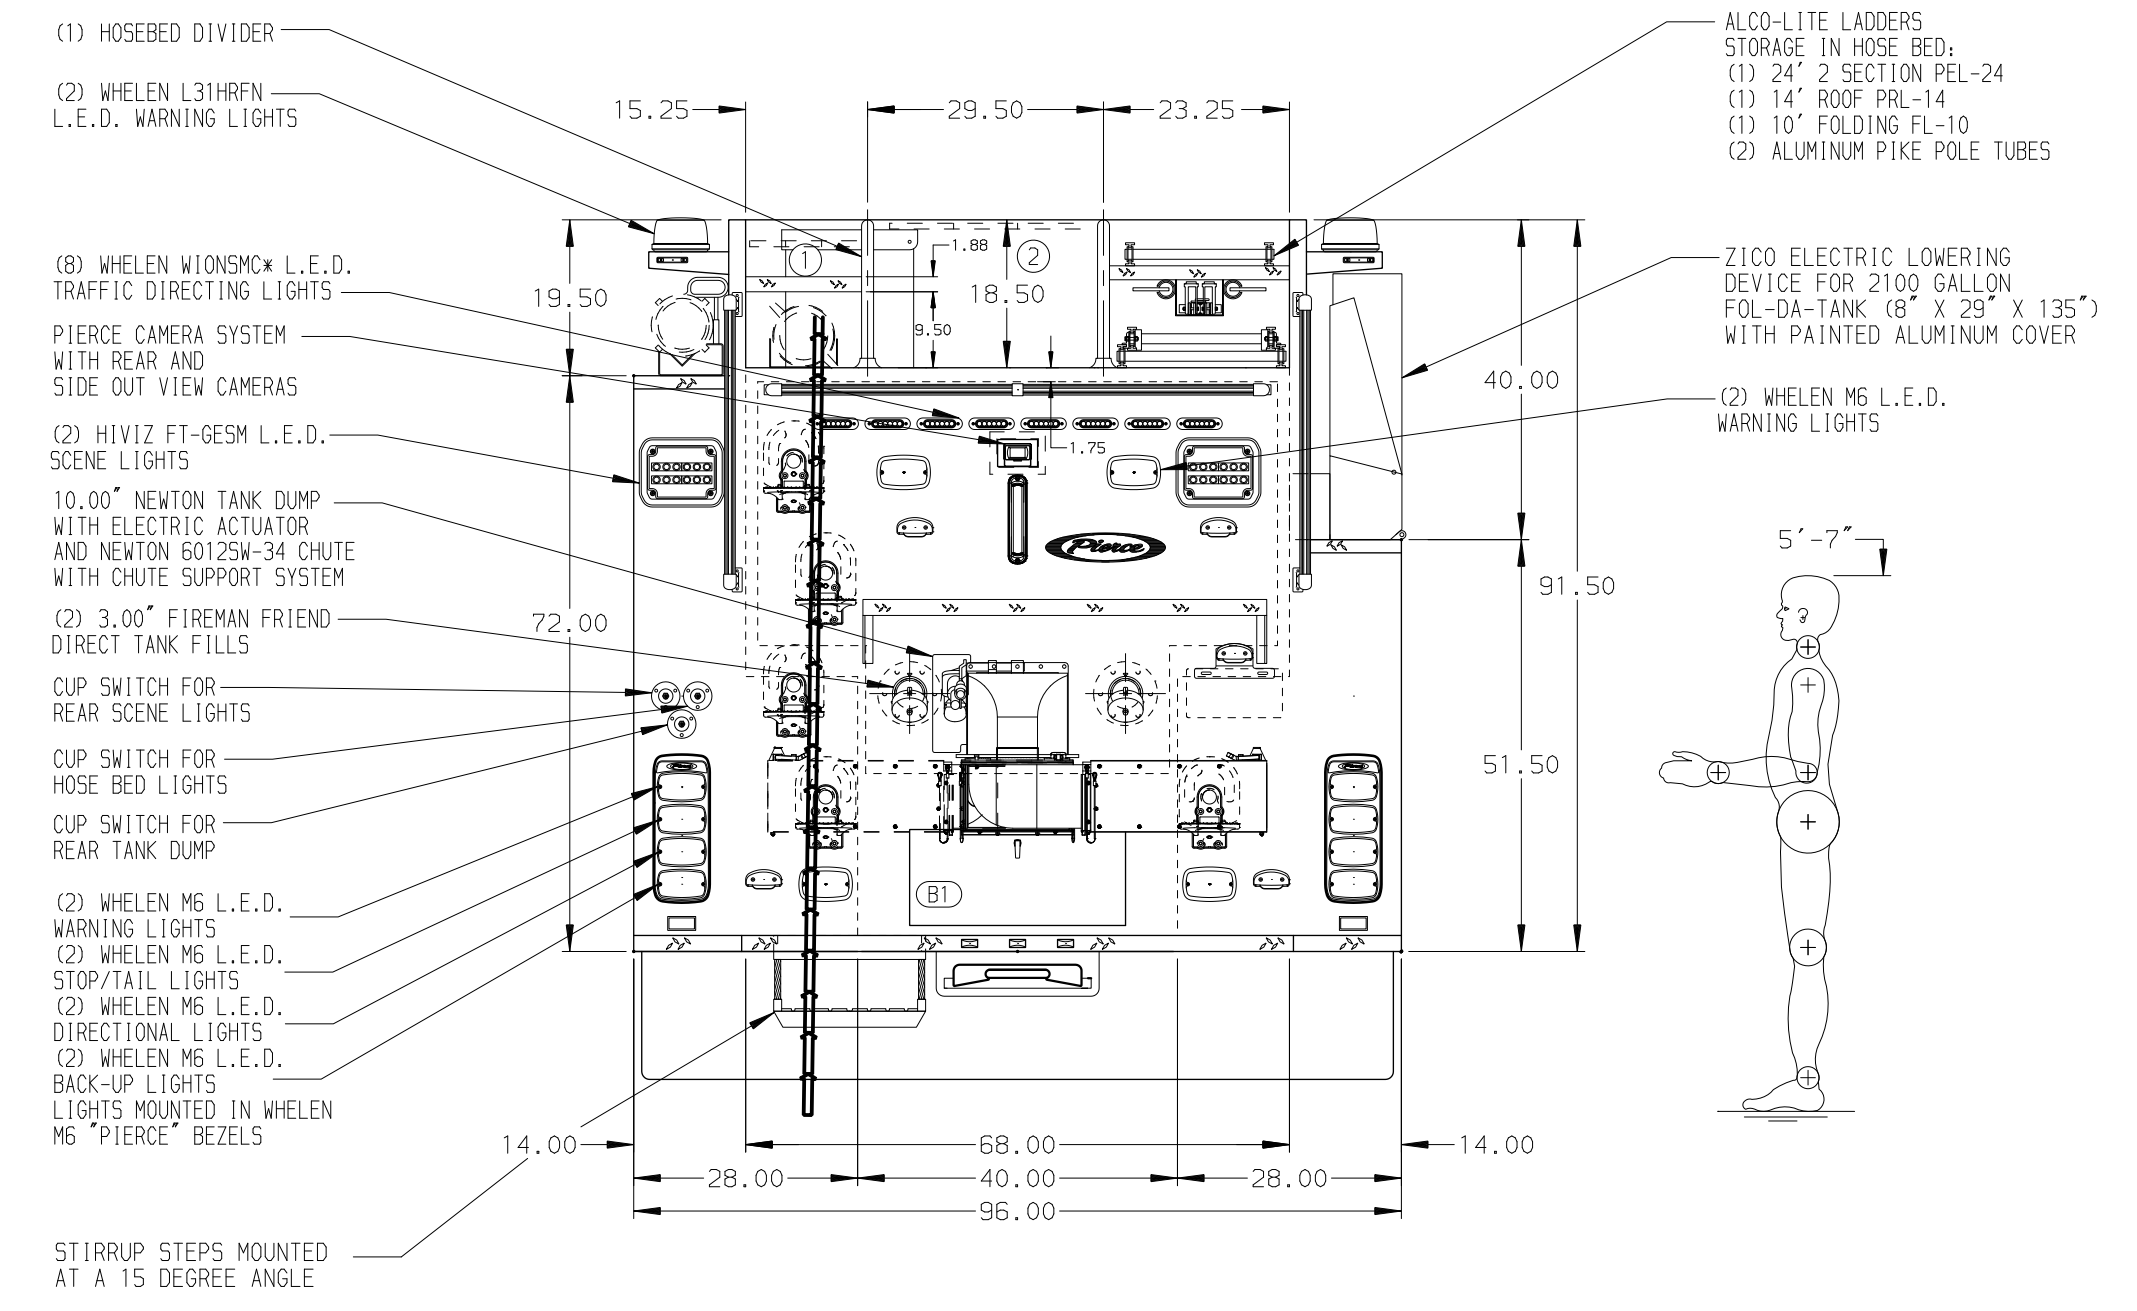


HOSEBED CAPACITIES

① - 200' OF 2.50" D.J. POLY HOSE

② - 1000' OF 5.00" D.J. POLY HOSE

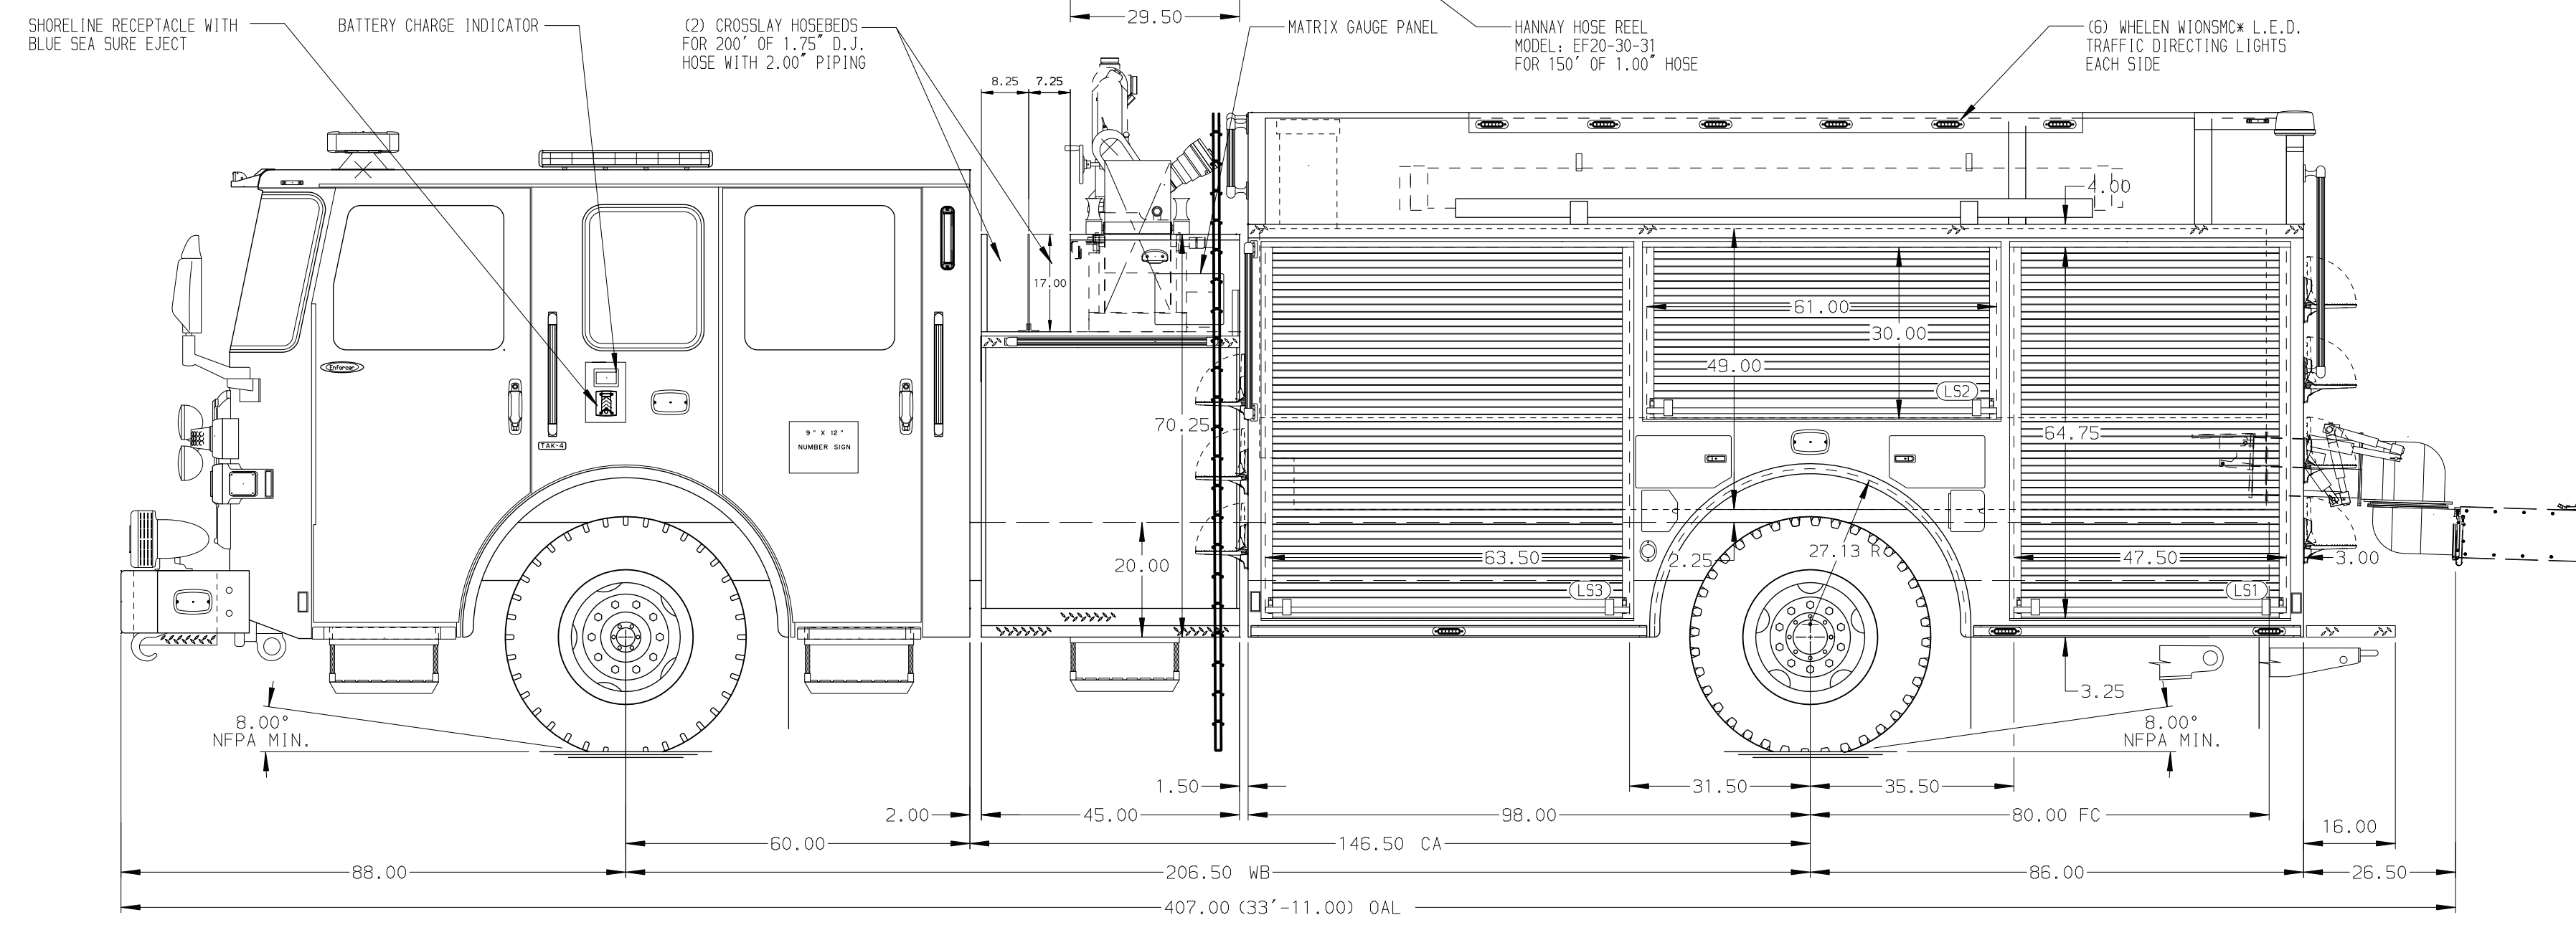

ALUMINUM BODY

MAXIMUM O.A.H. 115.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- AIR OUTLET WITH SHUT-OFF VALVE LOCATED ON LEFT SIDE PUMP PANEL
- BATTERY CHARGER LOCATED BEHIND THE DRIVER'S SEAT
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- AIR INLET WITH DISCONNECT COUPLING IN DRIVER'S SIDE STEP WELL
- HOWLER SIREN SPEAKER SYSTEM MOUNTED BEHIND BUMPER

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
CHASSIS DATA	TITLE	2000-D-1800P, 184" FULL HEIGHT LS, BROOM RS, FDLER LADDERS IN HOSEBED, (2) XLAYS, DELUGE, FOLDING TANK	
MAKE	FOR	KNOXVILLE FIRE DEPARTMENT KNOXVILLE, TENNESSEE	
PIERCE	DWG NO.	37844AD-SH1	
MODEL	ENFORCER		
REV	DATE	BY	CH



JOB NO.	37844
SCALE	1:24
DATE	
DRAWN BY	JJB
CHECKED BY	SMA
SHEET SIZE	D
SHEET NO.	1 OF 2