PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
MUX

CHASSIS

AXLE, FRONT, CUSTOM
19,500 Lb TAK-4 Axle

AXLE, REAR
27,000 Lb Dana Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
ALlison 6th Gen, 3000 EVS P

BUMPER
26" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
1000 Gallon Poly Tank

WATER CAPACITY
975 Gallons of Water

FOAM CELL CAPACITY
25 Gallon Foam Cell

COMPT, PUMPER, REAR
44.50" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
161" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
161" Lap Full Height and Depth Front & Rear

FIRE SUPPRESSION

PUMPHOUSE
45" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity


CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity


SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required


FOAM SYSTEM
Husky 12 Single Agent Foam System

SAFETY
Side Roll and Frontal Impact Protection

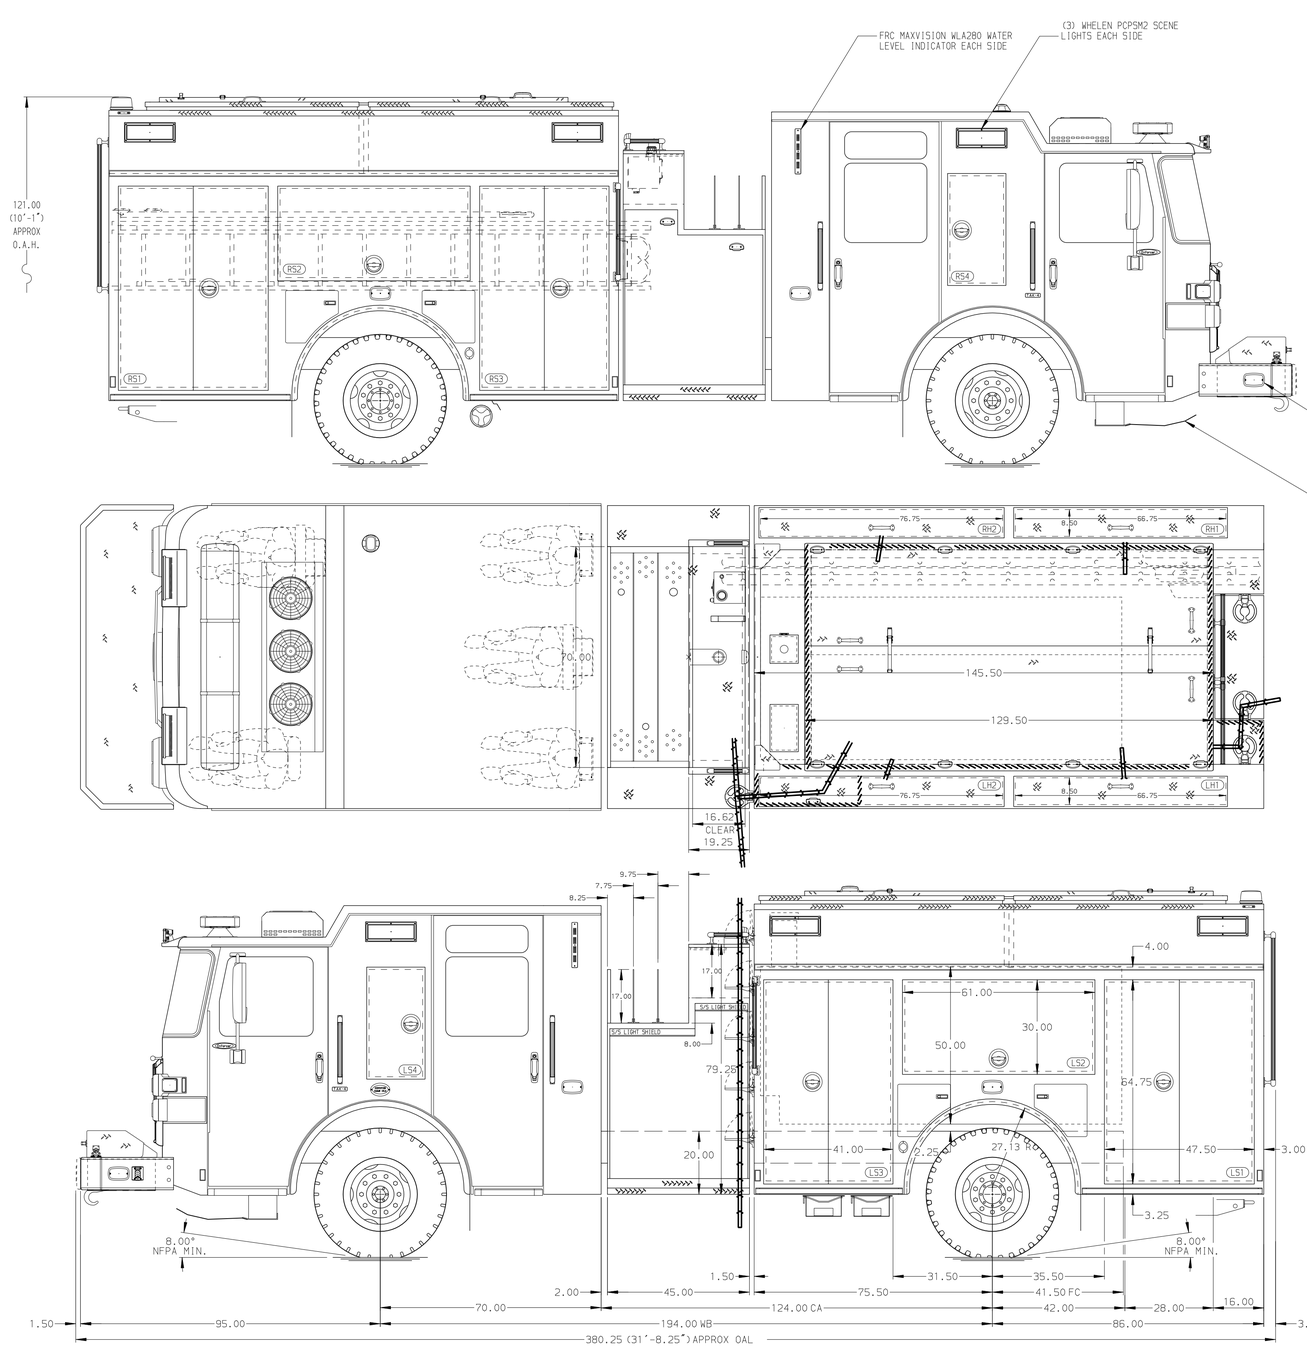

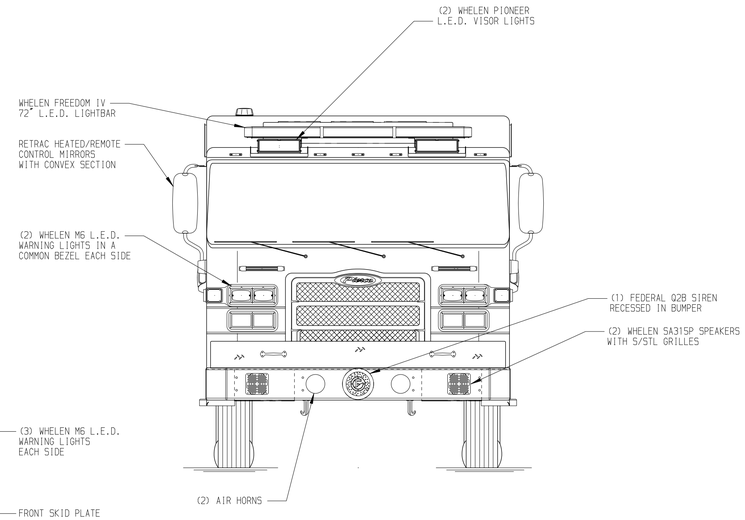

HOSEBED CAPACITIES
(1) 300' OF 3.00" D.J. POLY HOSE
(2) 1000' OF 5.00" D.J. POLY HOSE

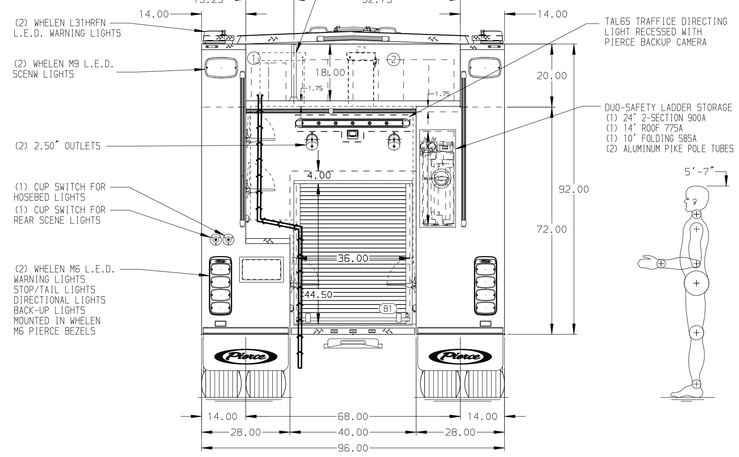

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED PER ORDER
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE BUMPER EXTENSION
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. NINE ADJUSTABLE SHELVES LOCATED PER ORDER
6. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
7. ONE SWING-OUT TOOLBOARD LOCATED PER ORDER
8. PEGBOARD PACK WALL MOUNTED LOCATED PER ORDER

REV	DATE	BY	CH
V	28JUL26	KLE	GKH
V	05MAR26	KSK	CHR
V	06FEB26	KLE	CHR

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
FOR: City Of Portland
DWG NO.: 41754AD

JOB NO.: 41754
SCALE: 1:24
DATE
DRAWN BY: KLE 04DEC25
CHECKED BY: KLH 4DEC25
SHEET SIZE: D
SHEET NO.: 1 OF 1

View File Created 18-AUG-2026 14:29:01