PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
Hard Wired

CHASSIS

AXLE, FRONT, CUSTOM
22,800 Lb Dana Axle

AXLE, REAR
31,000 Lb Dana Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
ALLison 6th Gen, 4000 EVS P

BUMPER
22" Extended 8 Ga Stainless Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
1000 Gallon New York Style Poly Tank

WATER CAPACITY
1000 Gallons of Water

FOAM CELL CAPACITY
20 Gallons of Foam

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
171" Rollup Full Height & Depth Front & Rear BIB

COMPT, PUMPER, RIGHT SIDE
171" Rollup Full Height & Depth Front & Rear
Cleveland Notch 12"

FIRE SUPPRESSION

PUMPHOUSE
52" Control Zone Side Mount

PUMP
1500 GPM Waterous CXC20

CROSSLAYS, 1.50"
(3) 1.50" Standard Capacity


CROSSLAYS, 2.50"
2.50" Crosslay Not Required


SPEEDLAYS
Speedlays Not Required


GENERATOR
Generator Not Required


FOAM SYSTEM
Single Agent Husky 3

SAFETY
Side Roll and Frontal Impact Protection
Not Required

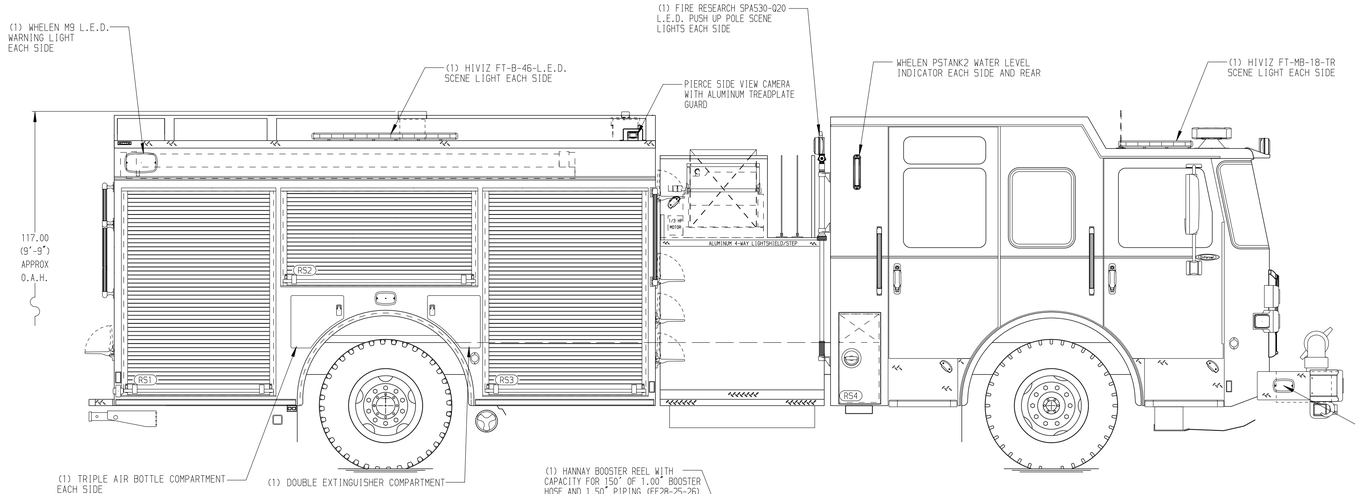

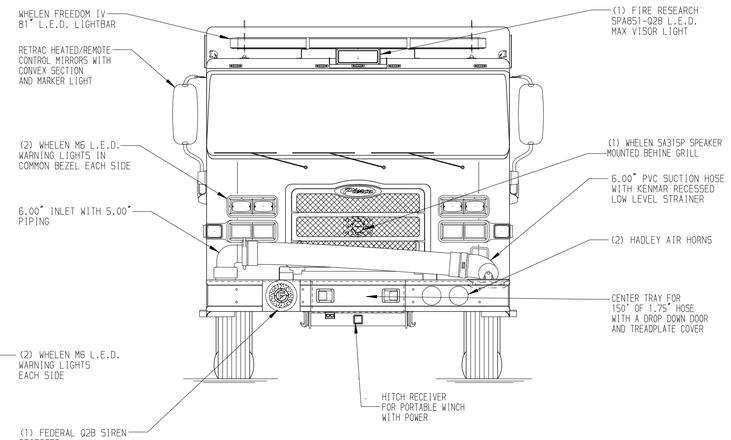

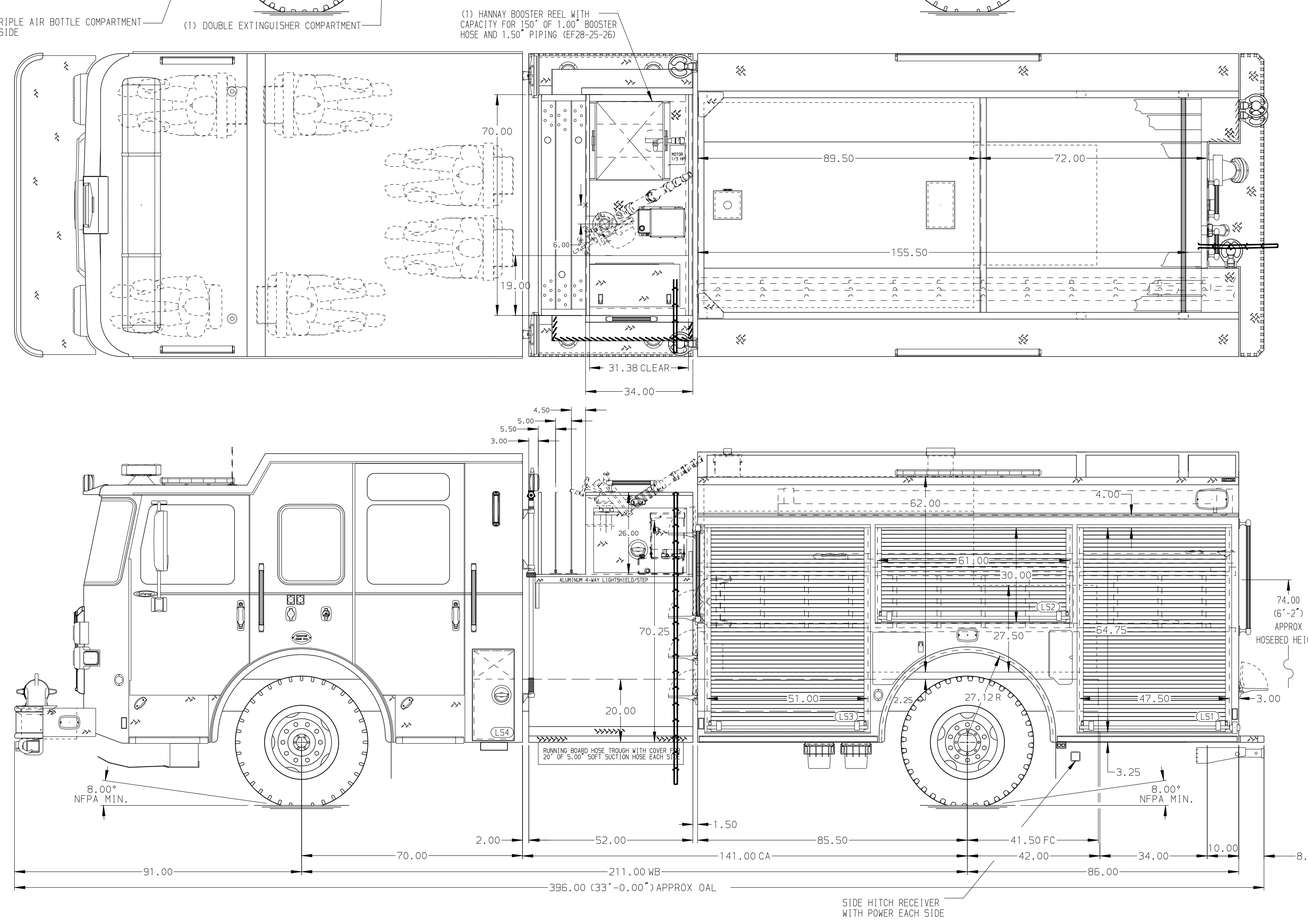

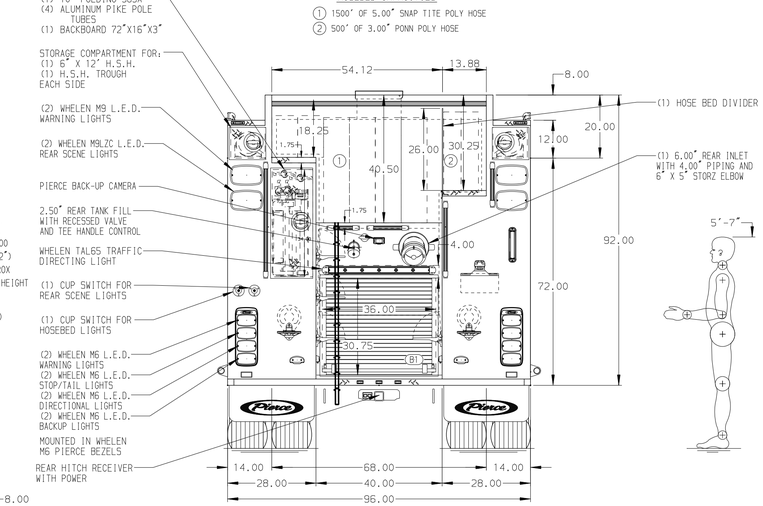

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING LOCATED IN CENTER BUMPER TRAY
2. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN LS RUNNING BOARD TRAY
3. AIR OUTLET WITH SHUT OFF VALVE ON DS PUMP PANEL
4. RECESSED AIR INLET WITH KUSSMAUL AIR EJECT WITH WEATHERPROOF COVER LOCATED PER ORDER
5. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED PER ORDER
6. BATTERY CHARGER INDICATOR LOCATED PER ORDER
7. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
8. FOUR ADJUSTABLE SHELVES LOCATED PER ORDER
9. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
10. ONE SWING OUT TOOL BOARDS LOCATED PER ORDER
11. THREE PARTITIONS LOCATED PER ORDER
12. THREE PEGBOARDS ON BACK WALL LOCATED PER ORDER
13. FOUR SLIDE-OUT TRAYS LOCATED PER ORDER
14. TWO TILT/SLIDE-OUT TRAYS LOCATED PER ORDER
15. ONE SLIDE OUT TOOLBOARD LOCATED PER ORDER
16. ALUMINUM TREADPLATE ON FLOOR IN COMPARTMENTS PER SHOP ORDER

REV	DATE	BY	CH
5	22SEP26	LST	MCJ
4	01SEP26	LST	MCJ
3	13JUL26	LST	MCJ
2	29MAY26	BTH	JKR
1	18FEB26	LST	MCJ

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

JOB NO. 41796
SCALE 1:24
DATE
TITLE: Pierce Pumper Approval Drawing
FOR: Township of Harmony Fire Department
DRAWN BY JER 11DEC25
CHECKED BY MMF 11DEC25
DWG NO. 41796AD
SHEET SIZE D
SHEET NO. 1 OF 1

View File Created 22-SEP-2026 13:38:58