
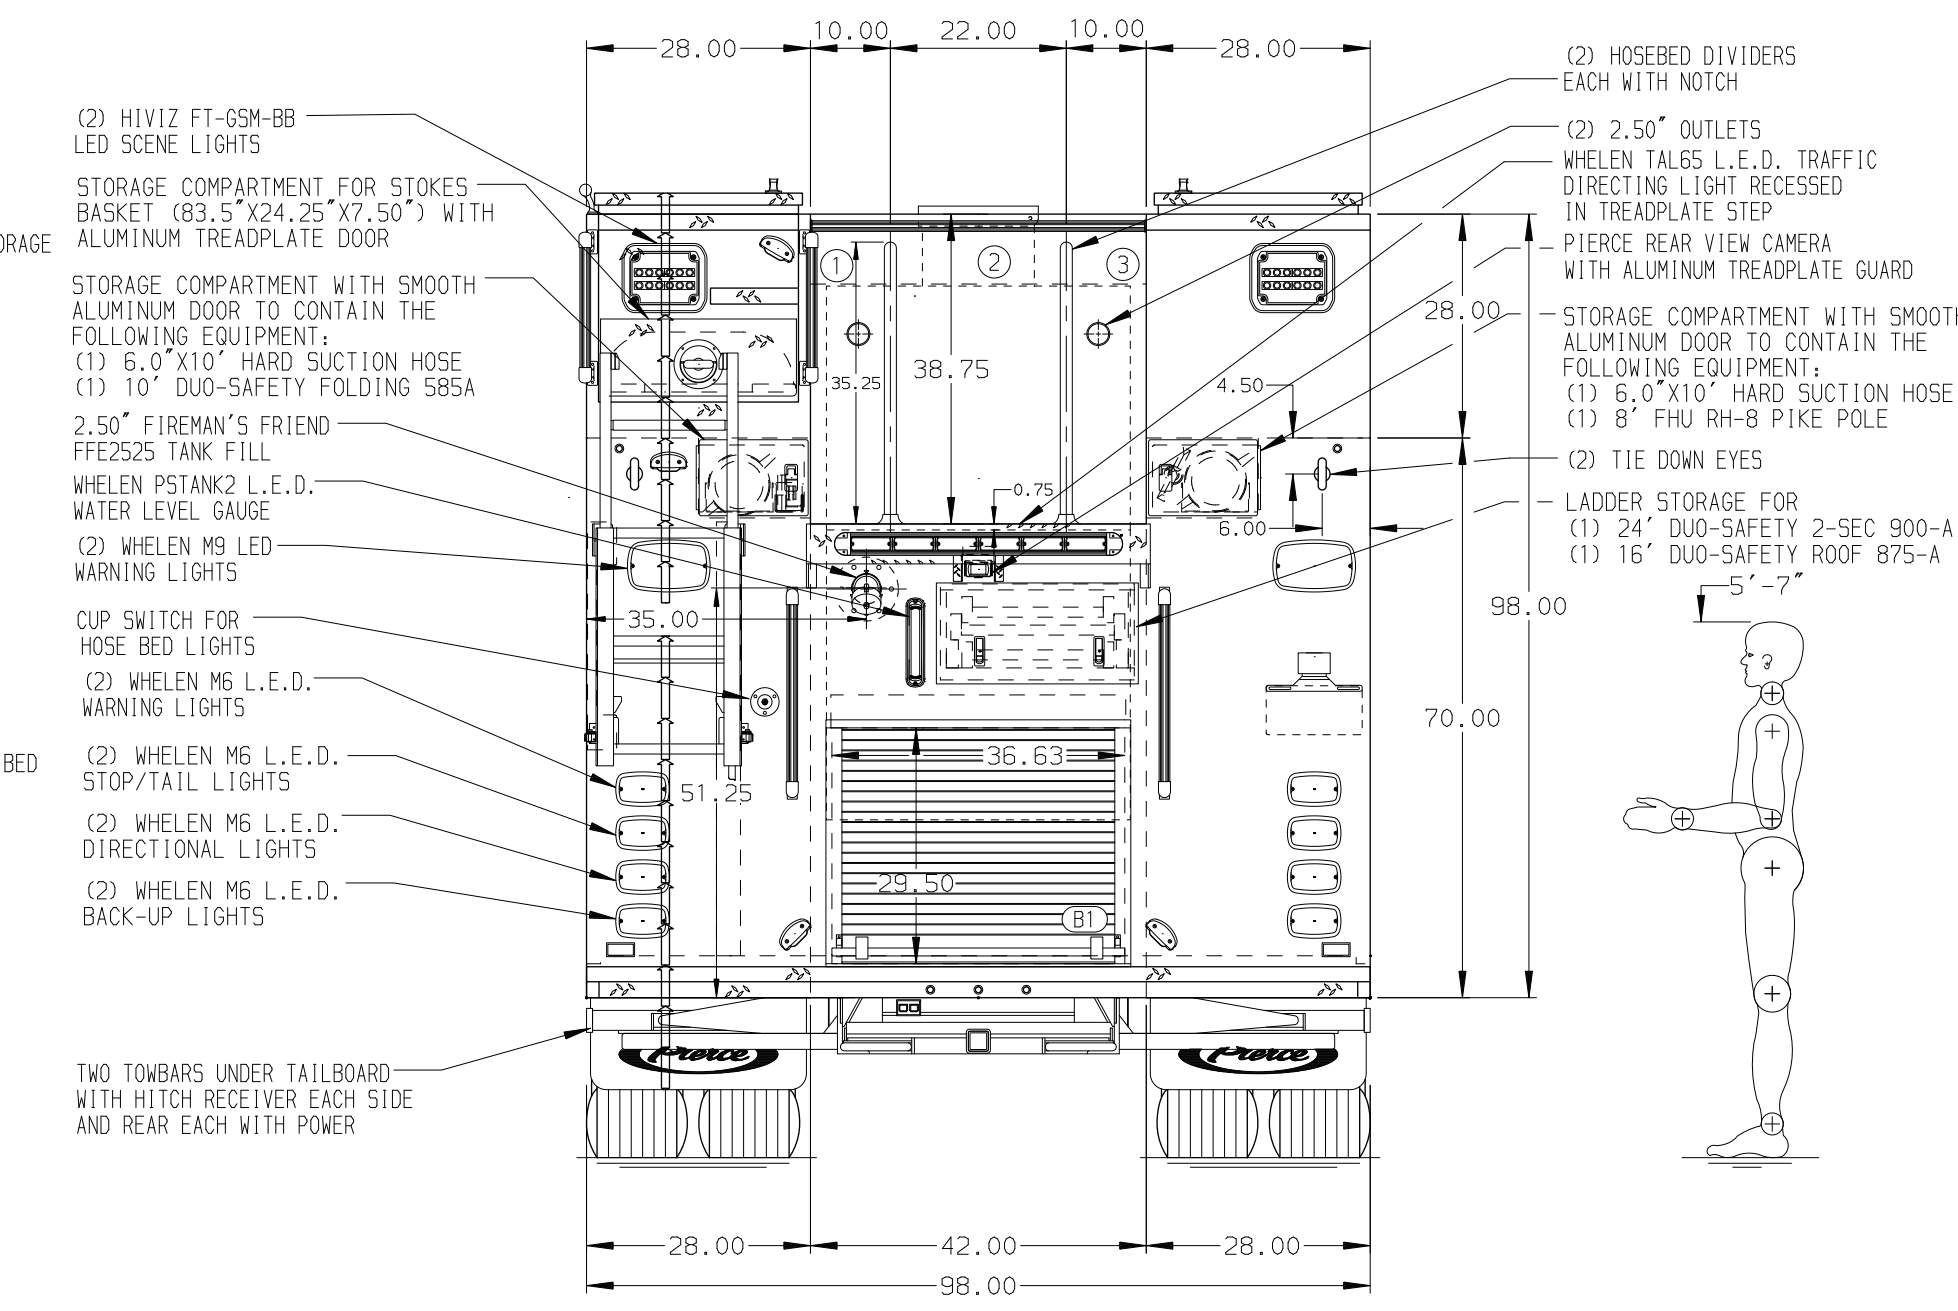


- HOSEBED CAPACITIES**
- ① 400' OF 2.50" D.J. POLY HOSE (PRECONNECTED)
 - ② 1000' OF 4.00" D.J. POLY HOSE
 - ③ 400' OF 2.50" D.J. POLY HOSE (PRECONNECTED)

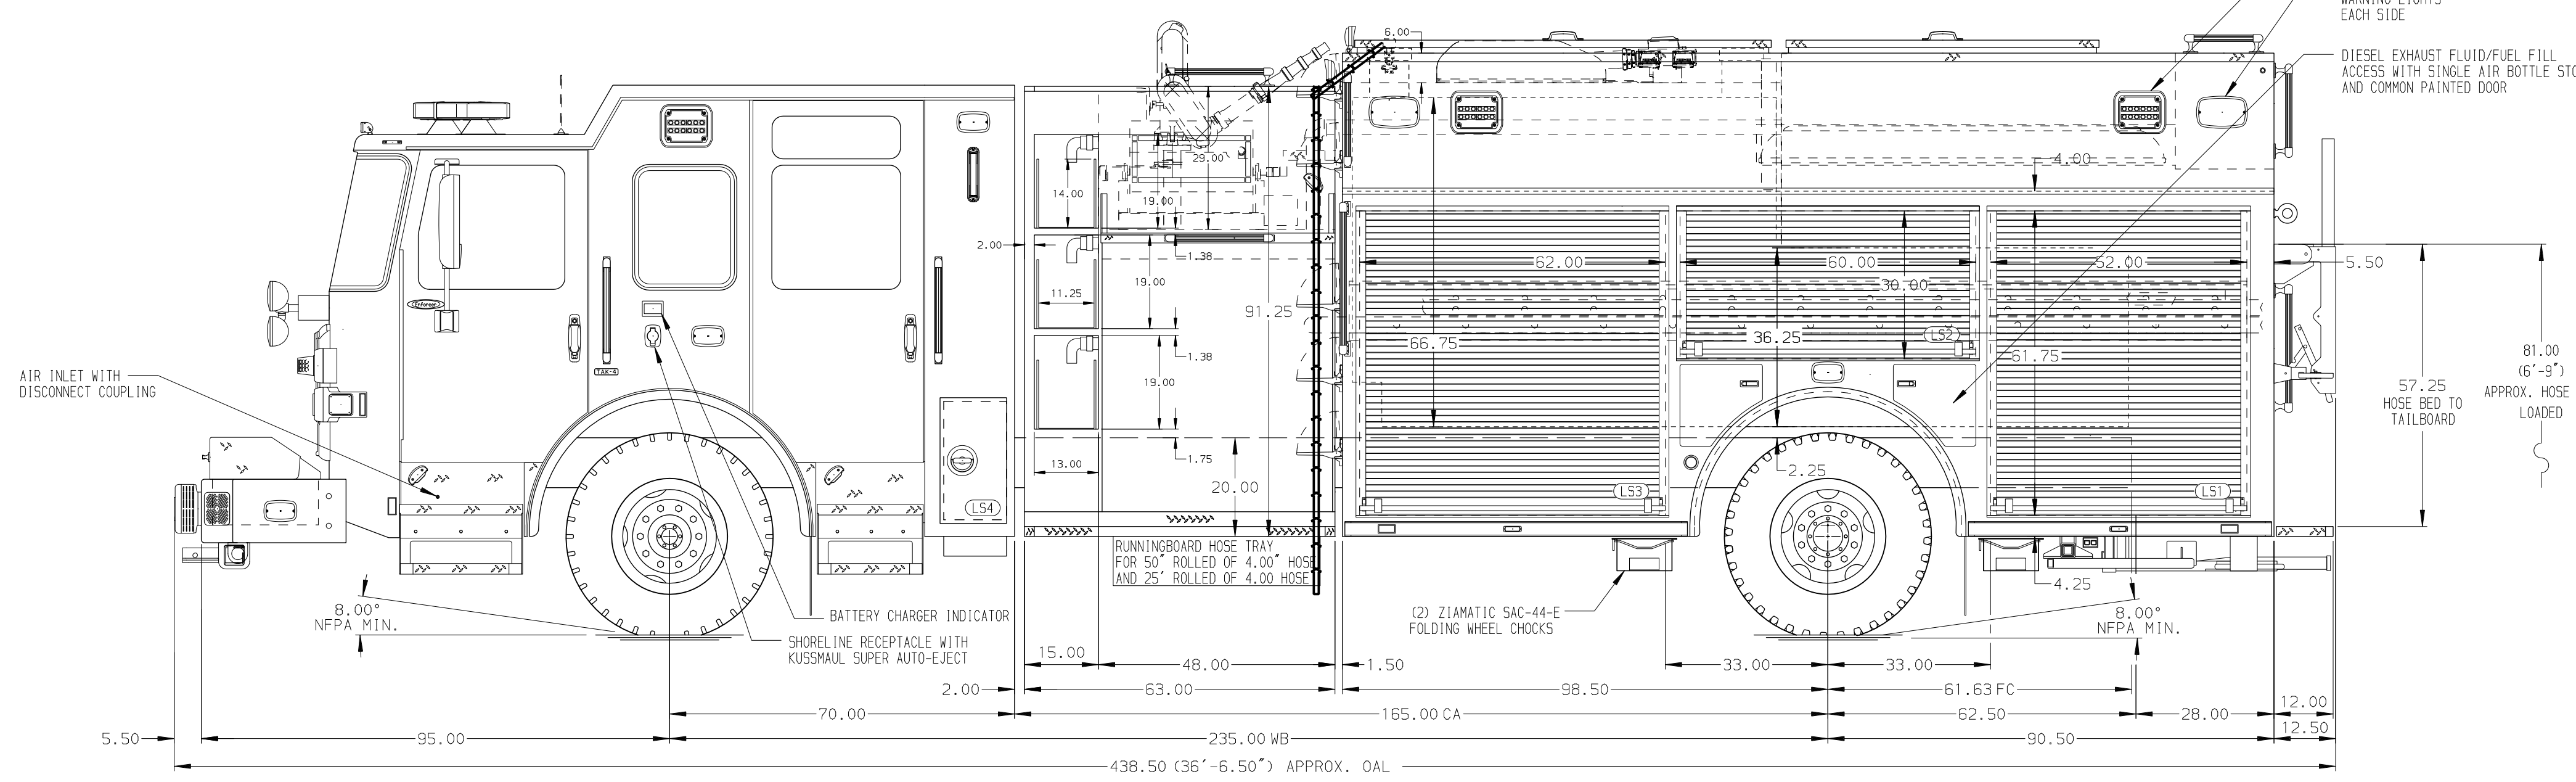

ALUMINUM BODY SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. AIR OUTLET WITH SHUT-OFF VALVE LOCATED R5 PUMP PANEL
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. AKRON EDUCTOR SINGLE AGENT FOAM SYSTEM
5. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT THE REAR
6. THREE 4" FHU RH-B PIKE POLES; ONE MOUNTED UNDER FRONT BUMPER LID AND TWO SHIP LOOSE
7. TWO 120V 6-PLACE RECEPTACLES LOCATED IN THE CAB PER SHOP ORDER

22FEB24	CDU	J60	CHASSIS DATA
06NOV23	LST	J60	MAKE
30OCT23	LST	J60	PIERCE
13SEP23	LST	J60	MODEL
07JUN23	CDU	CZA	ENFORCER
REV	DATE	BY	CH

Pierce MANUFACTURING INC.

JOB NO. 38173

SCALE 1:24 DATE

TITLE 1500-D-1000P W/10 GAL. FOAM CELL, DELUGE, GENERATOR

FOR TROUTMAN FIRE & RESCUE

TROUTMAN, NORTH CAROLINA

DWG NO. 38173AD-SH1

DRAWN BY LST DATE 22MAY23

CHECKED BY CDU DATE 22MAY23

SHEET SIZE D SHEET NO. 1 OF 2