PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE,FRONT,CUSTOM
19,500 lb TAK-4 Axle

AXLE,REAR
27,000 lb Dana Axle

ENGINE
510 HP Paccar MX13

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
26" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
770 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL
20 Gallon Foam Cell

COMPT,PUMPER,REAR
30.75" FF Rollup Rear Compt

COMPT,PUMPER,LEFT SIDE
152" Rollup Full Height Front & Rear FDLER

COMPT,PUMPER,RIGHT SIDE
152" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Top Mount

PUMP
2000 GPM Waterous CSU

CROSSLAYS,1.50"
1.50" Crosslays Not Required

CROSSLAYS,2.50"
2.50" Crosslay Not Required


SPEEDLAYS
(2) 1.50" Std. Capacity


GENERATOR
Generator Not Required


FOAM SYSTEM
Husky 3 Single Agent Foam System


SAFETY

Side Roll and Frontal Impact Protection

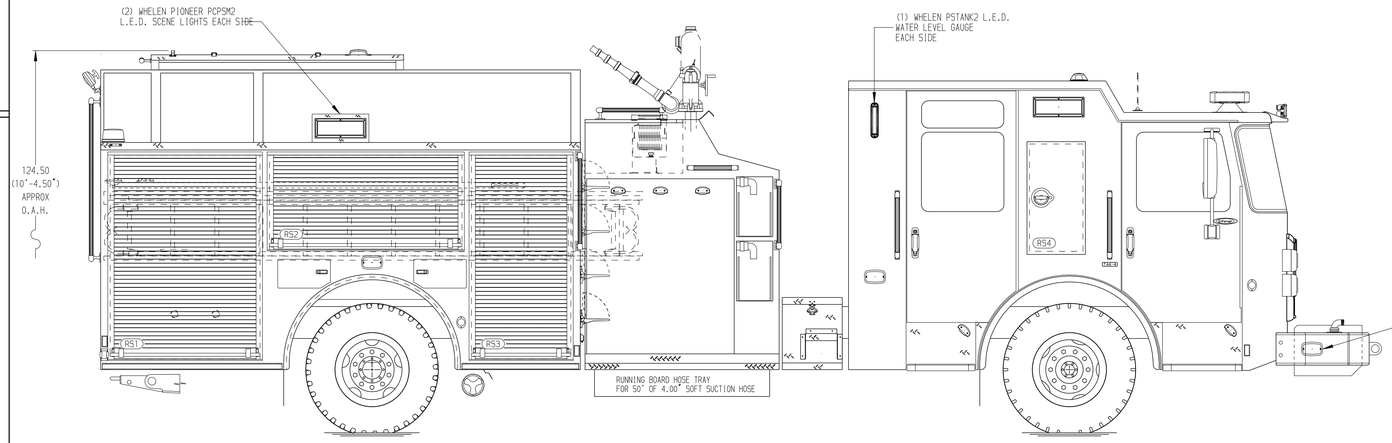

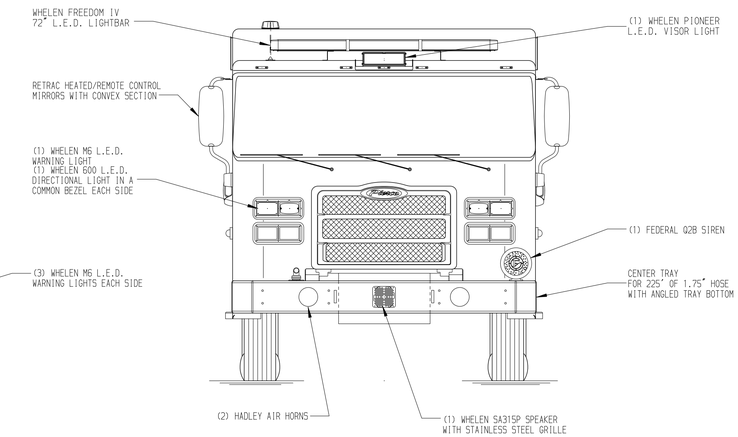


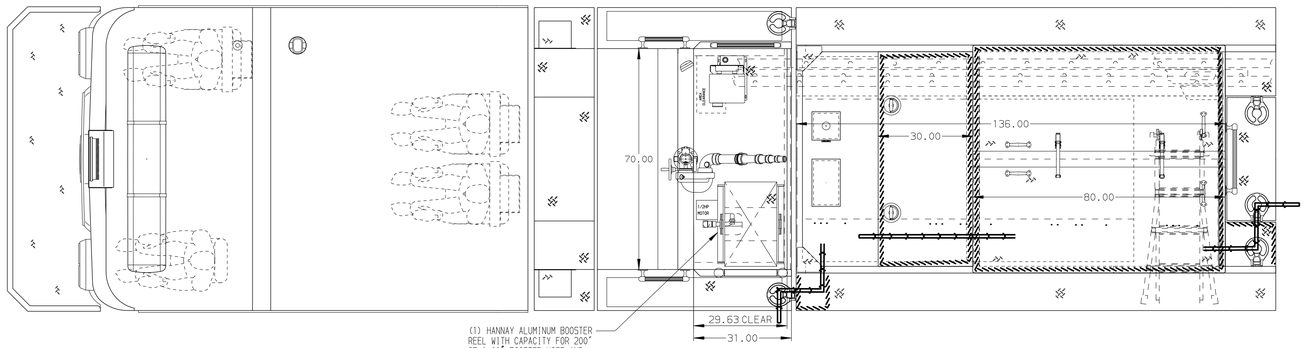

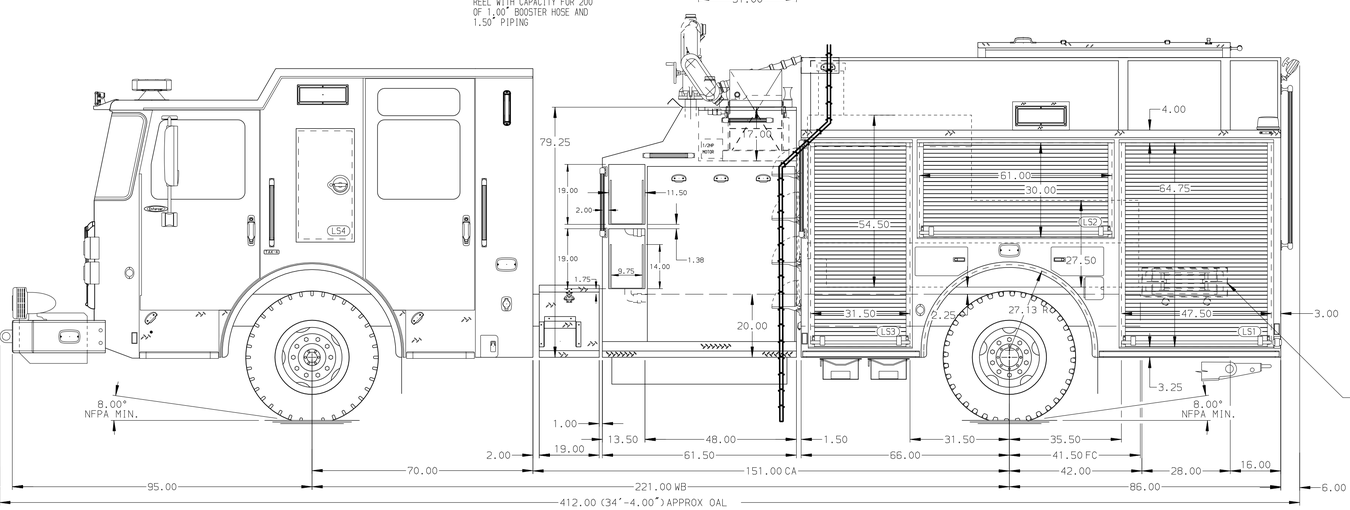

HOSEBED CAPACITIES

1. 500' OF 2.50" D.J. POLY HOSE
2. 300' OF 1.75" D.J. POLY HOSE
3. 600' OF 5.00" D.J. POLY HOSE
4. 600' OF 5.00" D.J. POLY HOSE
5. STANDPIPE BUNDLE STORAGE

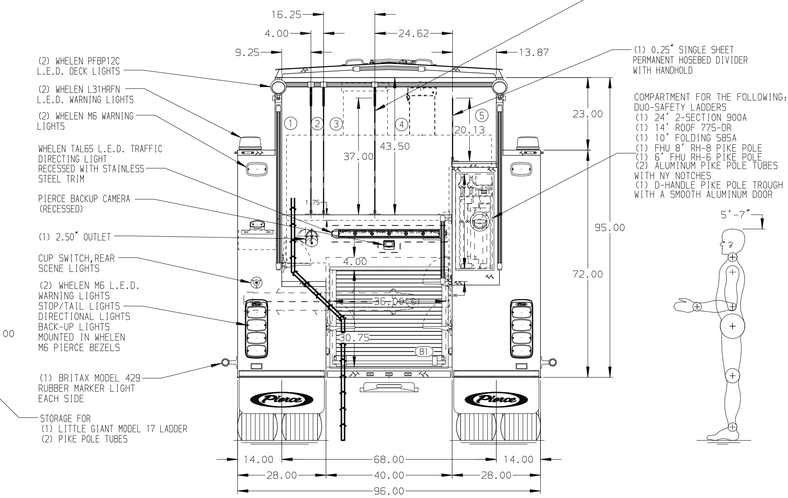

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT PER ORDER
2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. STORAGE RACK FOR TWO SCBA BOTTLES IN COMPARTMENT PER ORDER
4. FIVE FULL WIDTH/DEPTH ADJUSTABLE SHELVES IN COMPARTMENTS PER ORDER
5. ONE FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER ORDER
6. ONE SWING-OUT TOOLBOARD IN COMPARTMENT PER ORDER
7. L.E.D. LIGHT STICKS LOCATED IN THE CARGO AREA
8. ONE 120V 7-PLACE RECEPTACLE STRIP MOUNTED IN CAB PER SHOP ORDER

REV	DATE	BY	CH
V	23MAR26	DLH	
V	12FEB26	BTH	MCJ

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE	Pierce Pumper Approval Drawing	JOB NO.	42009 01-02
FOR	Broken Arrow MCJ	SCALE	1:24
DWG NO.	42009AD	DRAWN BY	DLH
		DATE	15DEC25
		CHECKED BY	MMF
		DATE	15DEC25
		SHEET SIZE	D
		SHEET NO.	1 OF 1

View File Created 27-MAR-2026 12:19:28