PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
Hard Wired

CHASSIS

AXLE, FRONT, CUSTOM
20,000 Lb Dana Axle

AXLE, REAR
27,000 Lb Dana Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
ALLison 6th Gen, 3000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
750 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL CAPACITY
Foam Cell Not Required

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
152" Rollup Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
152" Rollup Low FDLER

FIRE SUPPRESSION

PUMPHOUSE
45" Control Zone Side Mount

PUMP
1500 GPM Hale QMAX

CROSSLAYS, 1.50"
(3) 1.50" Special Capacity


CROSSLAYS, 2.50"
2.50" Crosslay Not Required


SPEEDLAYS
Speedlays Not Required


GENERATOR
Generator Not Required

FOAM SYSTEM
Foam System Not Required


SAFETY

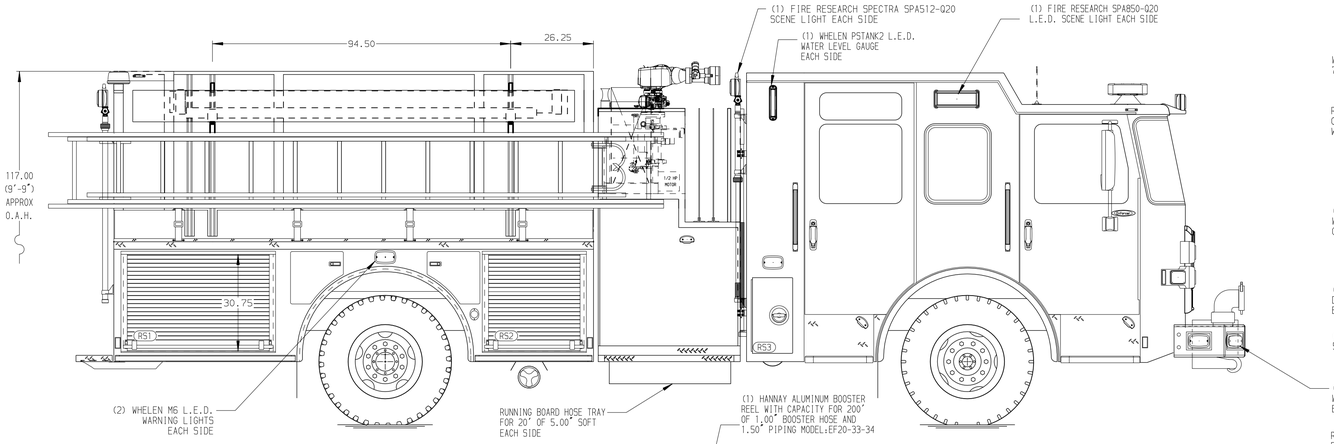

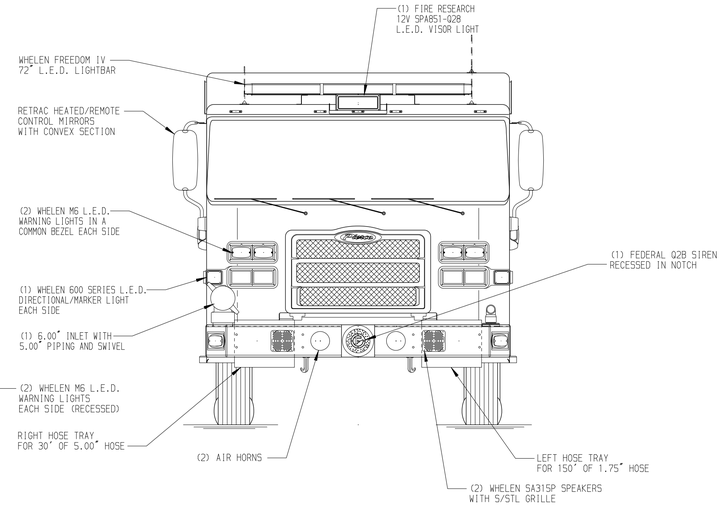

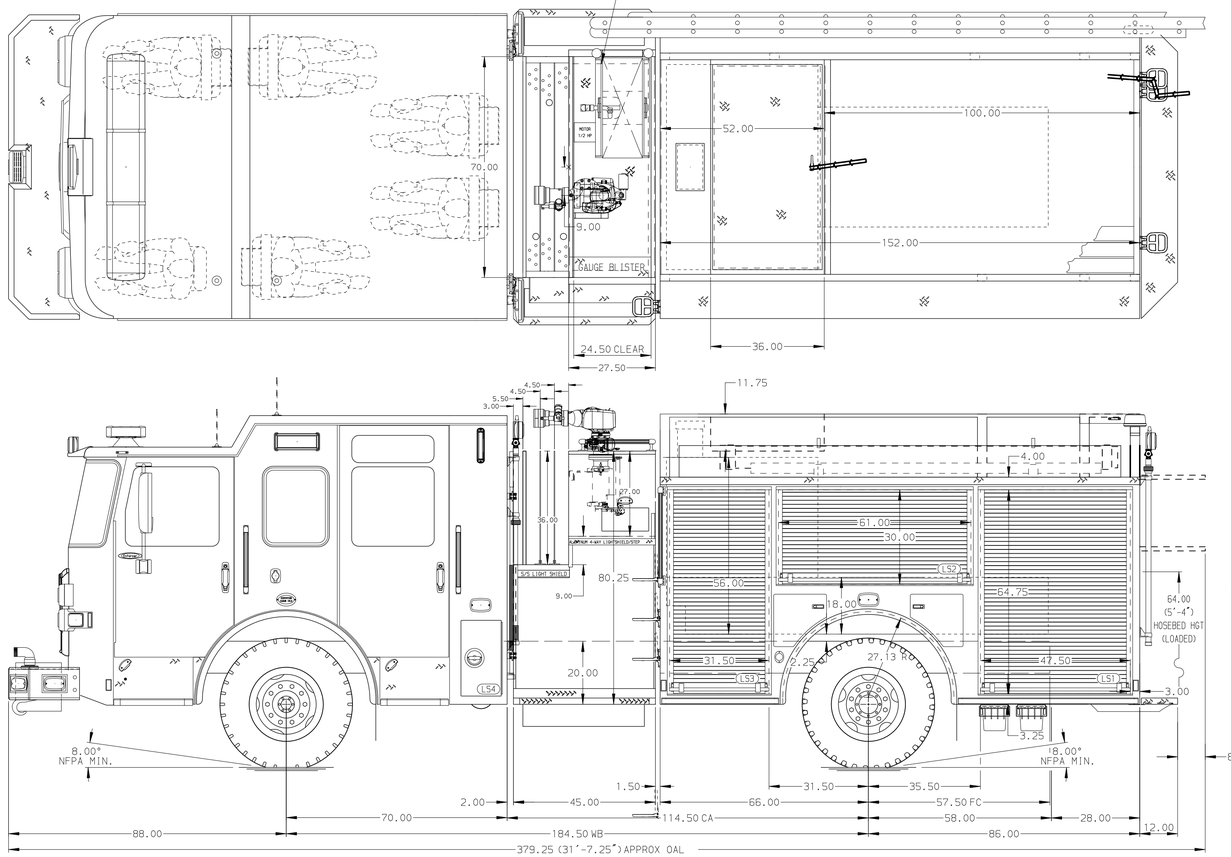

HOSEBED CAPACITIES
1. 400' OF 2.50" D.J. POLY HOSE
2. 400' OF 2.50" D.J. POLY HOSE
3. 600' OF 3.00" D.J. POLY HOSE
4. 2000' OF 5.00" D.J. POLY HOSE

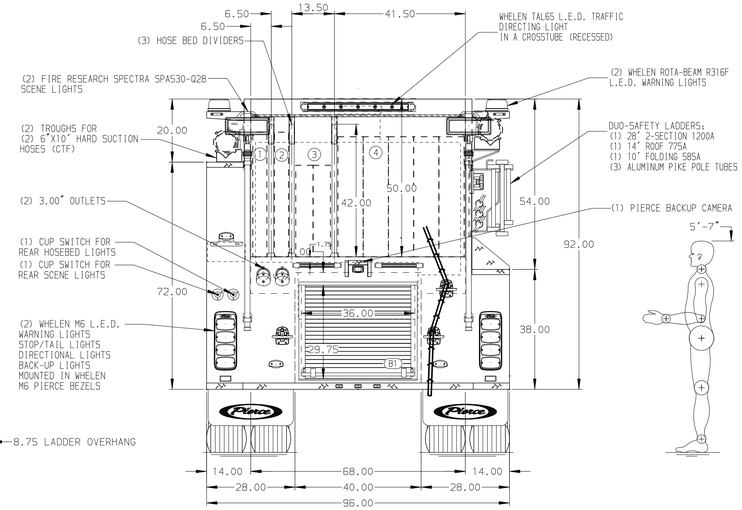

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 2.50 OUTLET WITH 2.50 PIPING AND SWIVEL LOCATED ON TOP OF LEFT BUMPER
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
6. TWO ADJUSTABLE SHELVES LOCATED PER ORDER
7. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
8. THREE SLIDE-OUT TRAYS LOCATED PER ORDER
9. THREE PAC TRACS LOCATED PER ORDER

REV	DATE	BY	CH
1	06MAR26	KLE	COS
2	16JAN26	JAM	COS

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
FOR: Township of Haverford
DWG NO.: 42069AD

JOB NO.	42069
SCALE	1:24
DATE	
DRAWN BY	JAM
DATE	09DEC25
CHECKED BY	MMF
DATE	11DEC25
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 06-MAR-2026 12:15:41