

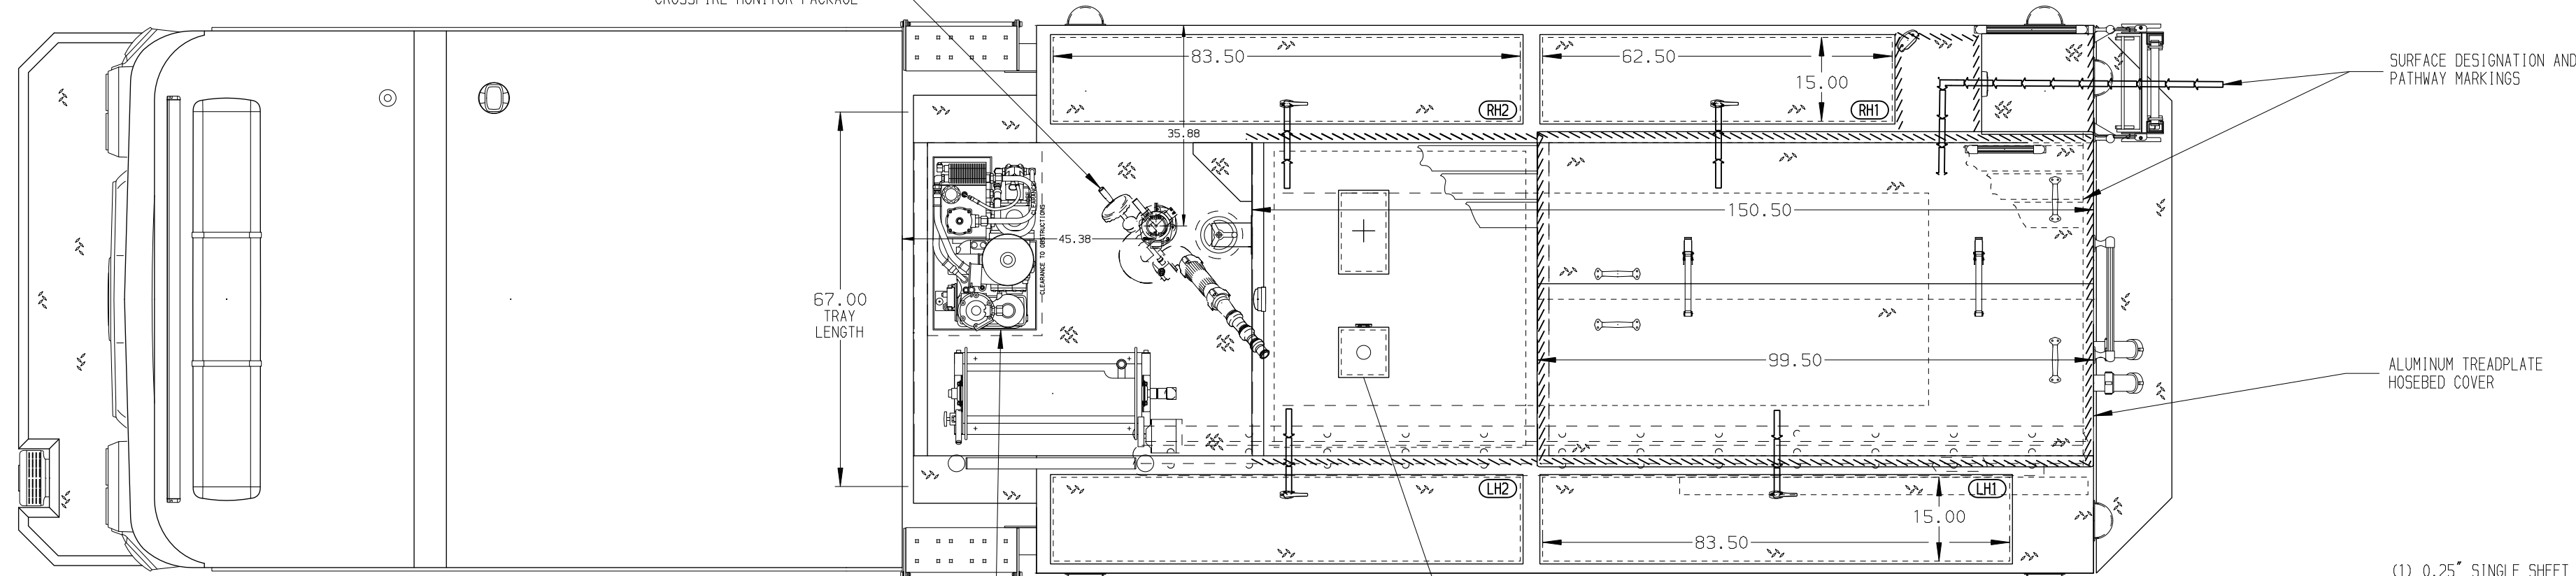
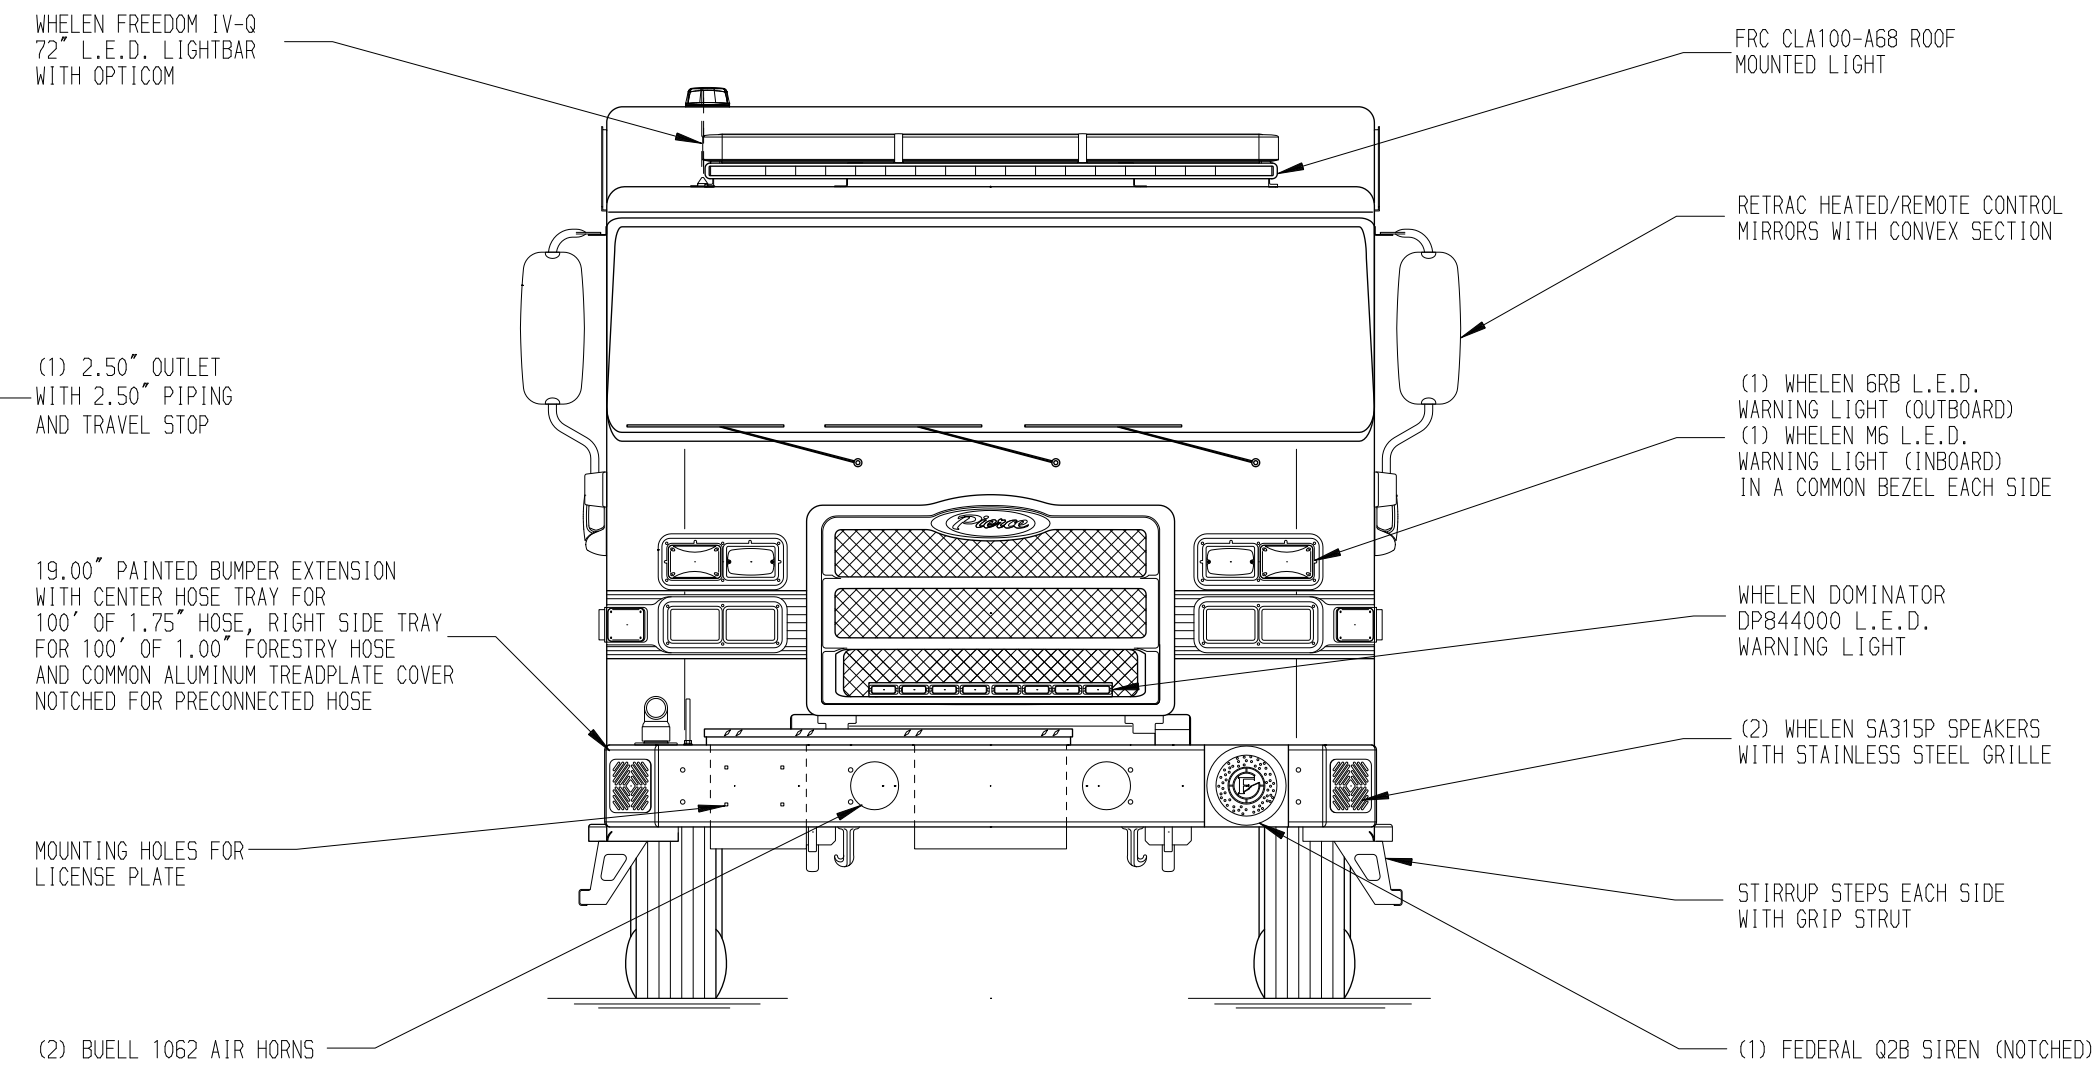
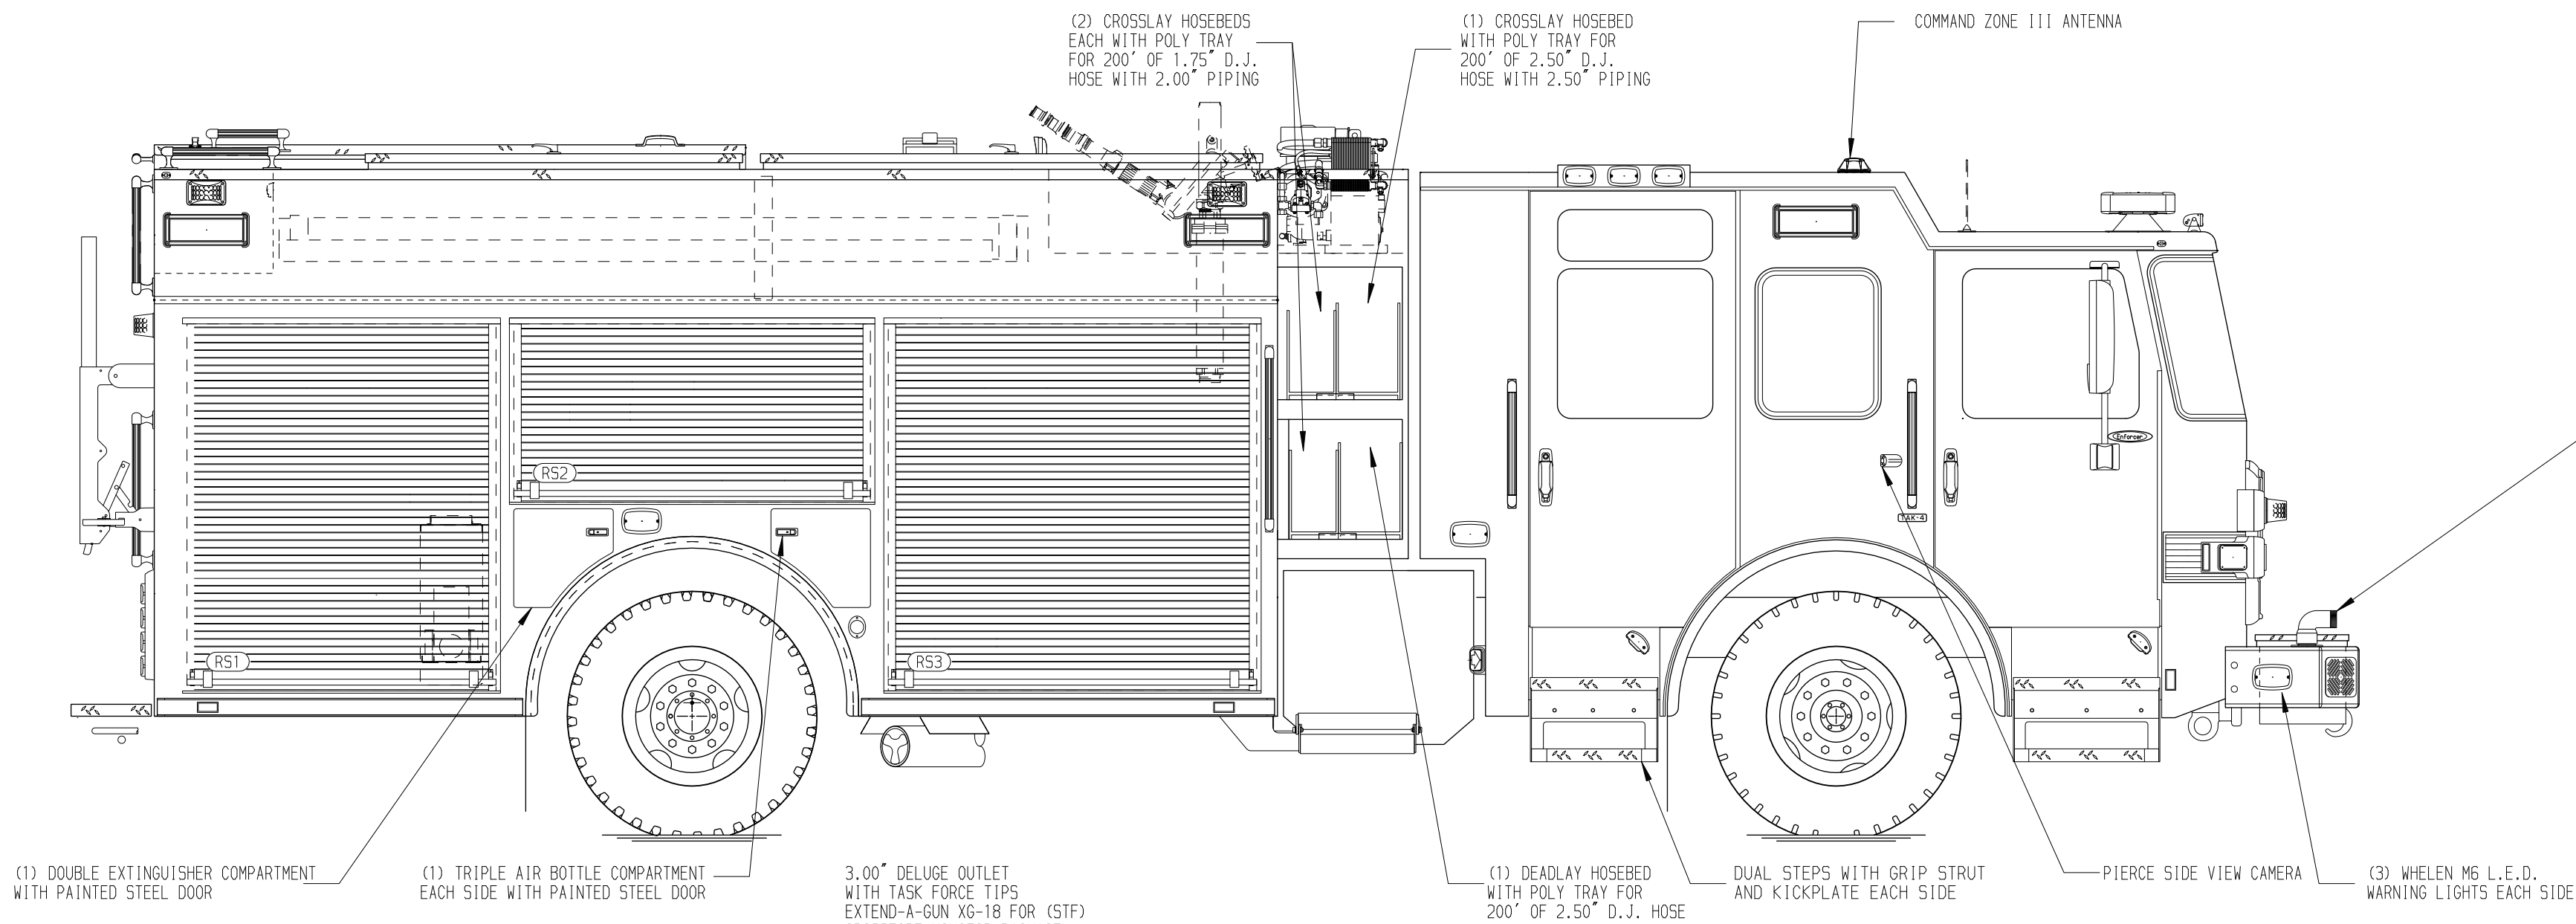


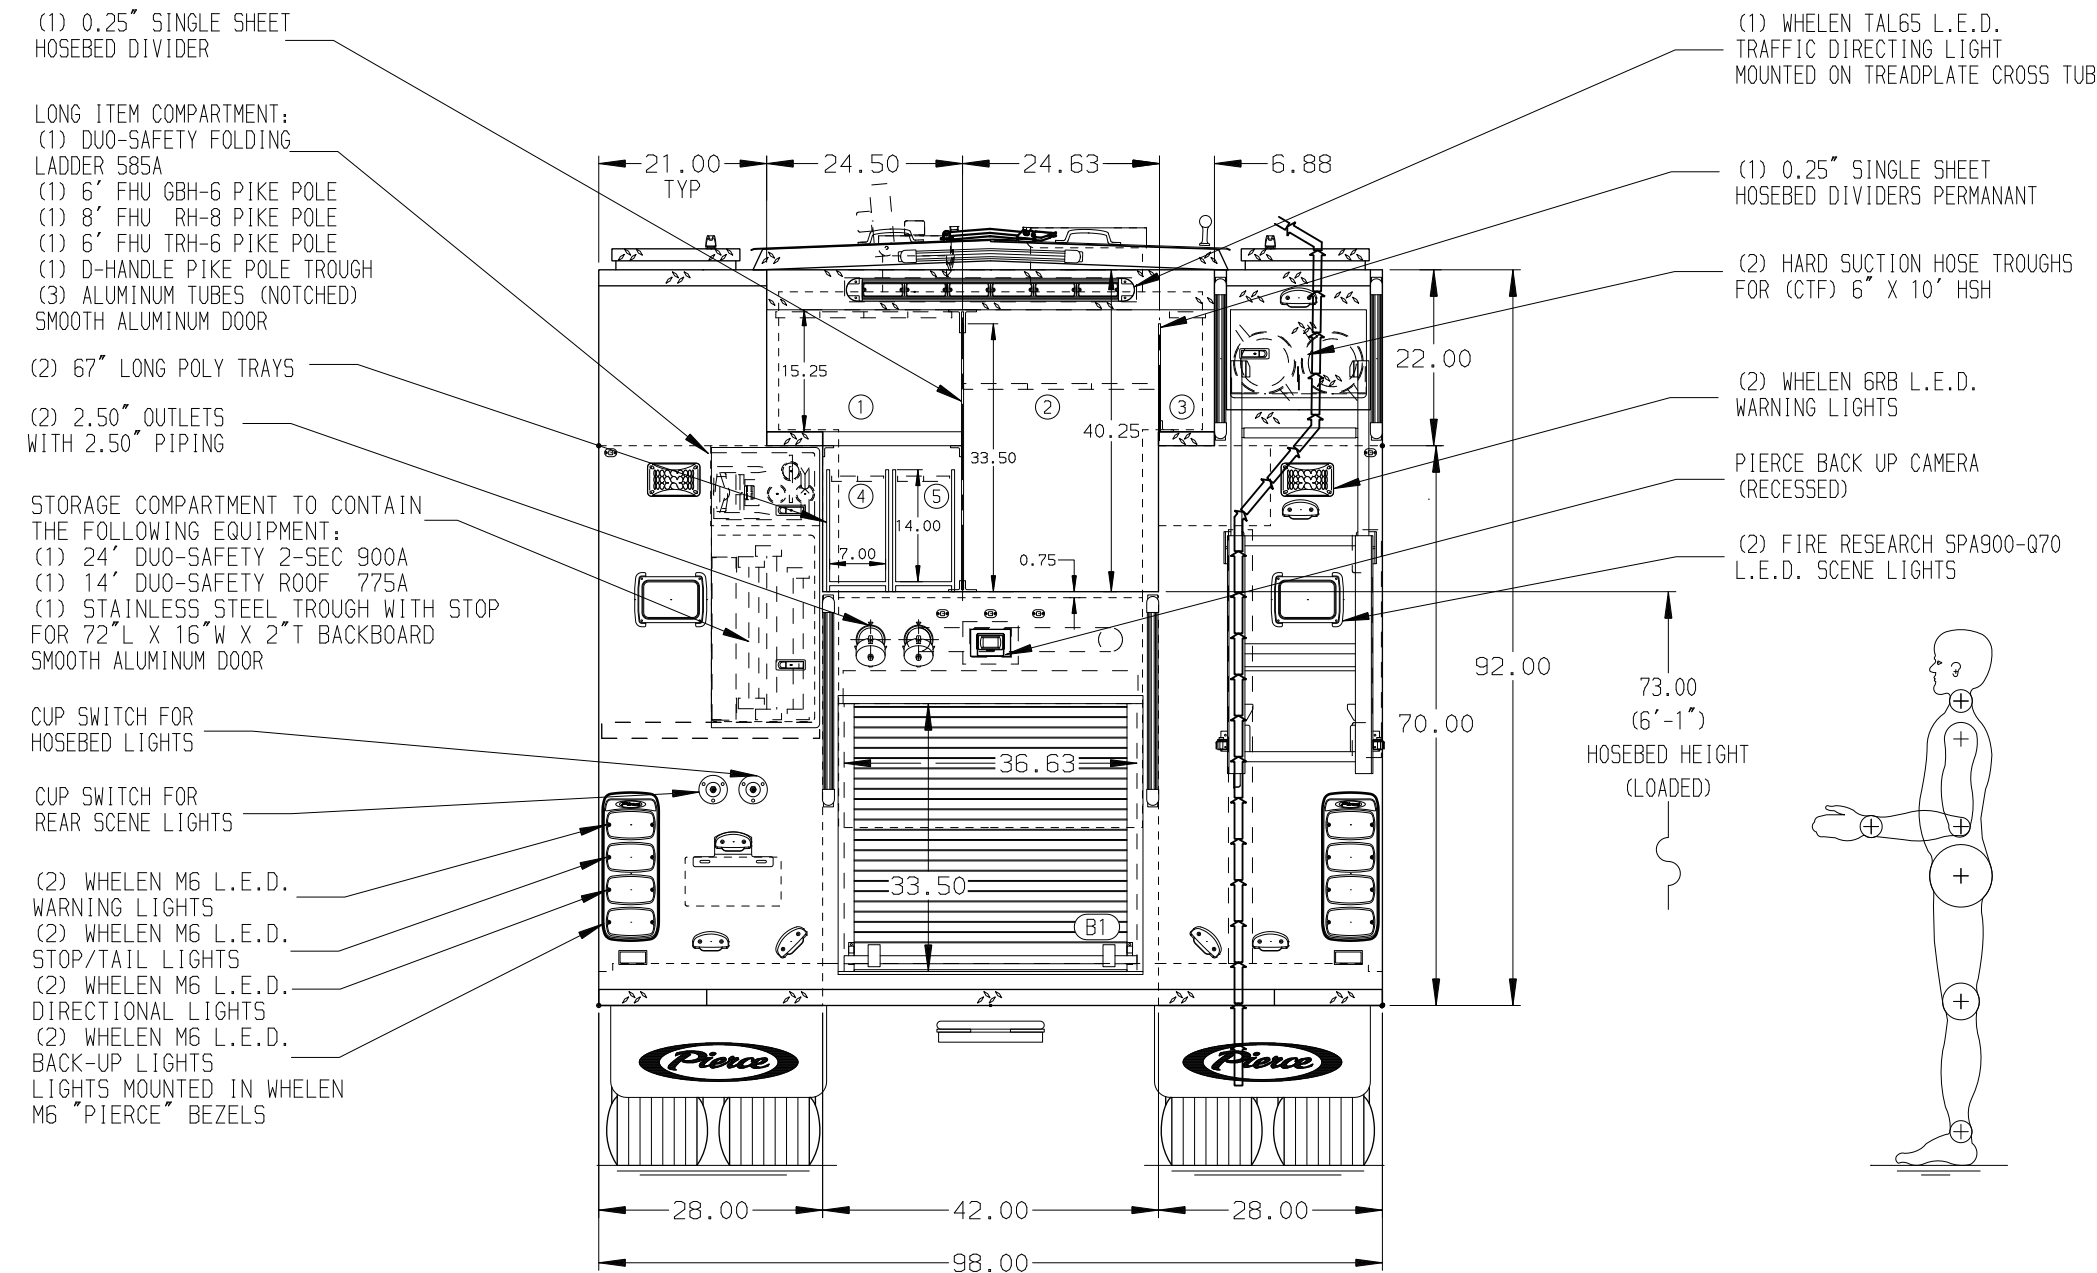

- HOSEBED CAPACITIES
- ① - 600' OF 3.00" D.J. POLY HOSE
 - ② - 800' OF 5.00" D.J. POLY HOSE
 - ③ - 150' OF 2.50" D.J. POLY HOSE
 - ④ - 200' OF 1.75" D.J. POLY HOSE (IN TRAY)
 - ⑤ - 200' OF 1.75" D.J. POLY HOSE (IN TRAY)

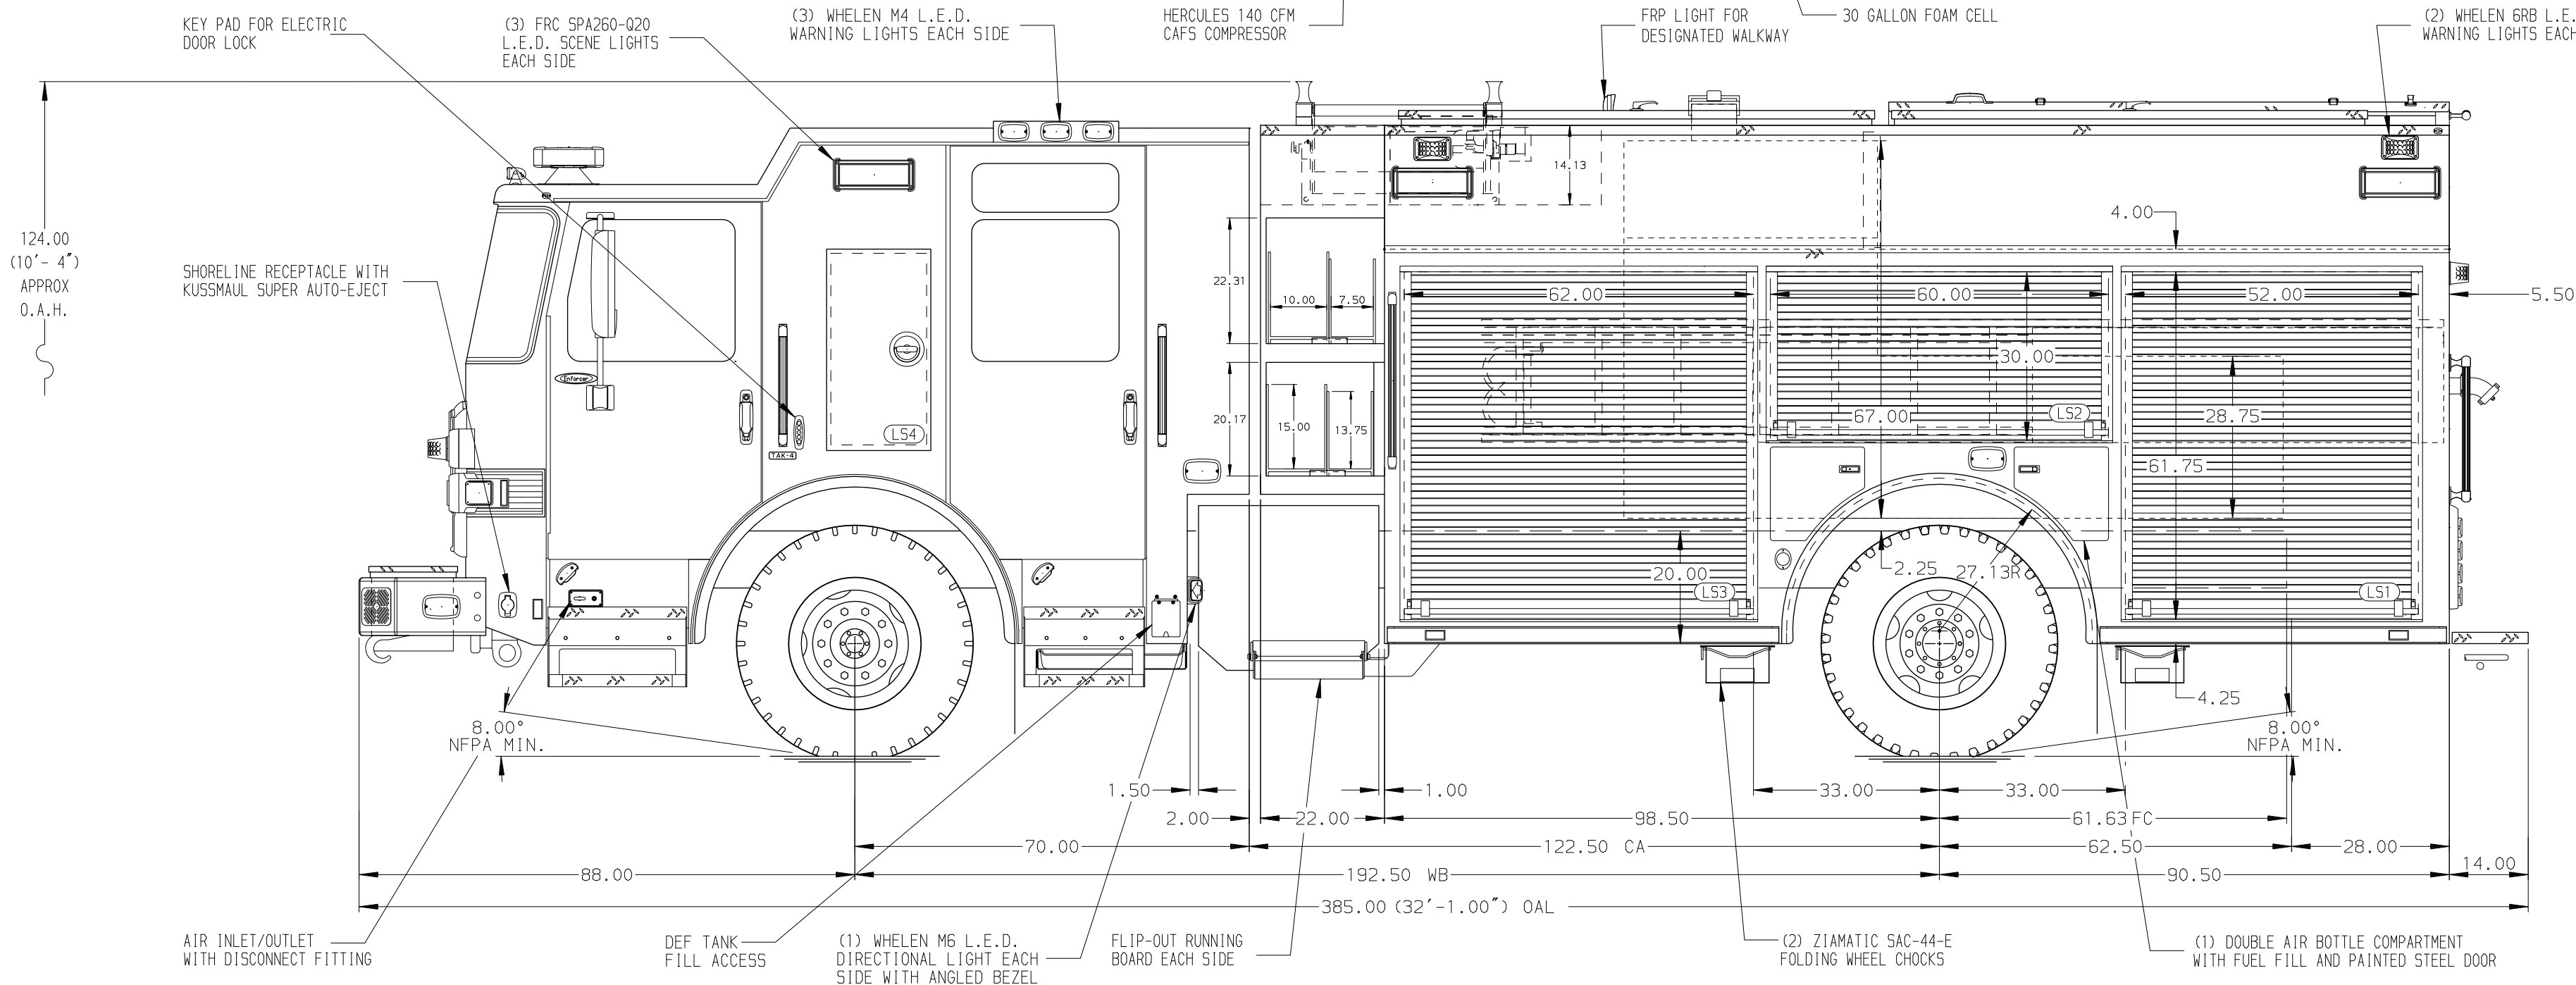

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED ON DRIVER'S SIDE EMS COMPARTMENT
- BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- ONE OIL DRY HOPPER MOUNTED ON FLOOR TRAY LOCATED PER SHOP ORDER
- HANNAY BOOSTER REEL MODEL EF4138-17-18 WITH 1/3 HP MOTOR AND 100' OF 0.75" BOOSTER HOSE (CAPACITY FOR 100' OF 1.00" HOSE) LOCATED IN CARGO AREA
- GAST SHCD-10-M550X AIR COMPRESSOR LOCATED IN FORWARD LH2 HATCH COMPARTMENT

REV	DATE	BY	CH	ENFORCER
1	19SEP24	JJB	CHR	
2	24JUN24	JJB	CHR	
3	16MAY24	JJB	CHR	
4	21MAR24	JJB	WKL	

Pierce MANUFACTURING INC.		JOB NO.	38771
		SCALE	1:24
		DATE	
		DRAWN BY	JJB
		18MAR24	
		CHECKED BY	WKL
		18MAR24	
		SHEET SIZE	D
		SHEET NO.	1 OF 1



TITLE 1500 GPM, 750G TANK, 720G WATER, 30G FOAM
189" RESCUE PUC, MUX

FOR ROUND ROCK FIRE DEPARTMENT
ROUND ROCK, TEXAS

DWG NO. 38771 AD