

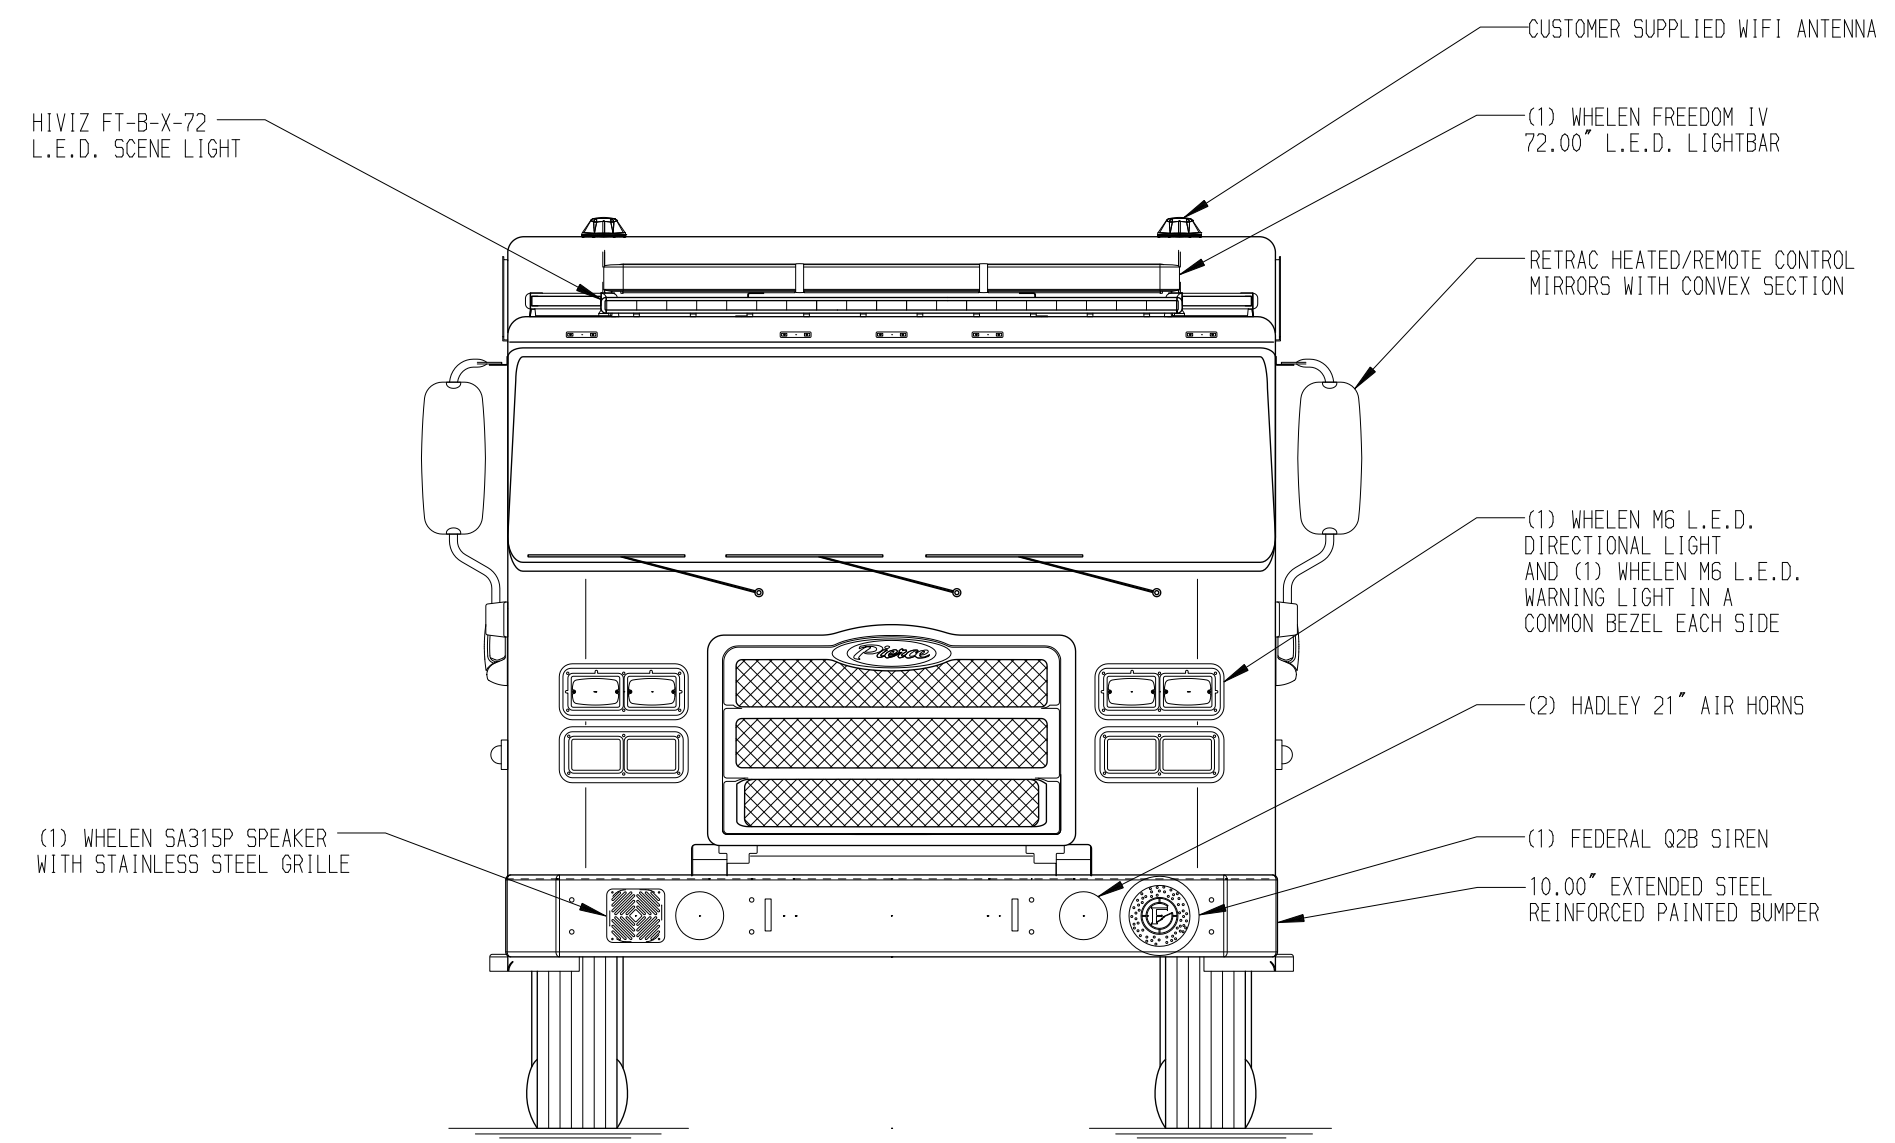


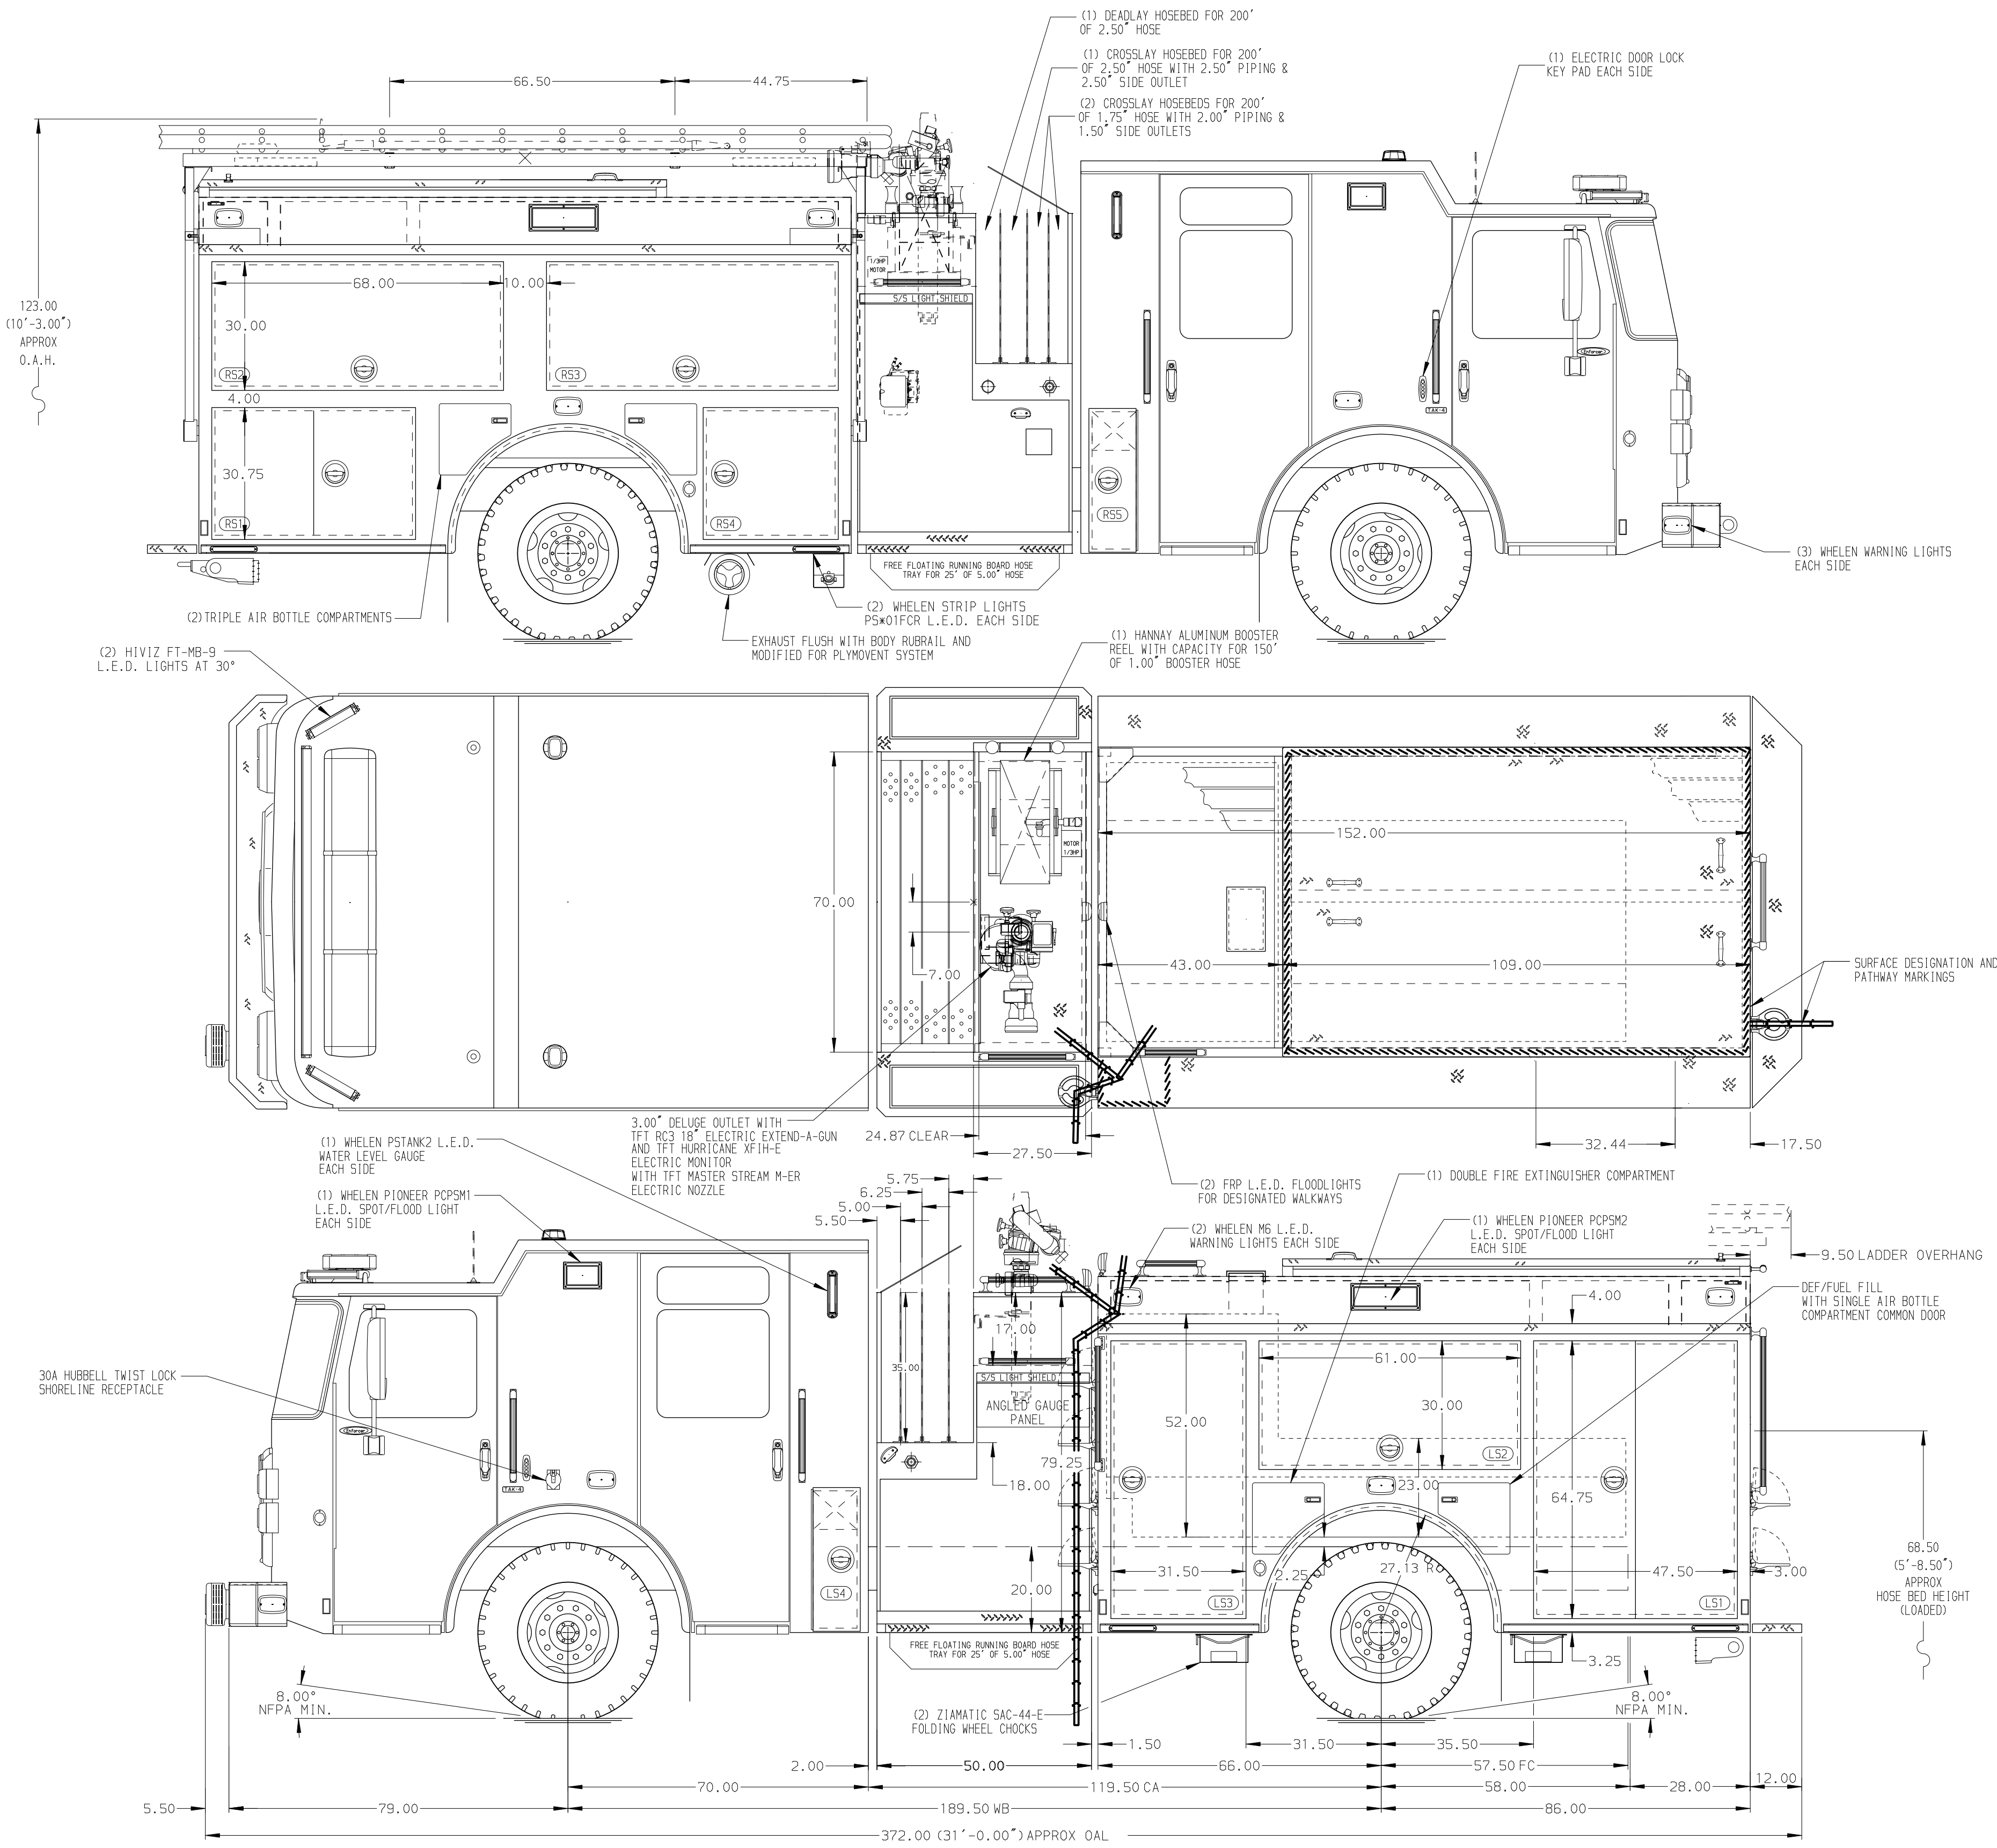

- HOSEBED CAPACITIES
- 1 400' OF 2.50" D.J. POLY HOSE
 - 2 200' OF 2.50" D.J. POLY HOSE
 - 3 150' OF 2.50" D.J. POLY HOSE (TOP)
 - 4 200' OF 2.50" D.J. POLY HOSE
 - 5 200' OF 1.75" D.J. POLY HOSE (TOP)
 - 6 200' OF 1.75" D.J. POLY HOSE
 - 7 200' OF 1.75" D.J. POLY HOSE (TOP)
 - 8 800' OF 5.00" D.J. POLY HOSE

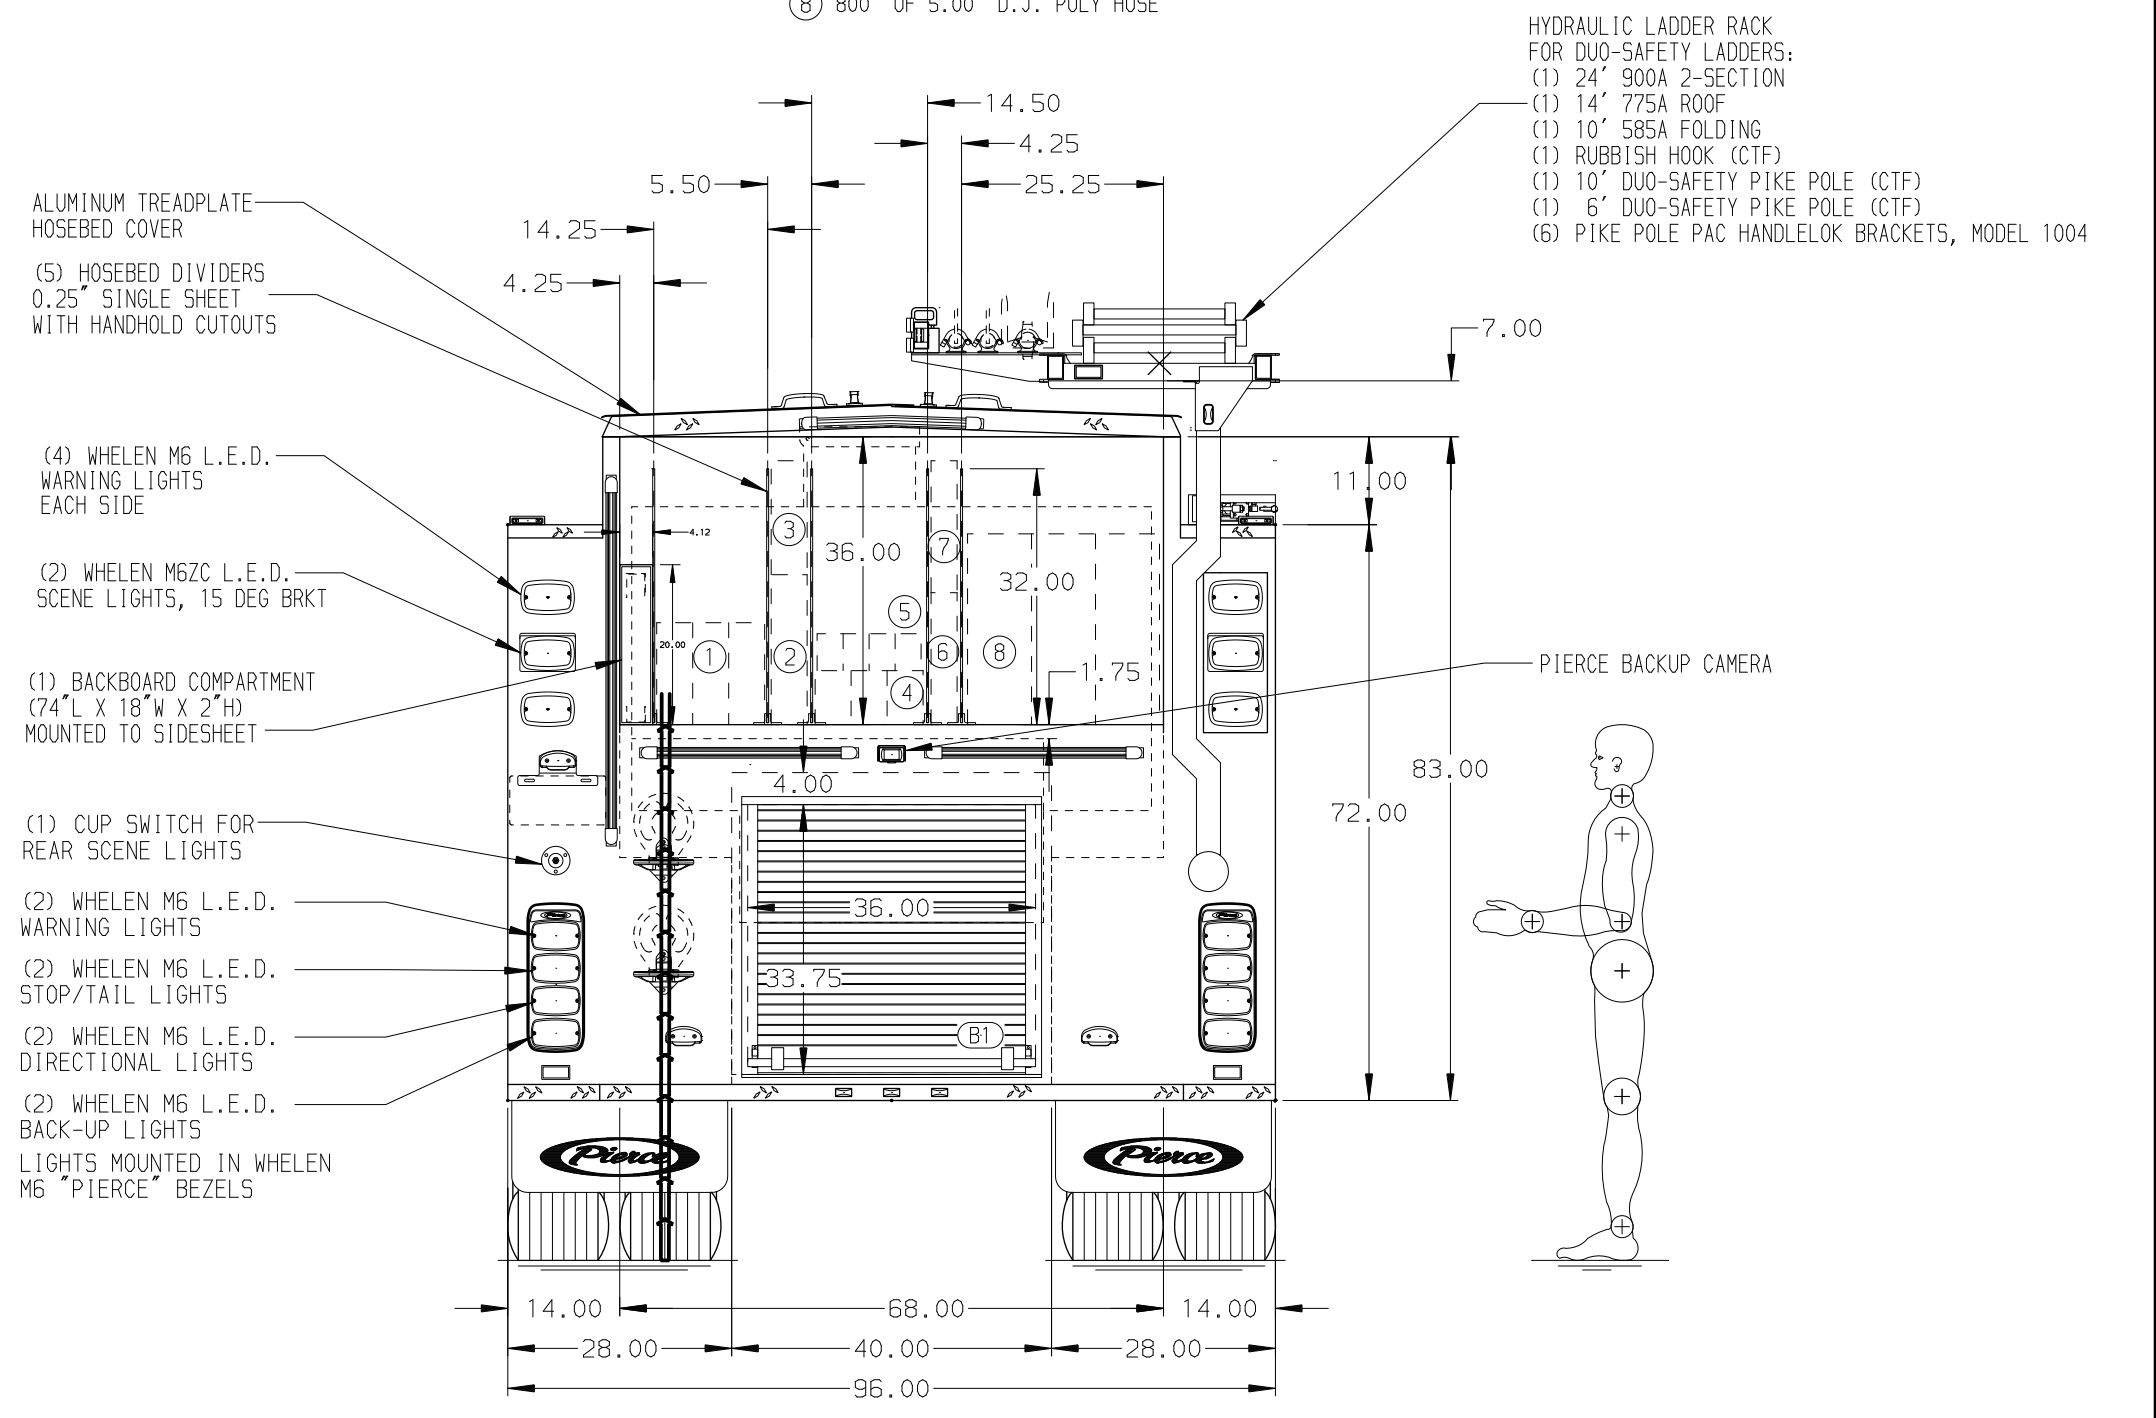

ALUMINUM BODY SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. BATTERY CHARGER LOCATED IN COMPARTMENT LS3
- 2. BATTERY CHARGER INDICATOR LOCATED ON THE DRIVER'S SEAT RISER

28JAN25	BTH	GKH	CHASSIS
06DEC24	BTH	GKH	DATA
20AUG24	BTH	GKH	MAKE
25JUL24	BTH	GKH	PIERCE
09MAY24	JAM	SJS	MODEL
REV	DATE	BY	CH ENFORCER

 MANUFACTURING INC.		JOB NO.	38816	
		SCALE 1:24	DATE	
TITLE	1500GPM, 750G WATER TANK 152" PUMPER, MUX		DRAWN BY BTH	01MAY24
FOR	ORTING VALLEY FIRE AND RESCUE ORTING, WASHINGTON		CHECKED BY SJS	01MAY24
DWG NO.	38816AD		SHEET SIZE D	SHEET NO. 1 OF 1