

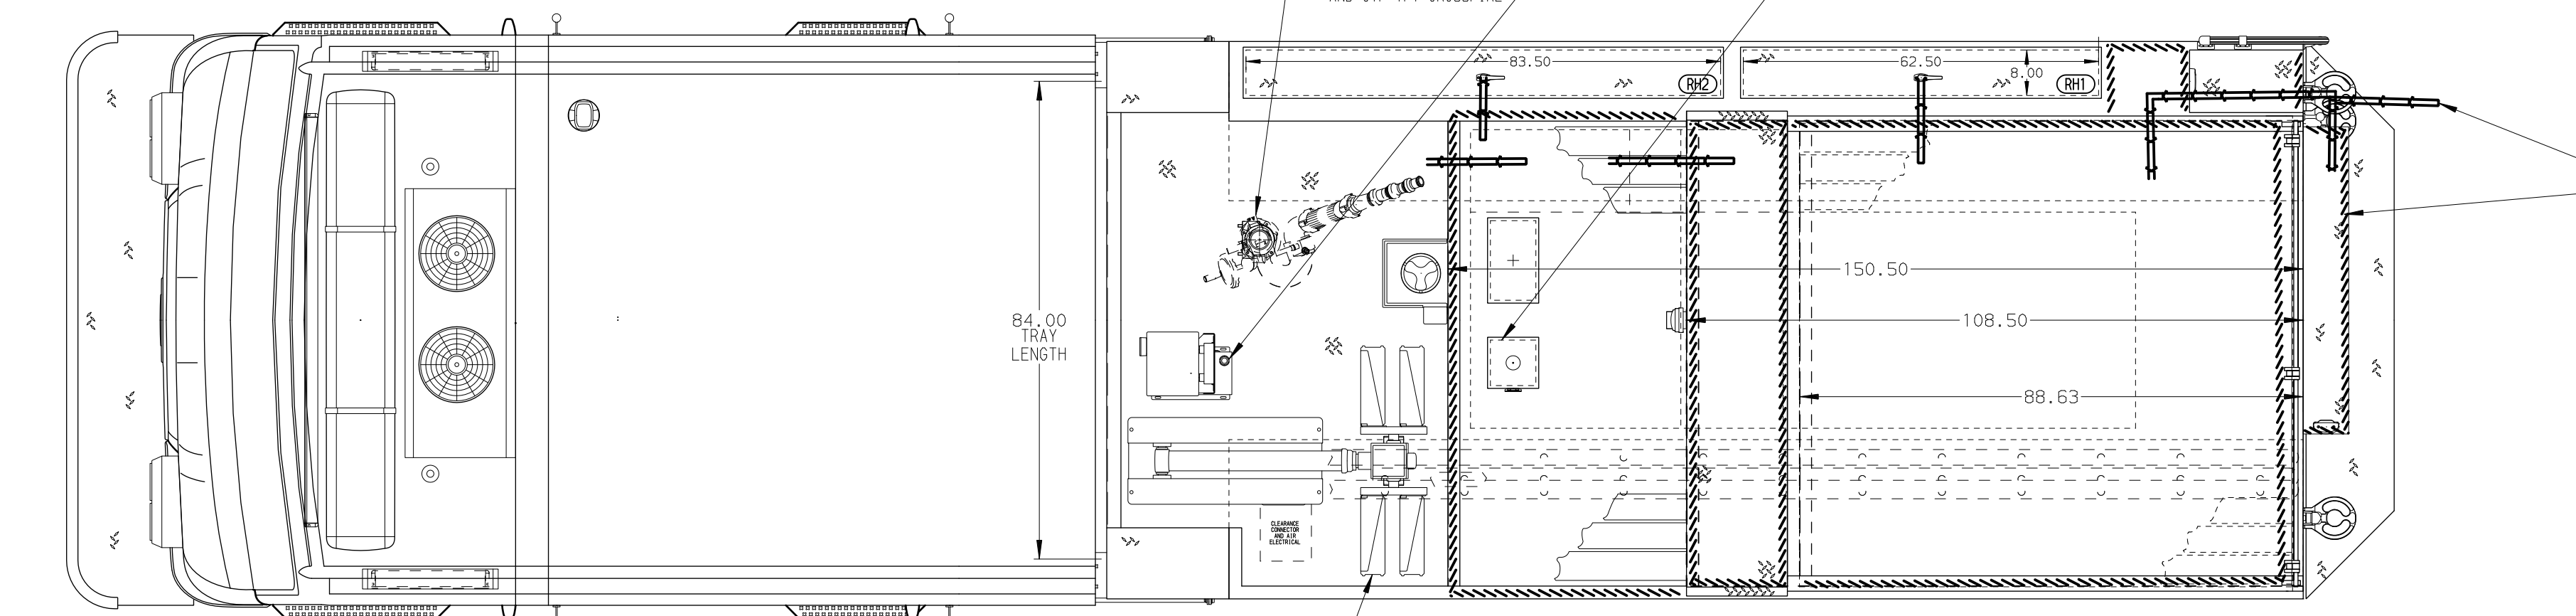
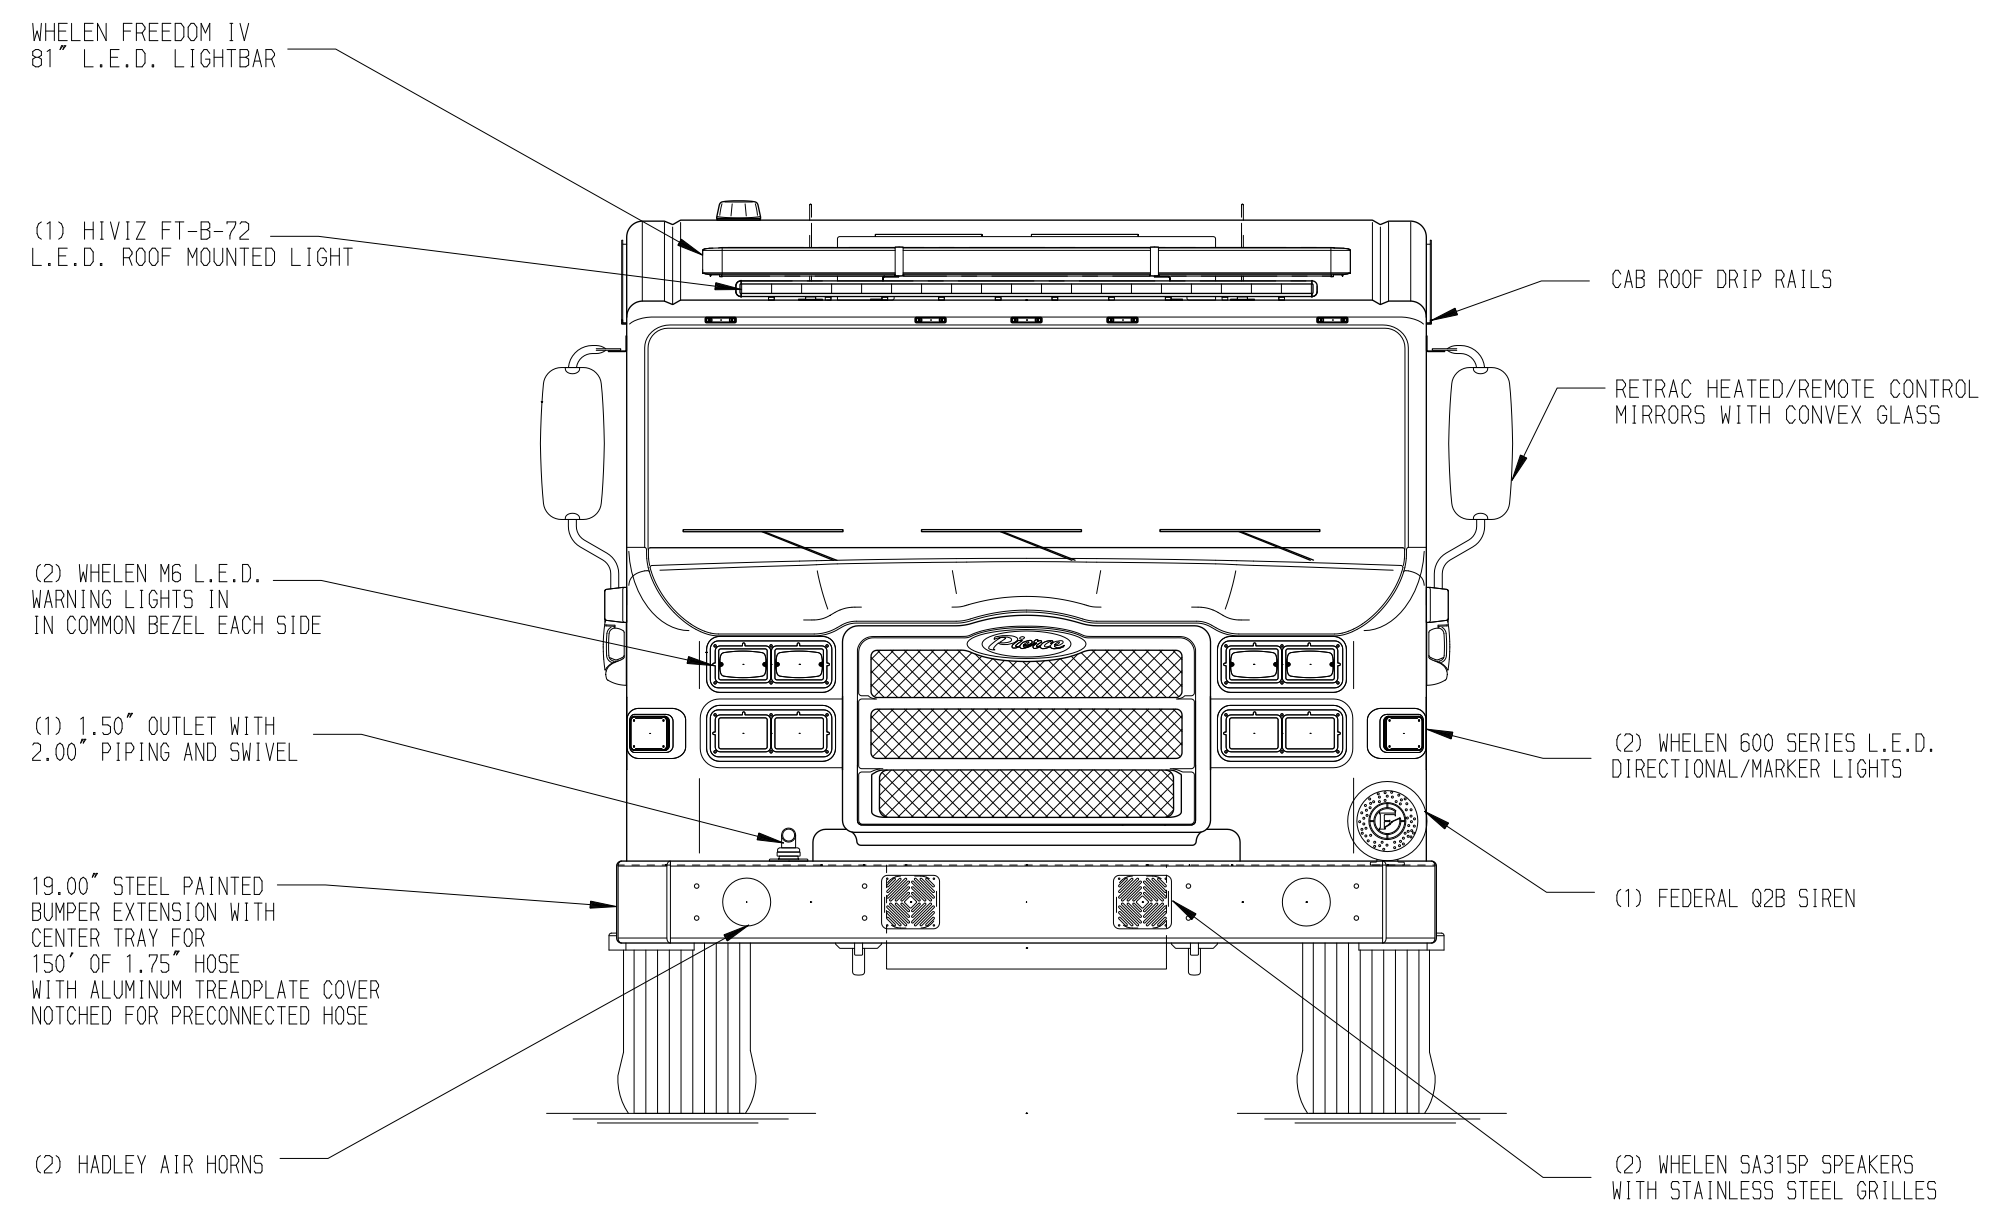
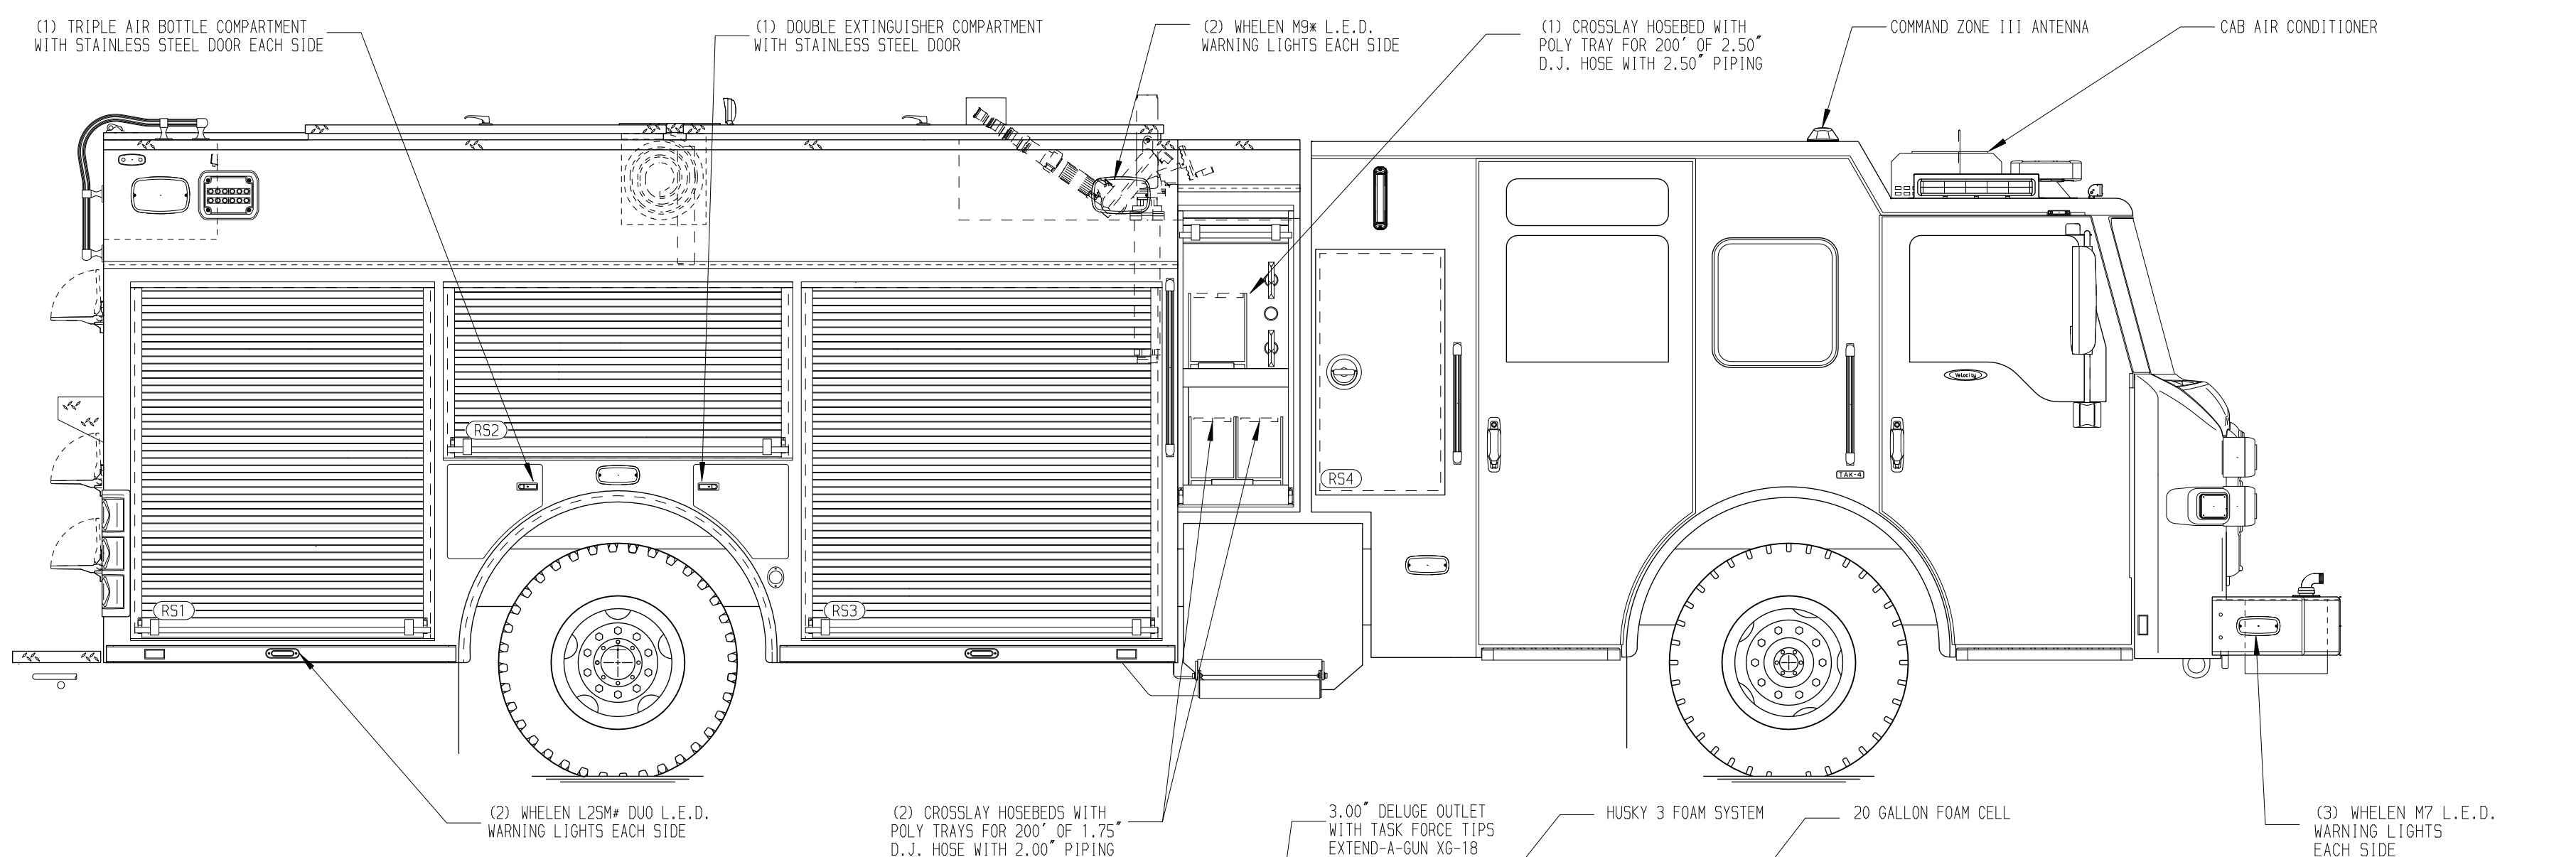


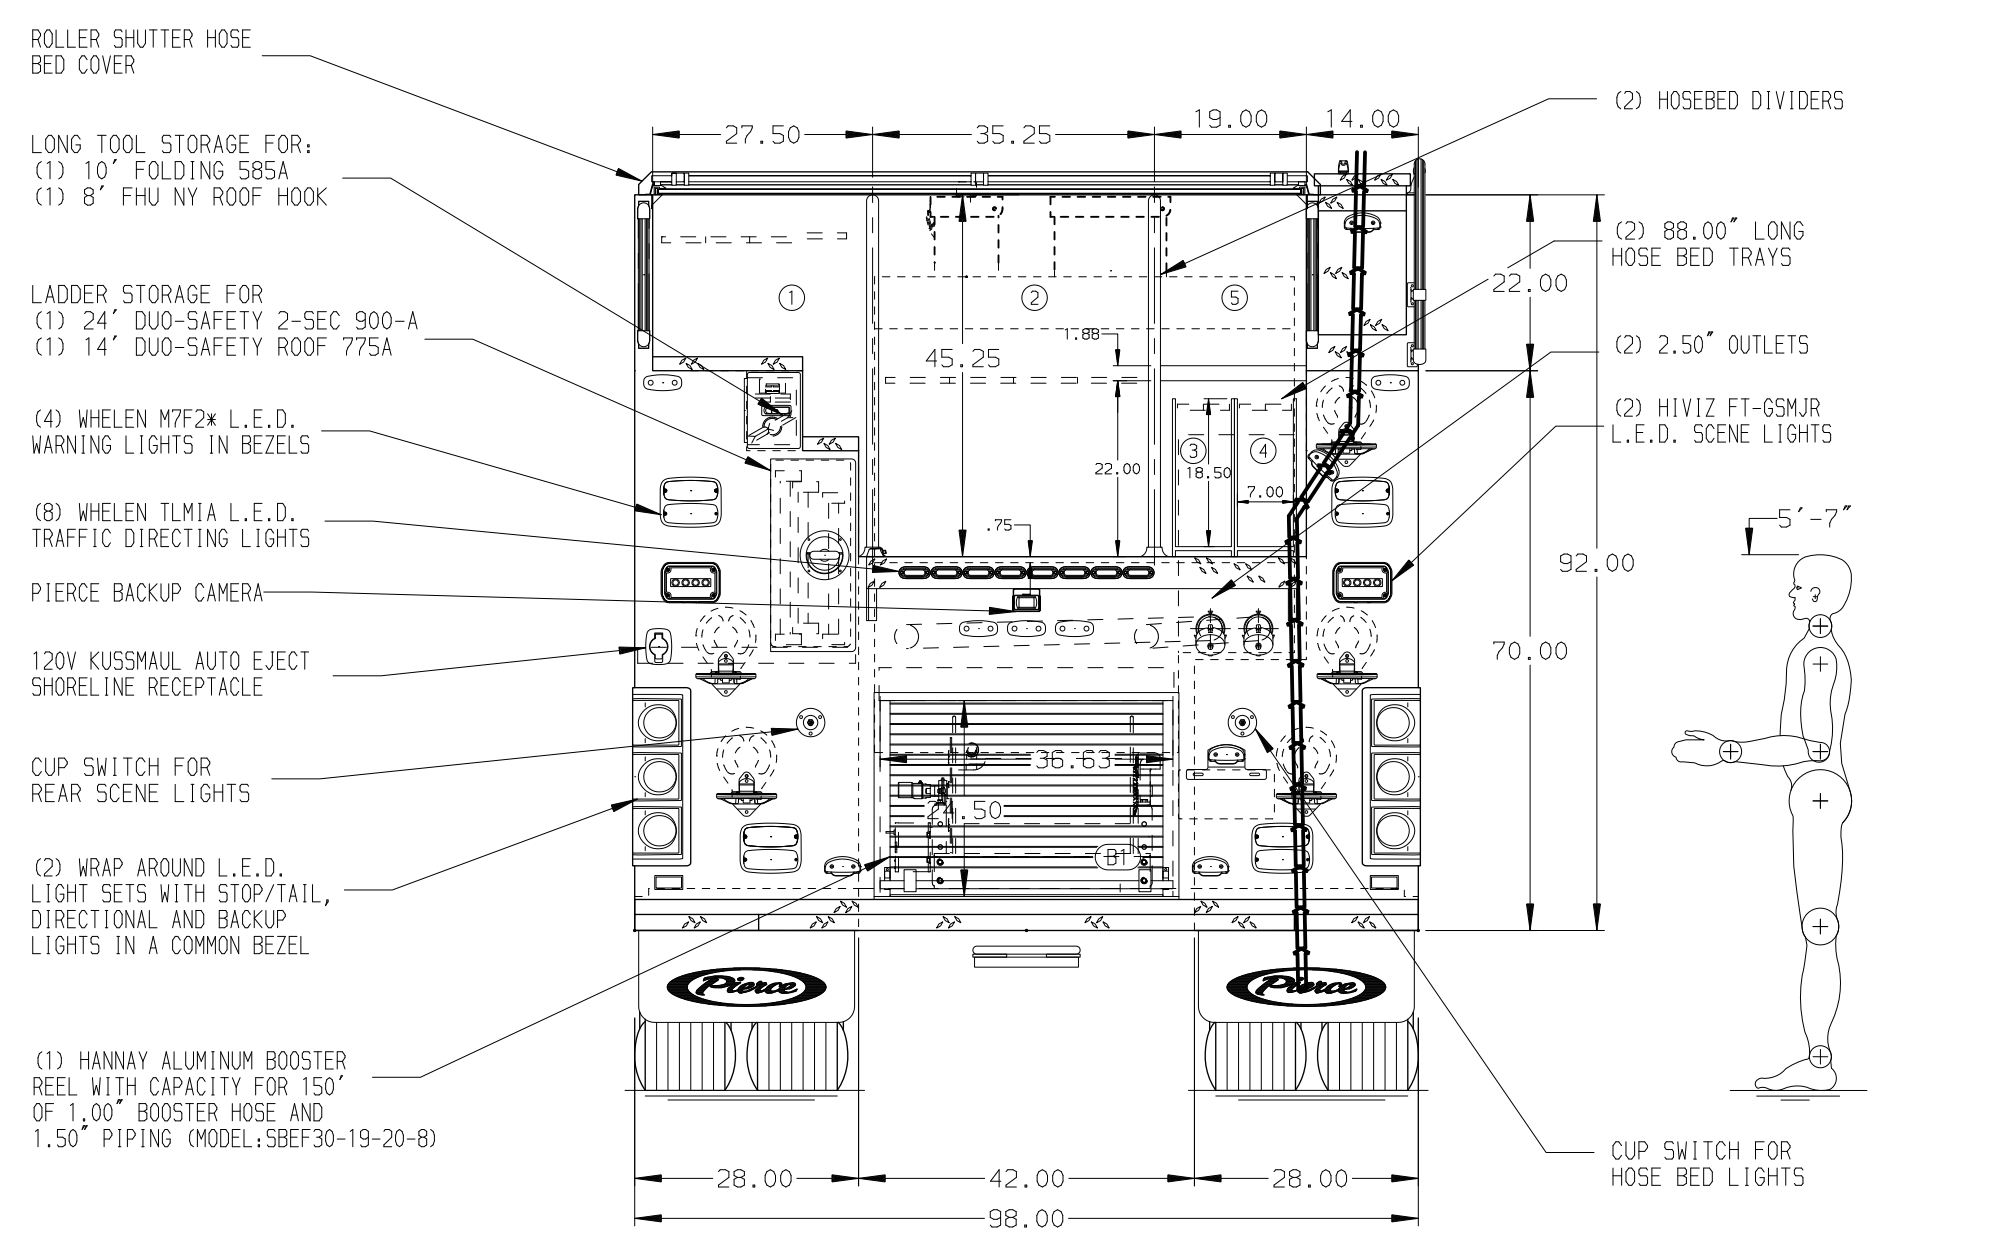

- HOSEBED CAPACITIES
- ① - 600' OF 3.00" D.J. POLY HOSE
 - ② - 800' OF 5.00" D.J. POLY HOSE
 - ③ - 350' OF 1.75" D.J. POLY HOSE IN TRAY
 - ④ - 350' OF 1.75" D.J. POLY HOSE IN TRAY
 - ⑤ - OPEN HOSE BED

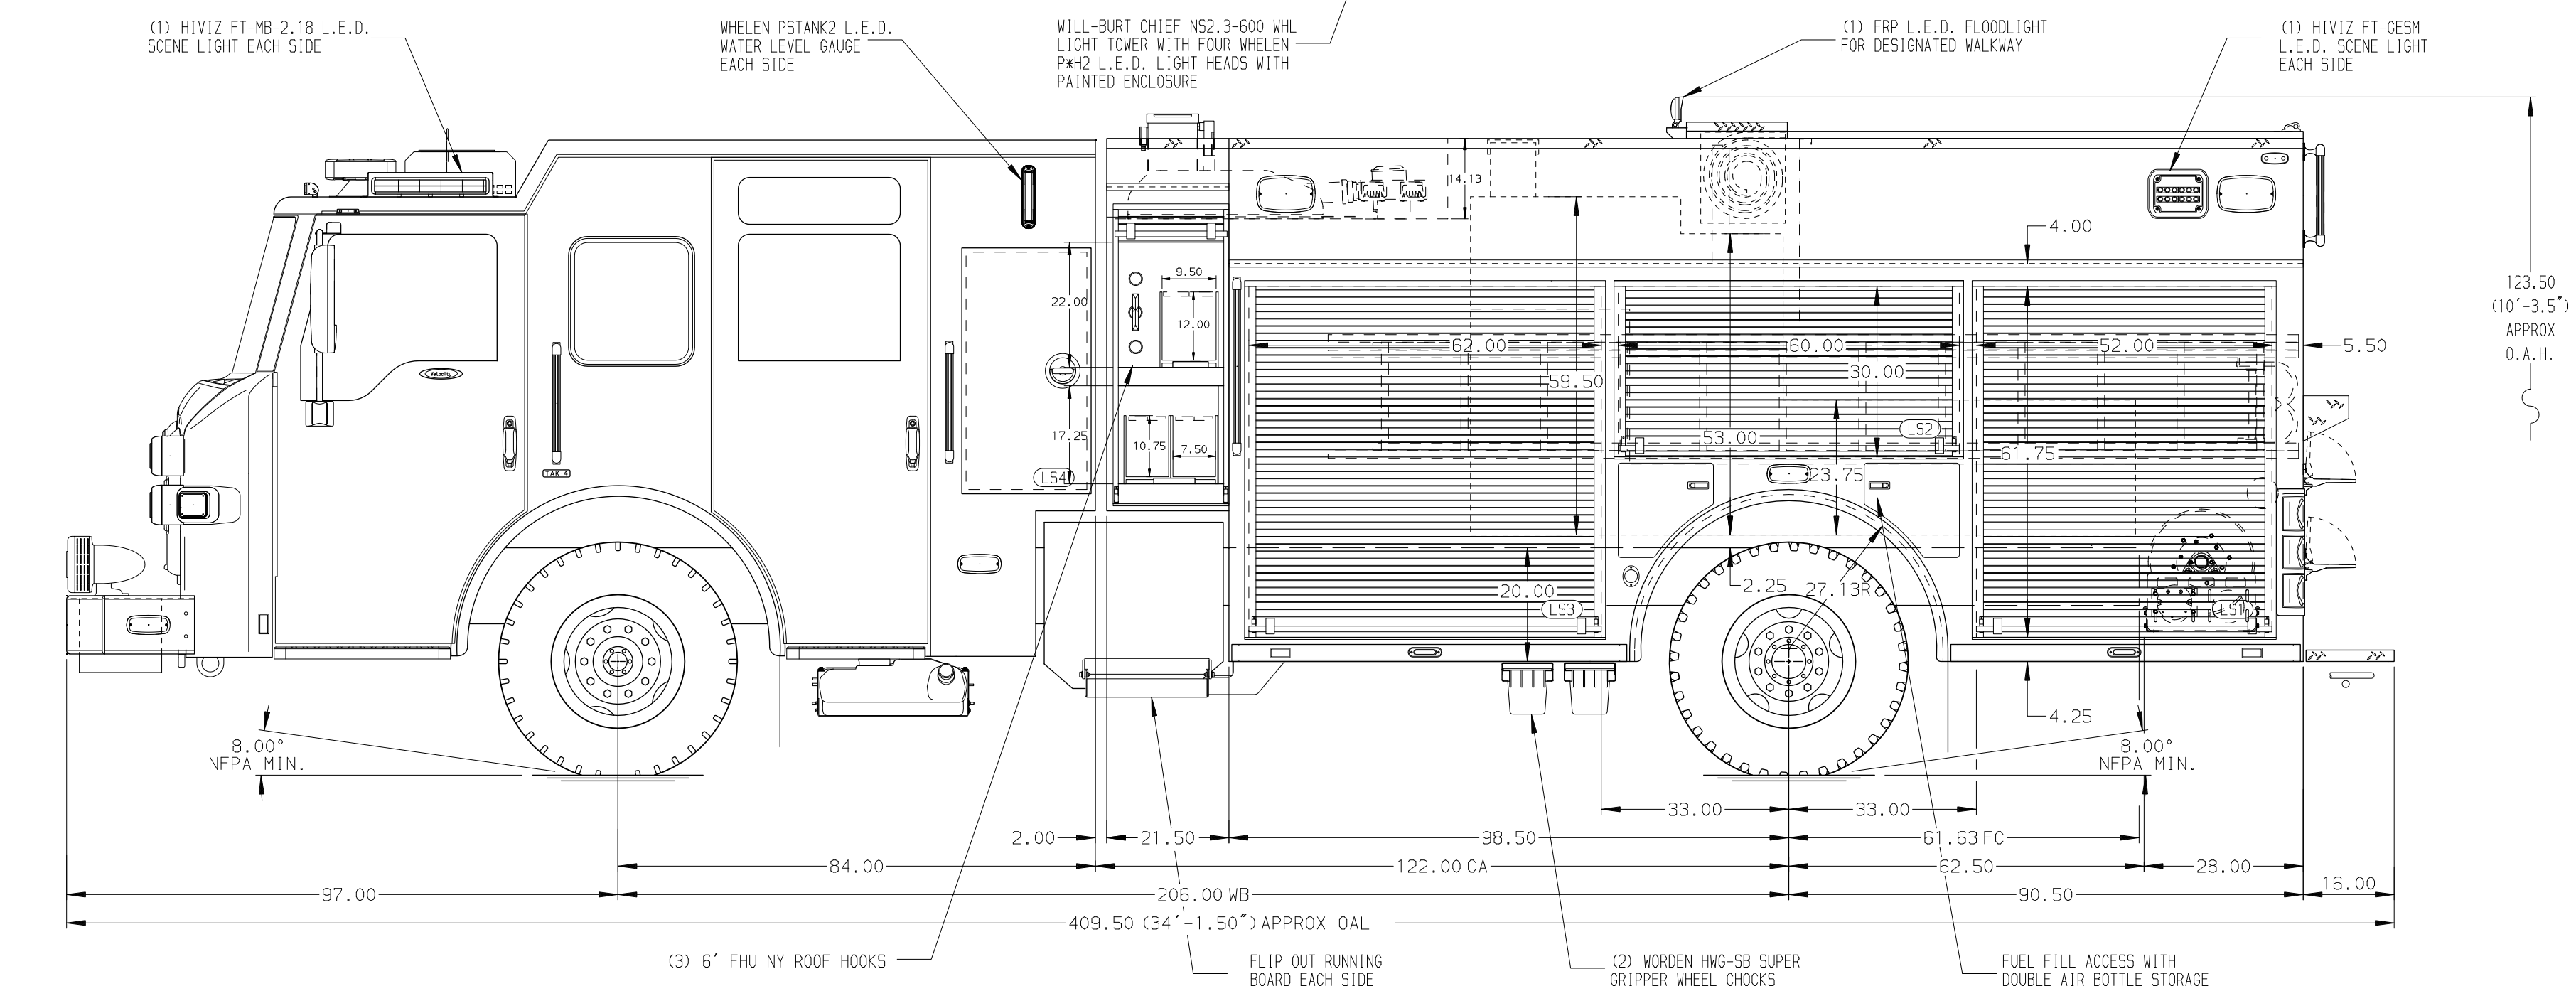

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- 2. BATTERY CHARGER LOCATED PER SHOP ORDER
- 3. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
- 4. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED PER SHOP ORDER
- 5. ALL FOLDING STEPS TO BE TRIDENT WITH INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED

29AUG24	JJB	JKR	CHASSIS DATA
19JUL24	MMF	JKR	MAKE
19JUL24	AMI	NPE	PIERCE
29MAY24	JJB	WKL	MODEL
REV	DATE	BY	CH
			VELOCITY FR

		JOB NO.	38923
		SCALE	1:24
		DATE	
		DRAWN BY	JJB
		22MAY24	
		CHECKED BY	KLH
		22MAY24	
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE	1500 GPM, 750G TANK, 730G WATER, 20G FOAM
FOR	189" PUC PUMPER, VELOCITY ESP
	LITTLE ELM FIRE DEPARTMENT
	LITTLE ELM, TEXAS
DWG NO.	38923AD