



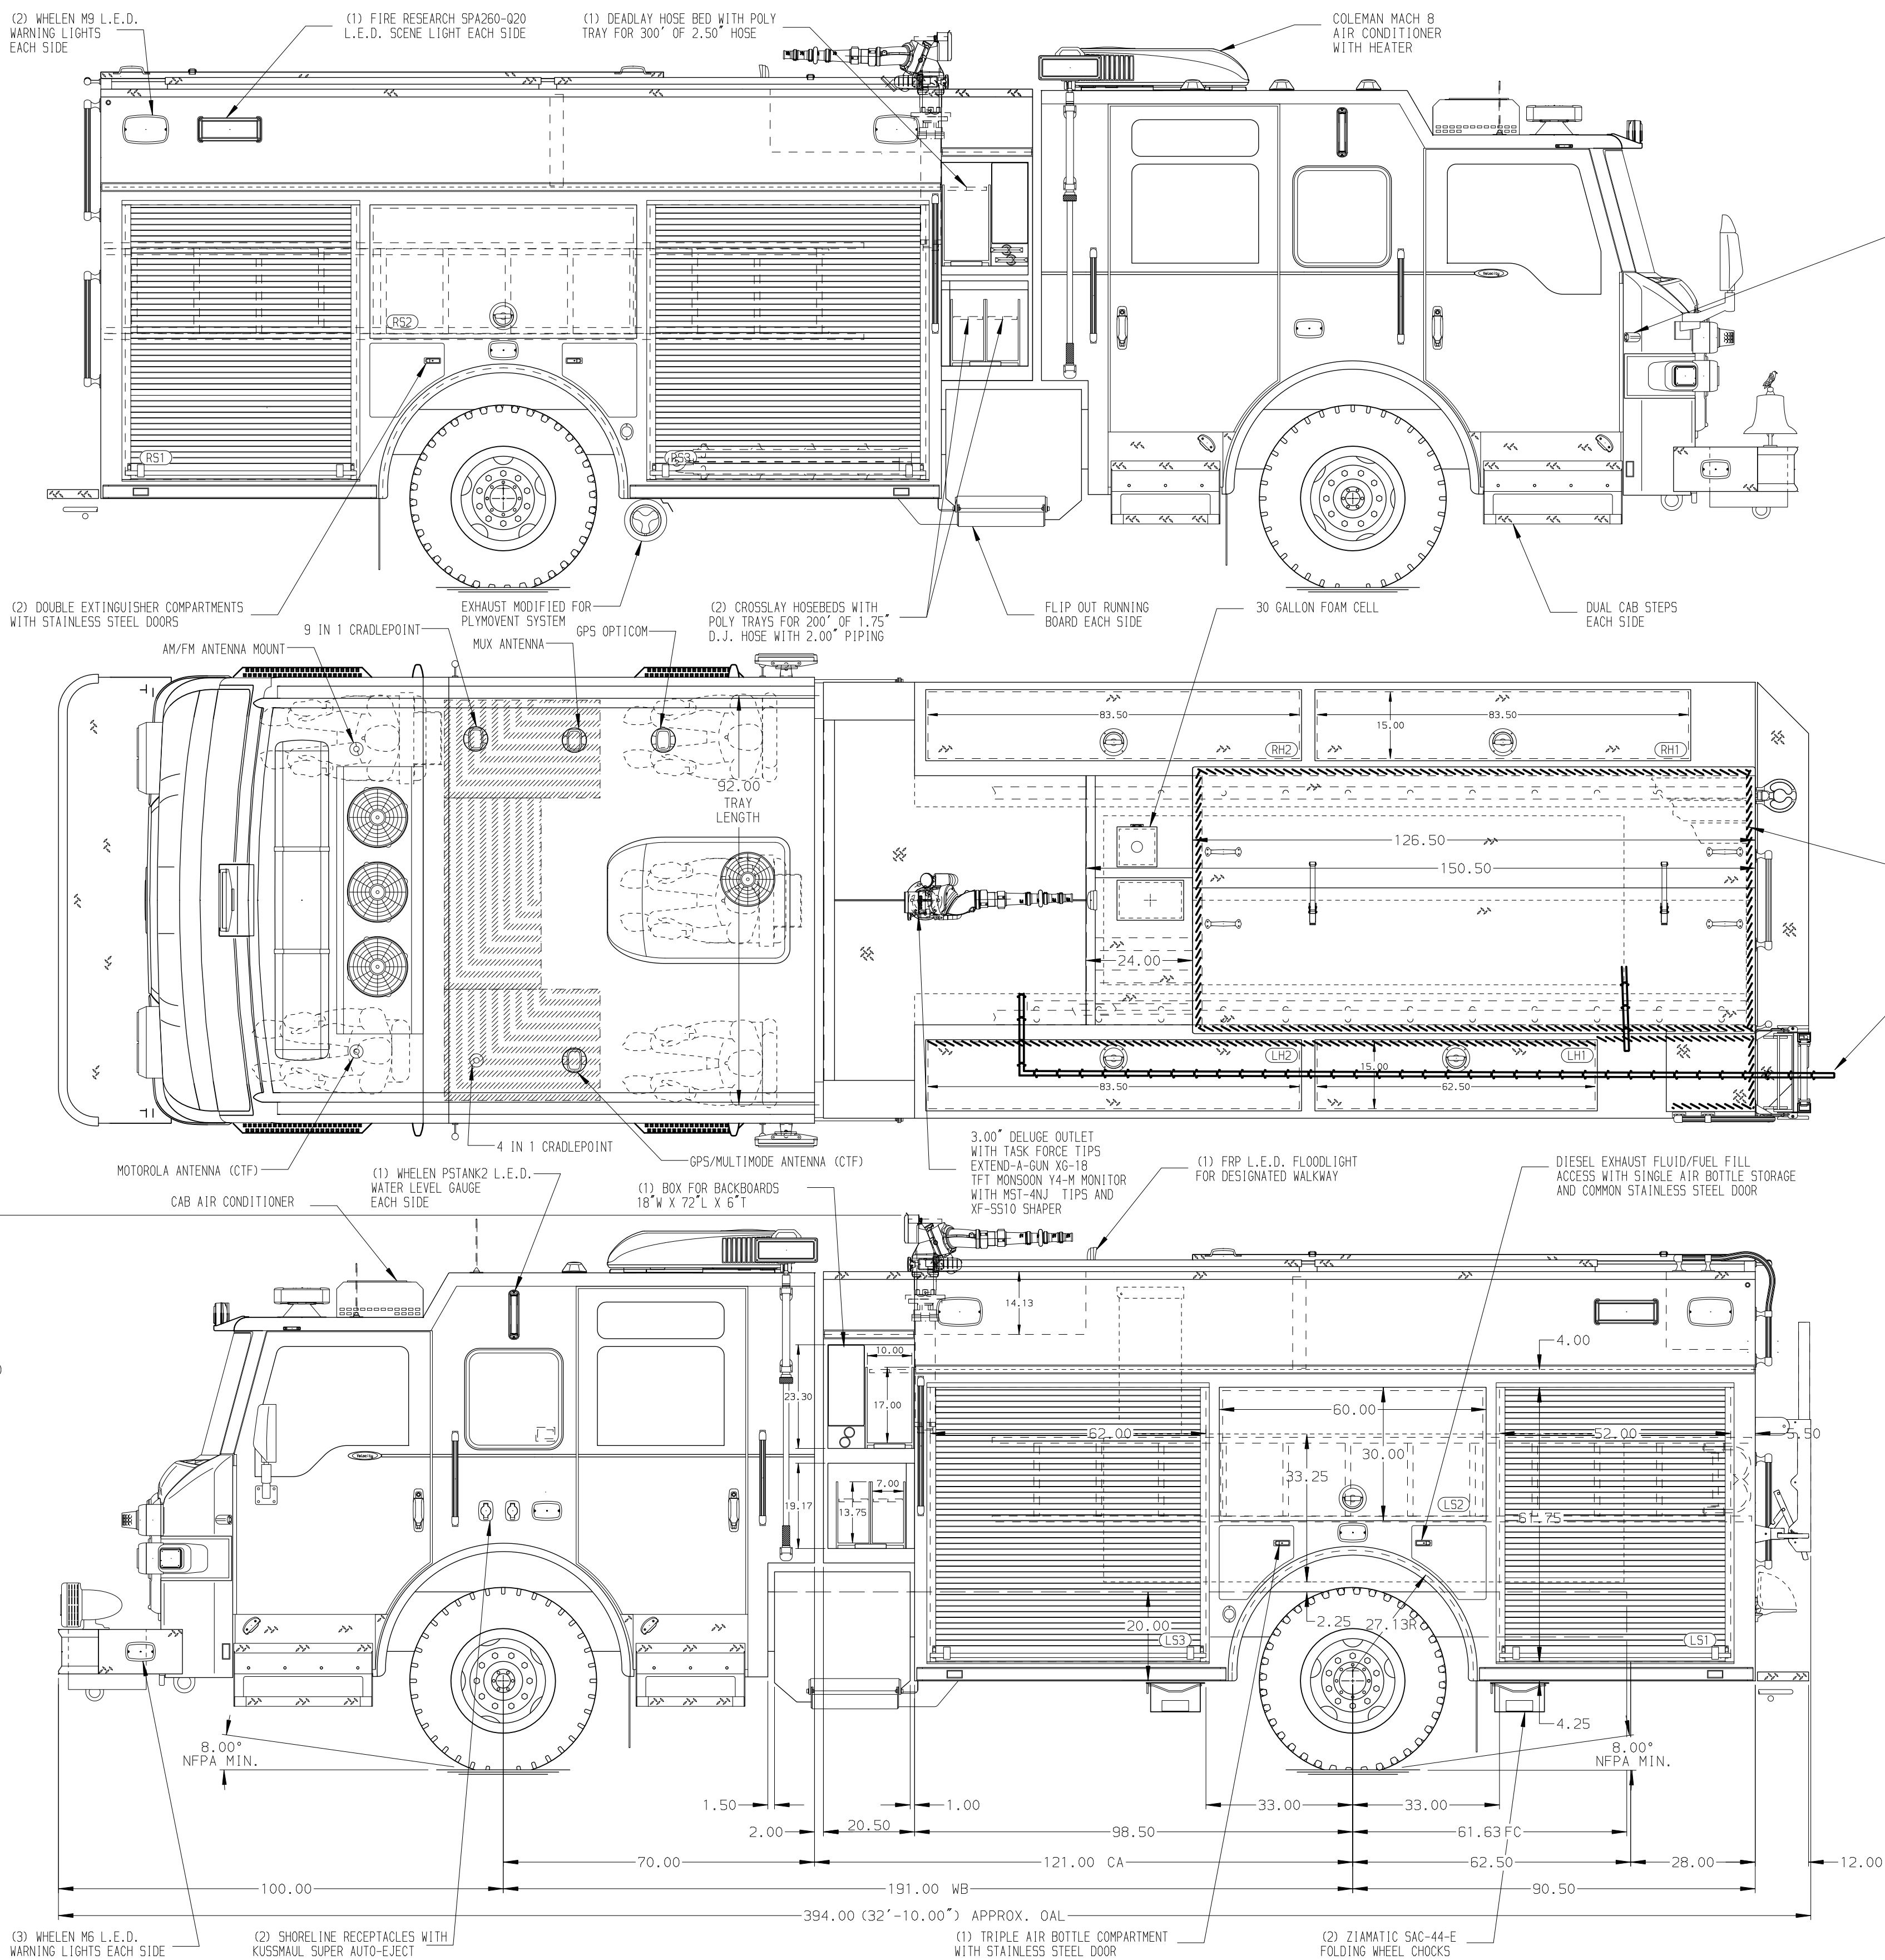

- HOSEBED CAPACITIES
- ① - 300' OF 1.75" D.J. POLY HOSE
 - ② - 300' OF 2.50" D.J. POLY HOSE
 - ③ - 300' OF 2.50" D.J. POLY HOSE
 - ④ - 800' OF 5.00" D.J. POLY HOSE

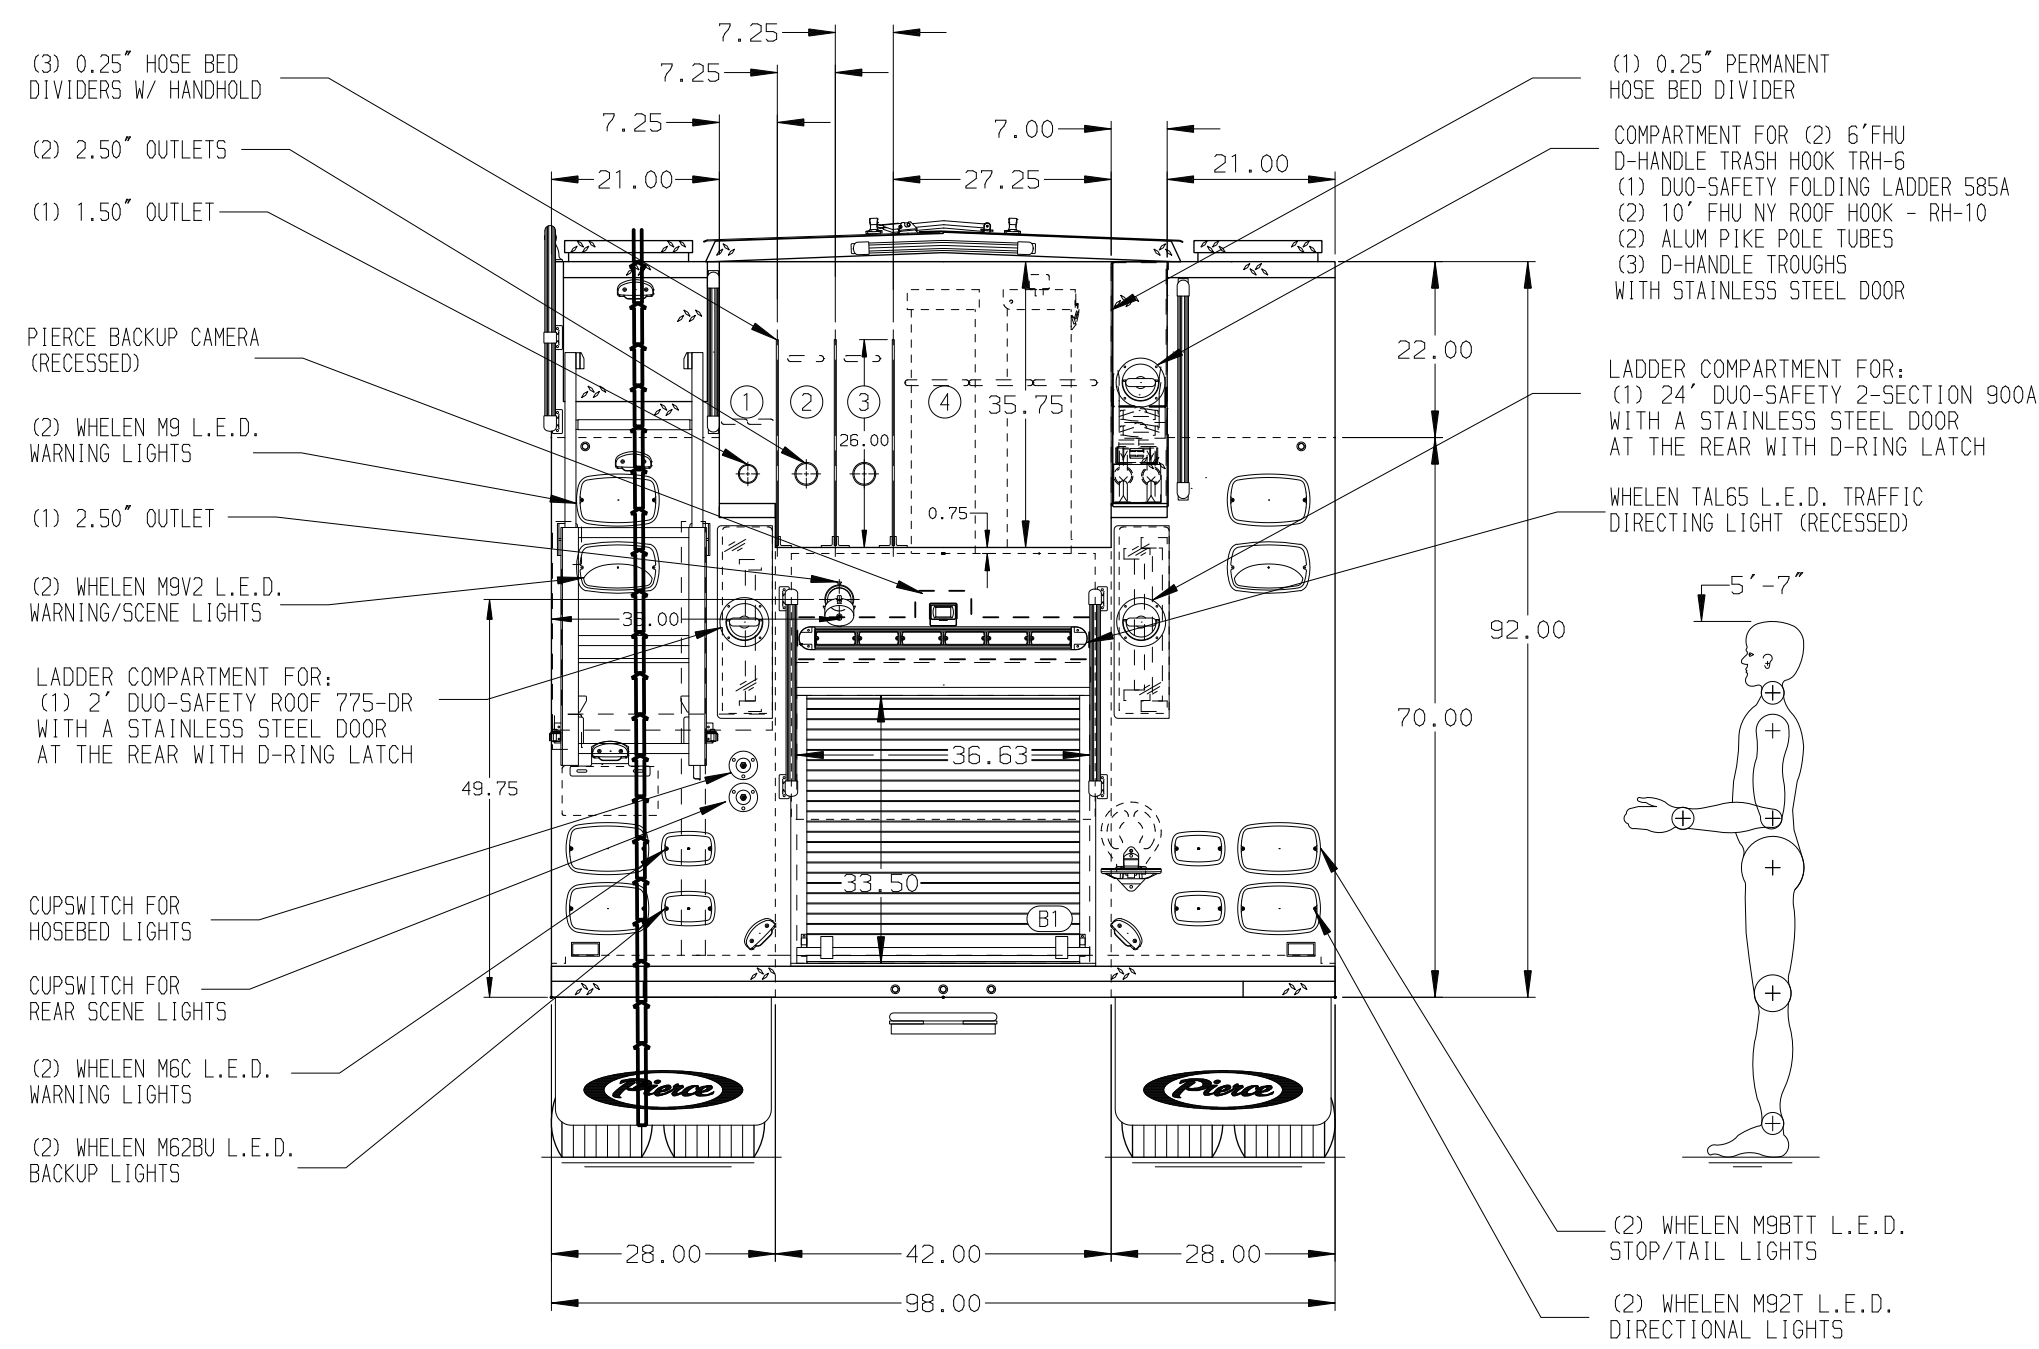

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
- SUB-FEED CIRCUIT BREAKER PANEL LOCATED PER SHOP ORDER
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 5/8" S/S PLATE ON ALL SIDES OF CROSSLAY OPENINGS
- 120V DUPLEX RECEPTACLE LOCATED PER SHOP ORDER
- AIR INLET WITH DISCONNECT COUPLING BEHIND THE DRIVER'S SIDE SEAT RISER
- ONE PARTIL DIVIDER WITH DEFLECTOR LOCATED PER SHOP ORDER
- FOAMPRO 2002 LOCATED PER SHOP ORDER
- BATTERY CHARGER LOCATED IN DRIVER'S SIDE HATCH COMPARTMENT

REV	DATE	BY	CH	VELOCITY
20DEC24	JAM	BSE		
10DEC24	JAM	BSE		
05NOV24	JAM	BSE		
04OCT24	JAM	BSE		

Pierce MANUFACTURING INC.		JOB NO.	39319 01-03
		SCALE	DATE
		DRAWN BY	25SEP24
		CHECKED BY	27SEP24
		SHEET SIZE	SHEET NO.
		D	1 OF 2

TITLE	1500 GPM, 530G TANK, 500G WATER, 30G FOAM 189" PUC RESCUE, MUX
FOR	HENDERSON FIRE DEPARTMENT HENDERSON, NEVADA
DWG NO.	39319AD-SH1