

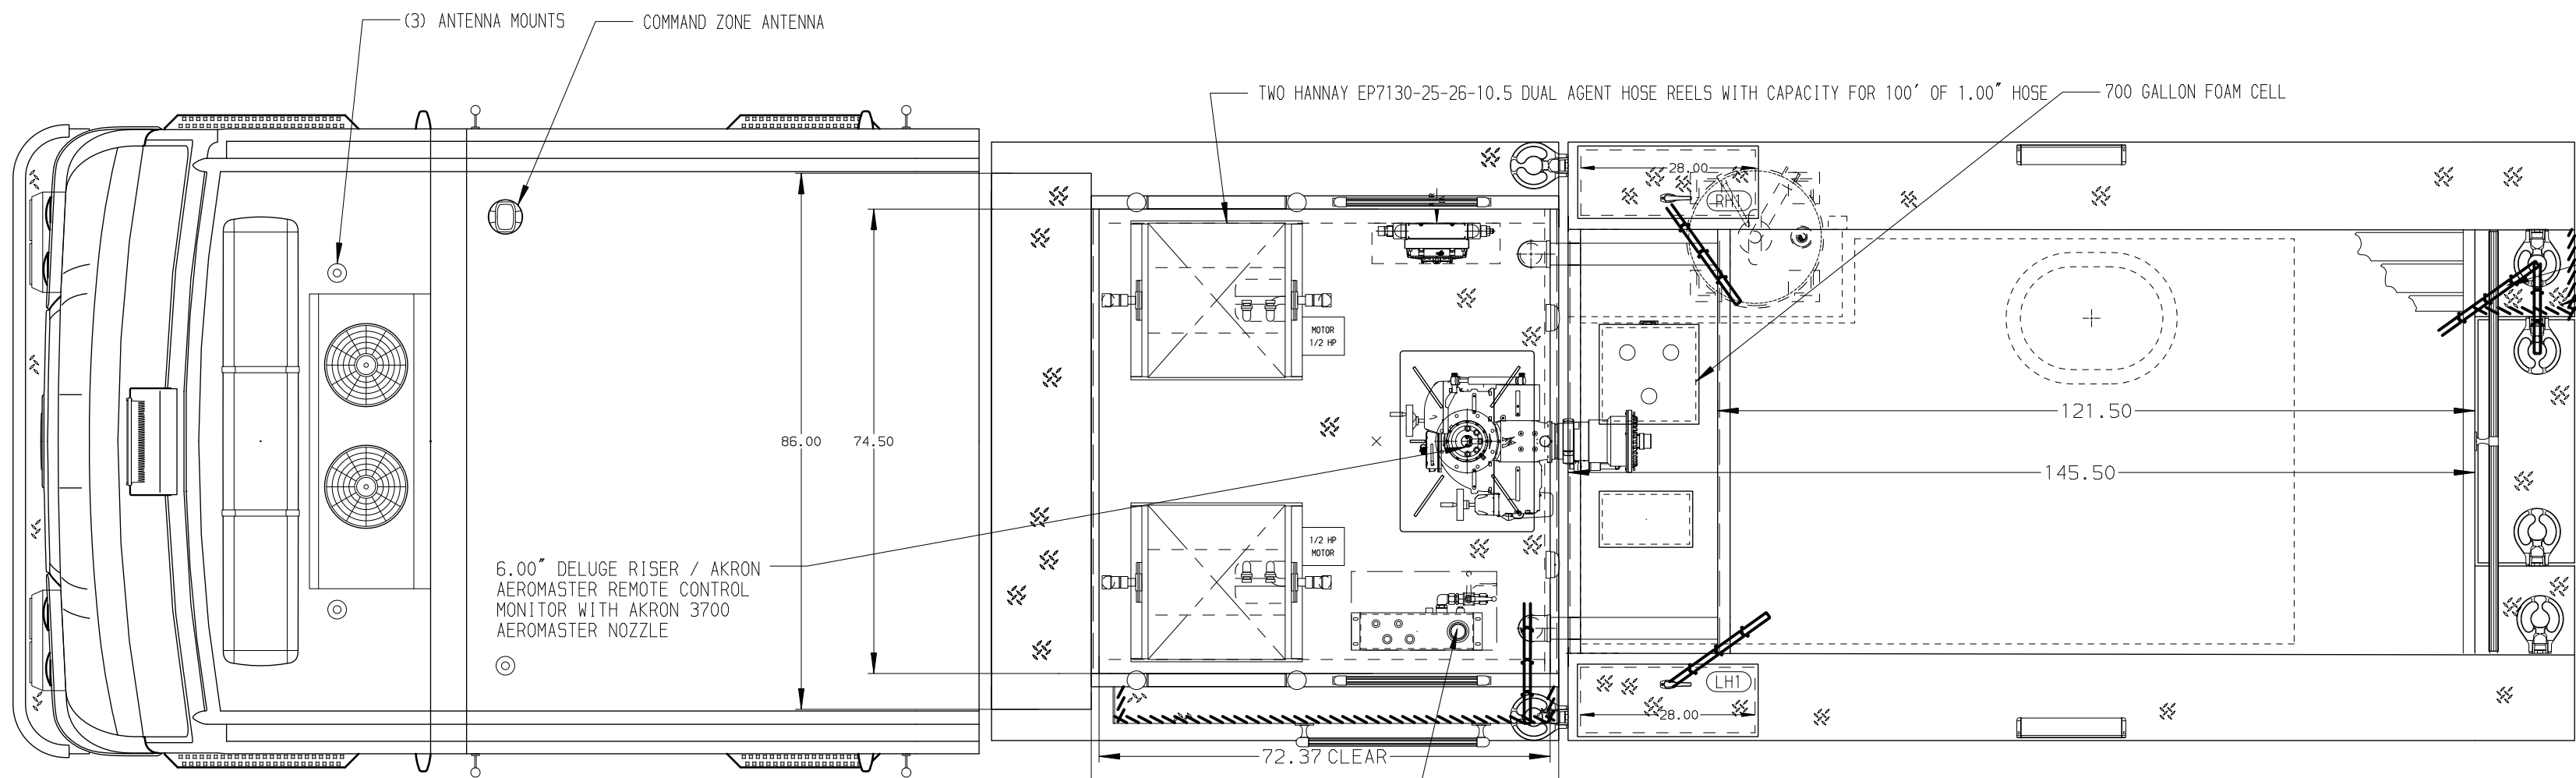
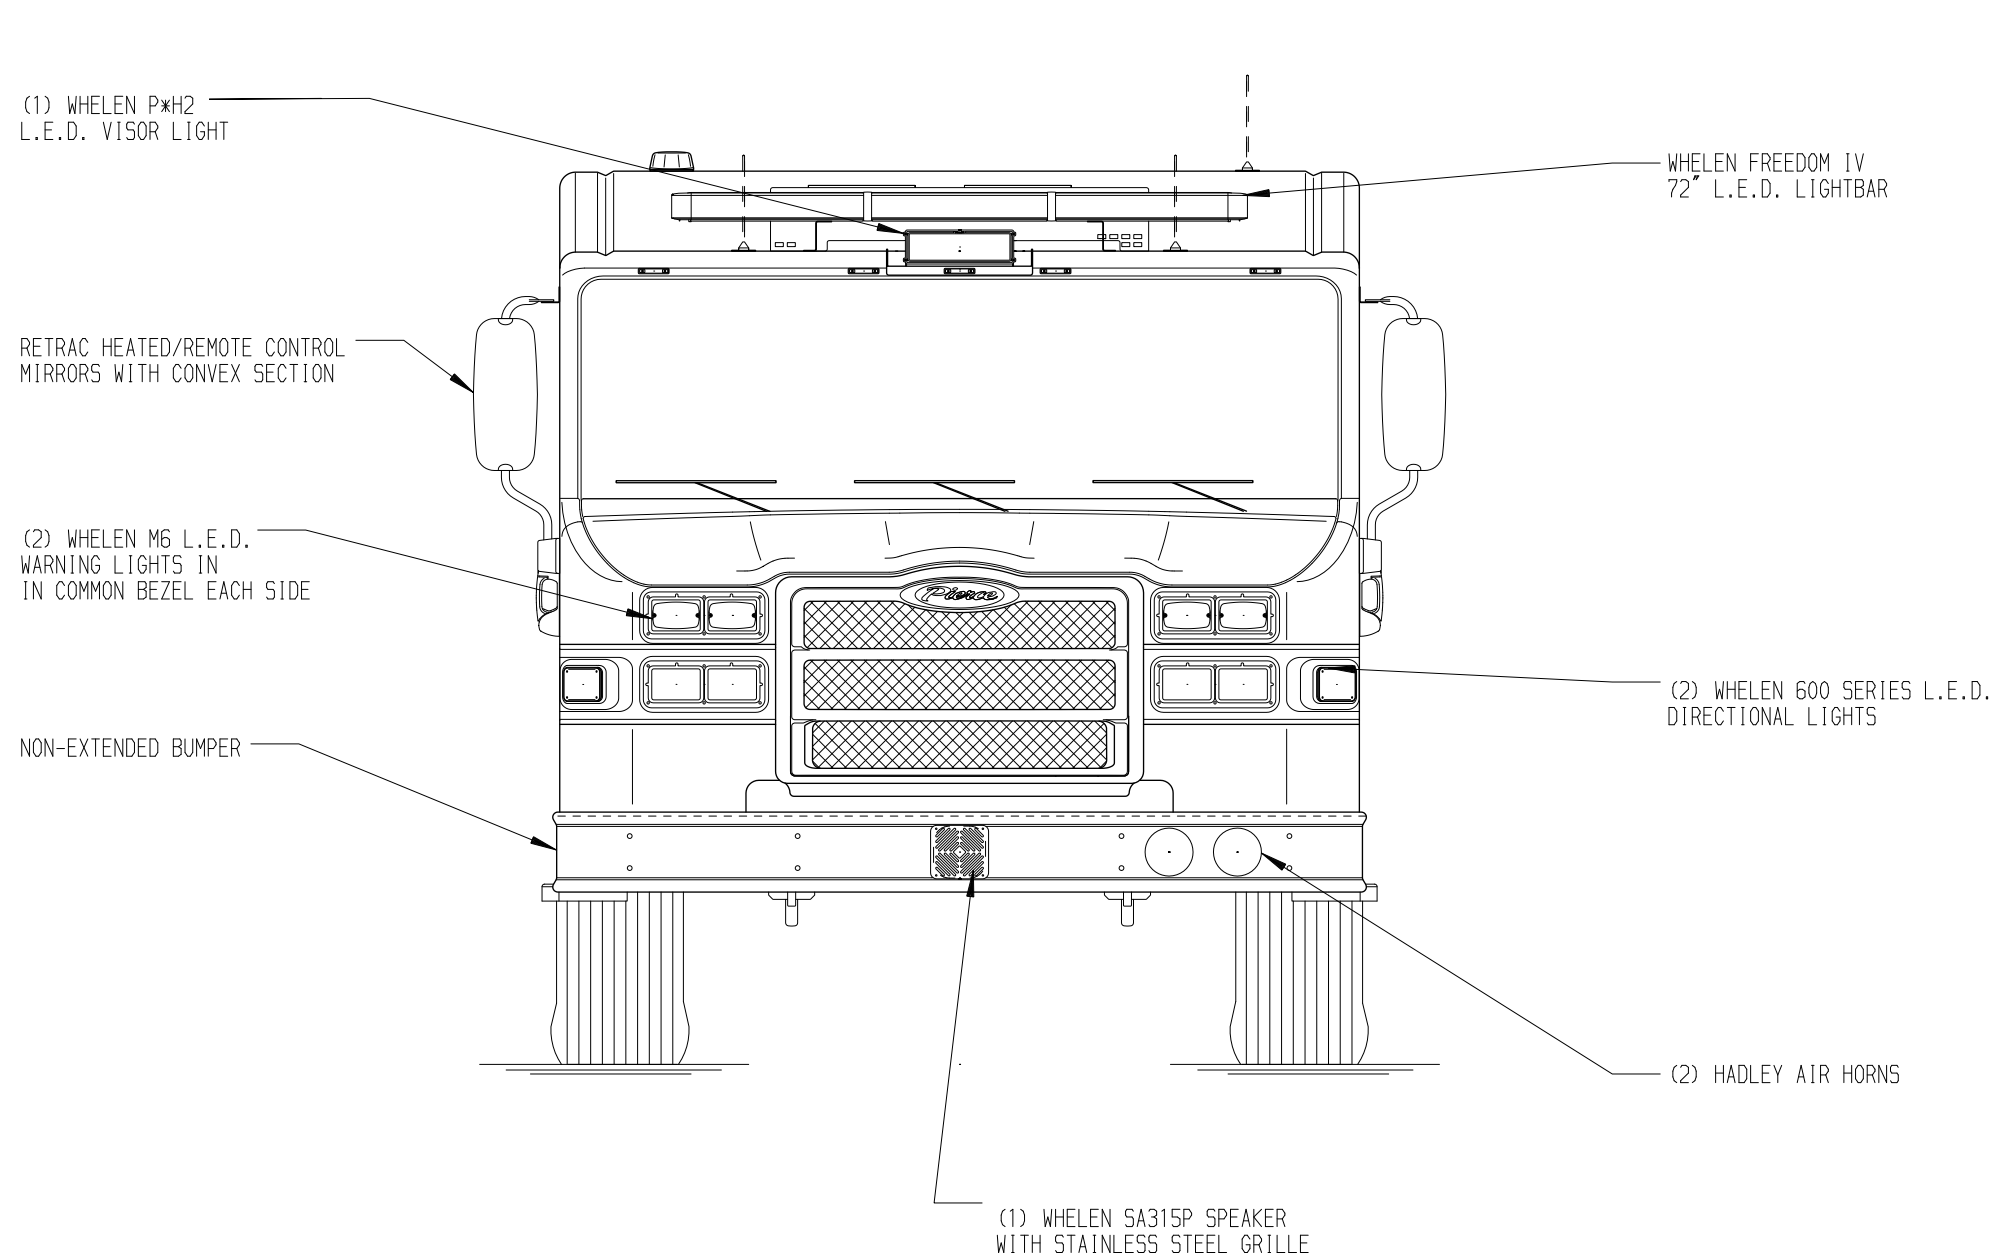


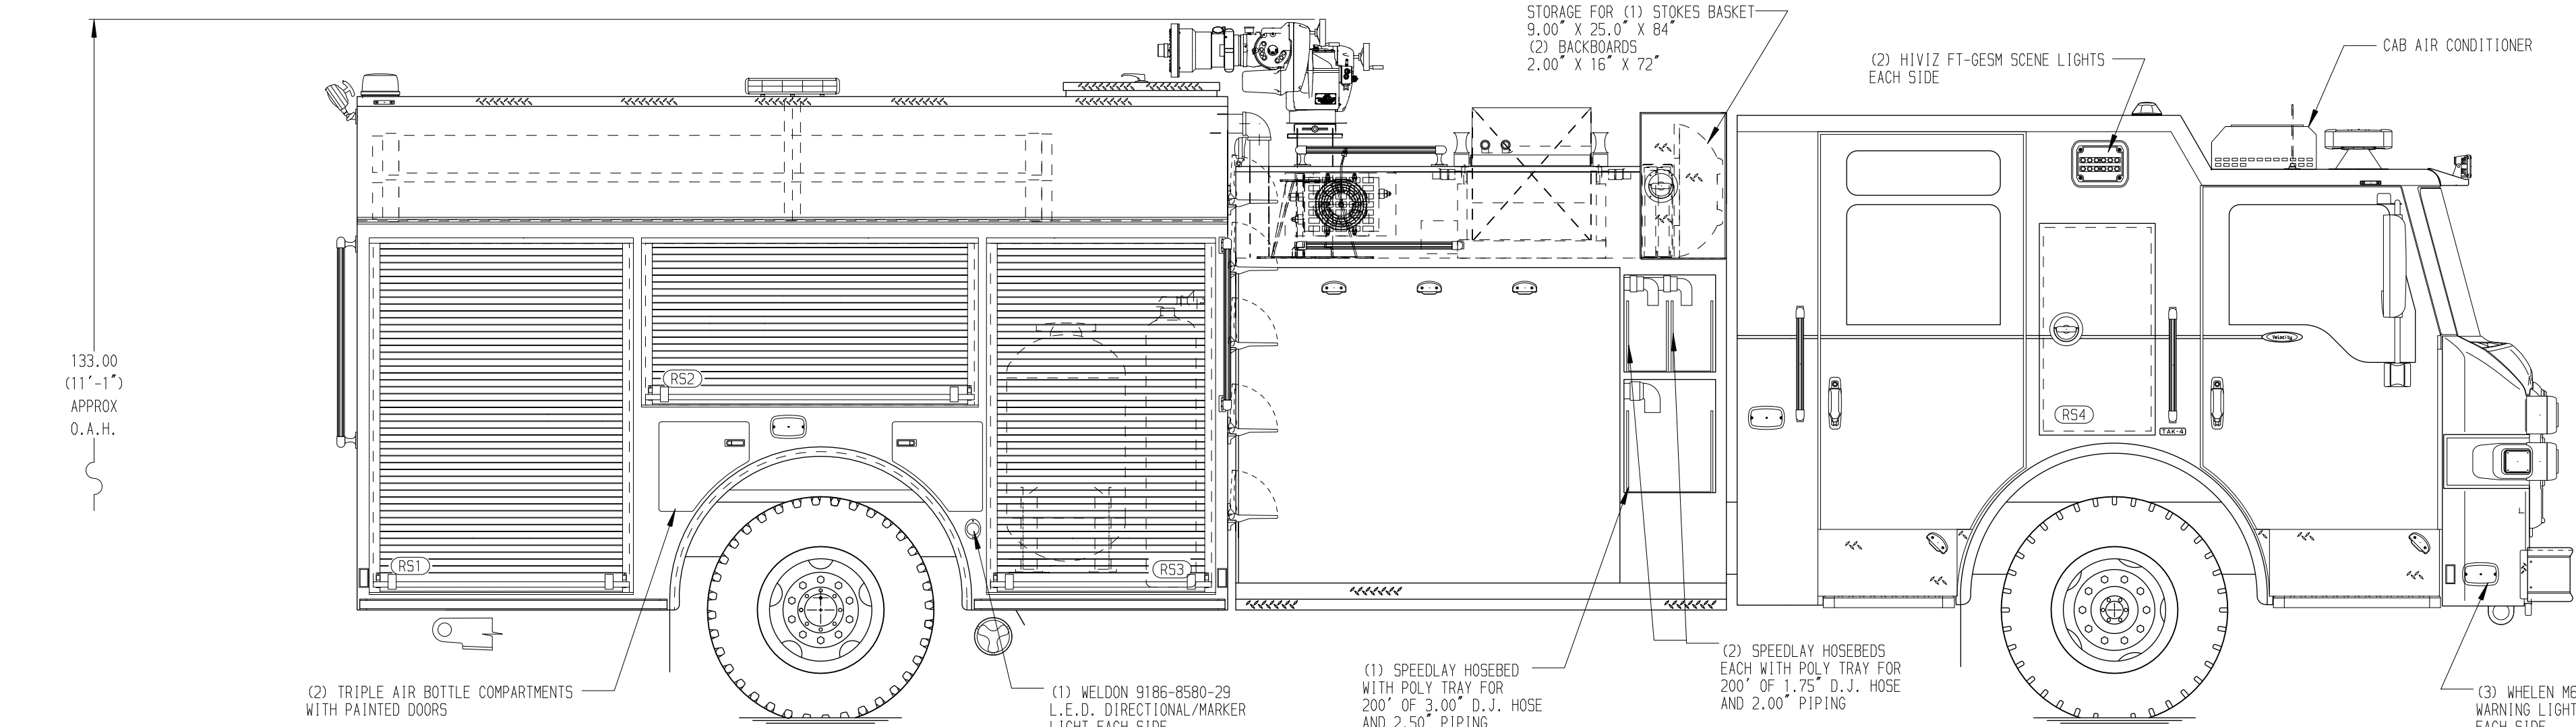

SURFACE DESIGNATION AND PATHWAY MARKINGS

- HOSEBED CAPACITIES
- ① 500' OF 3.00" D.J. POLY HOSE
 - ② 1000' OF 5.00" D.J. POLY HOSE
 - ③ 500' OF 3.00" D.J. POLY HOSE

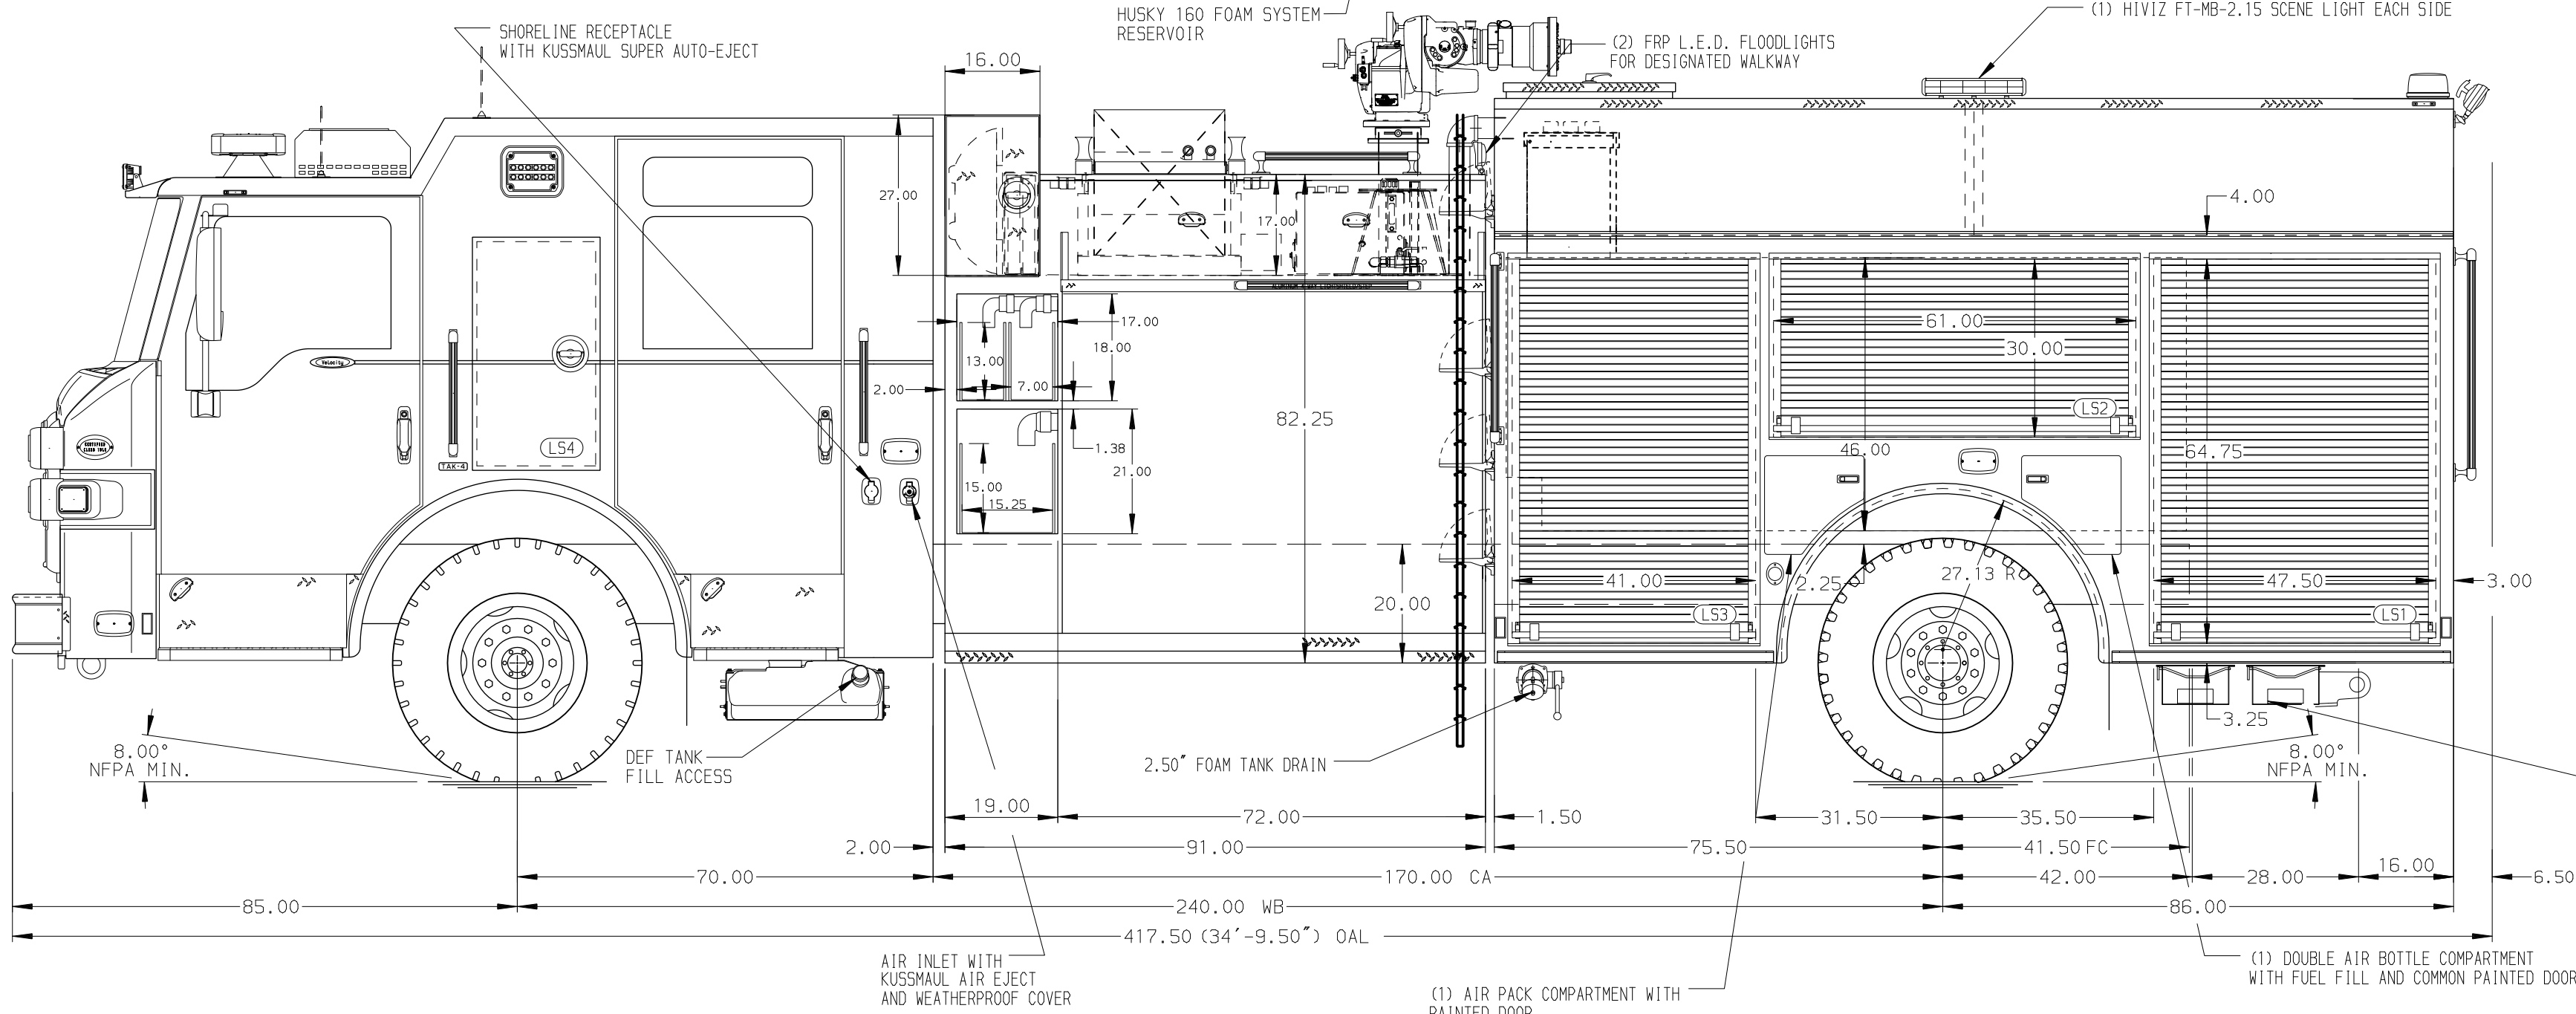

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. BATTERY CHARGER INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
- 2. INVERTER/ BATTERY CHARGER LOCATED BEHIND THE DRIVER'S SEAT

REV	DATE	BY	CH	VELOCITY FR
01APR25	LST	CHR		
17FEB25	LST	CHR		
13DEC24	LST	WKL		

Pierce MANUFACTURING INC.		JOB NO.	39340
		SCALE	1:24
		DATE	
TITLE		DRAWN BY	LST
FOR		CHECKED BY	WKL
DWG NO.		SHEET SIZE	D
		SHEET NO.	1 OF 2

2000 GPM, 1000 GAL TANK, 300 GAL WATER, 700 GAL FOAM
161" BODY, VELOCITY ESP
CVR ENERGY
WYNNEWOOD, OKLAHOMA
39340AD-SH1