


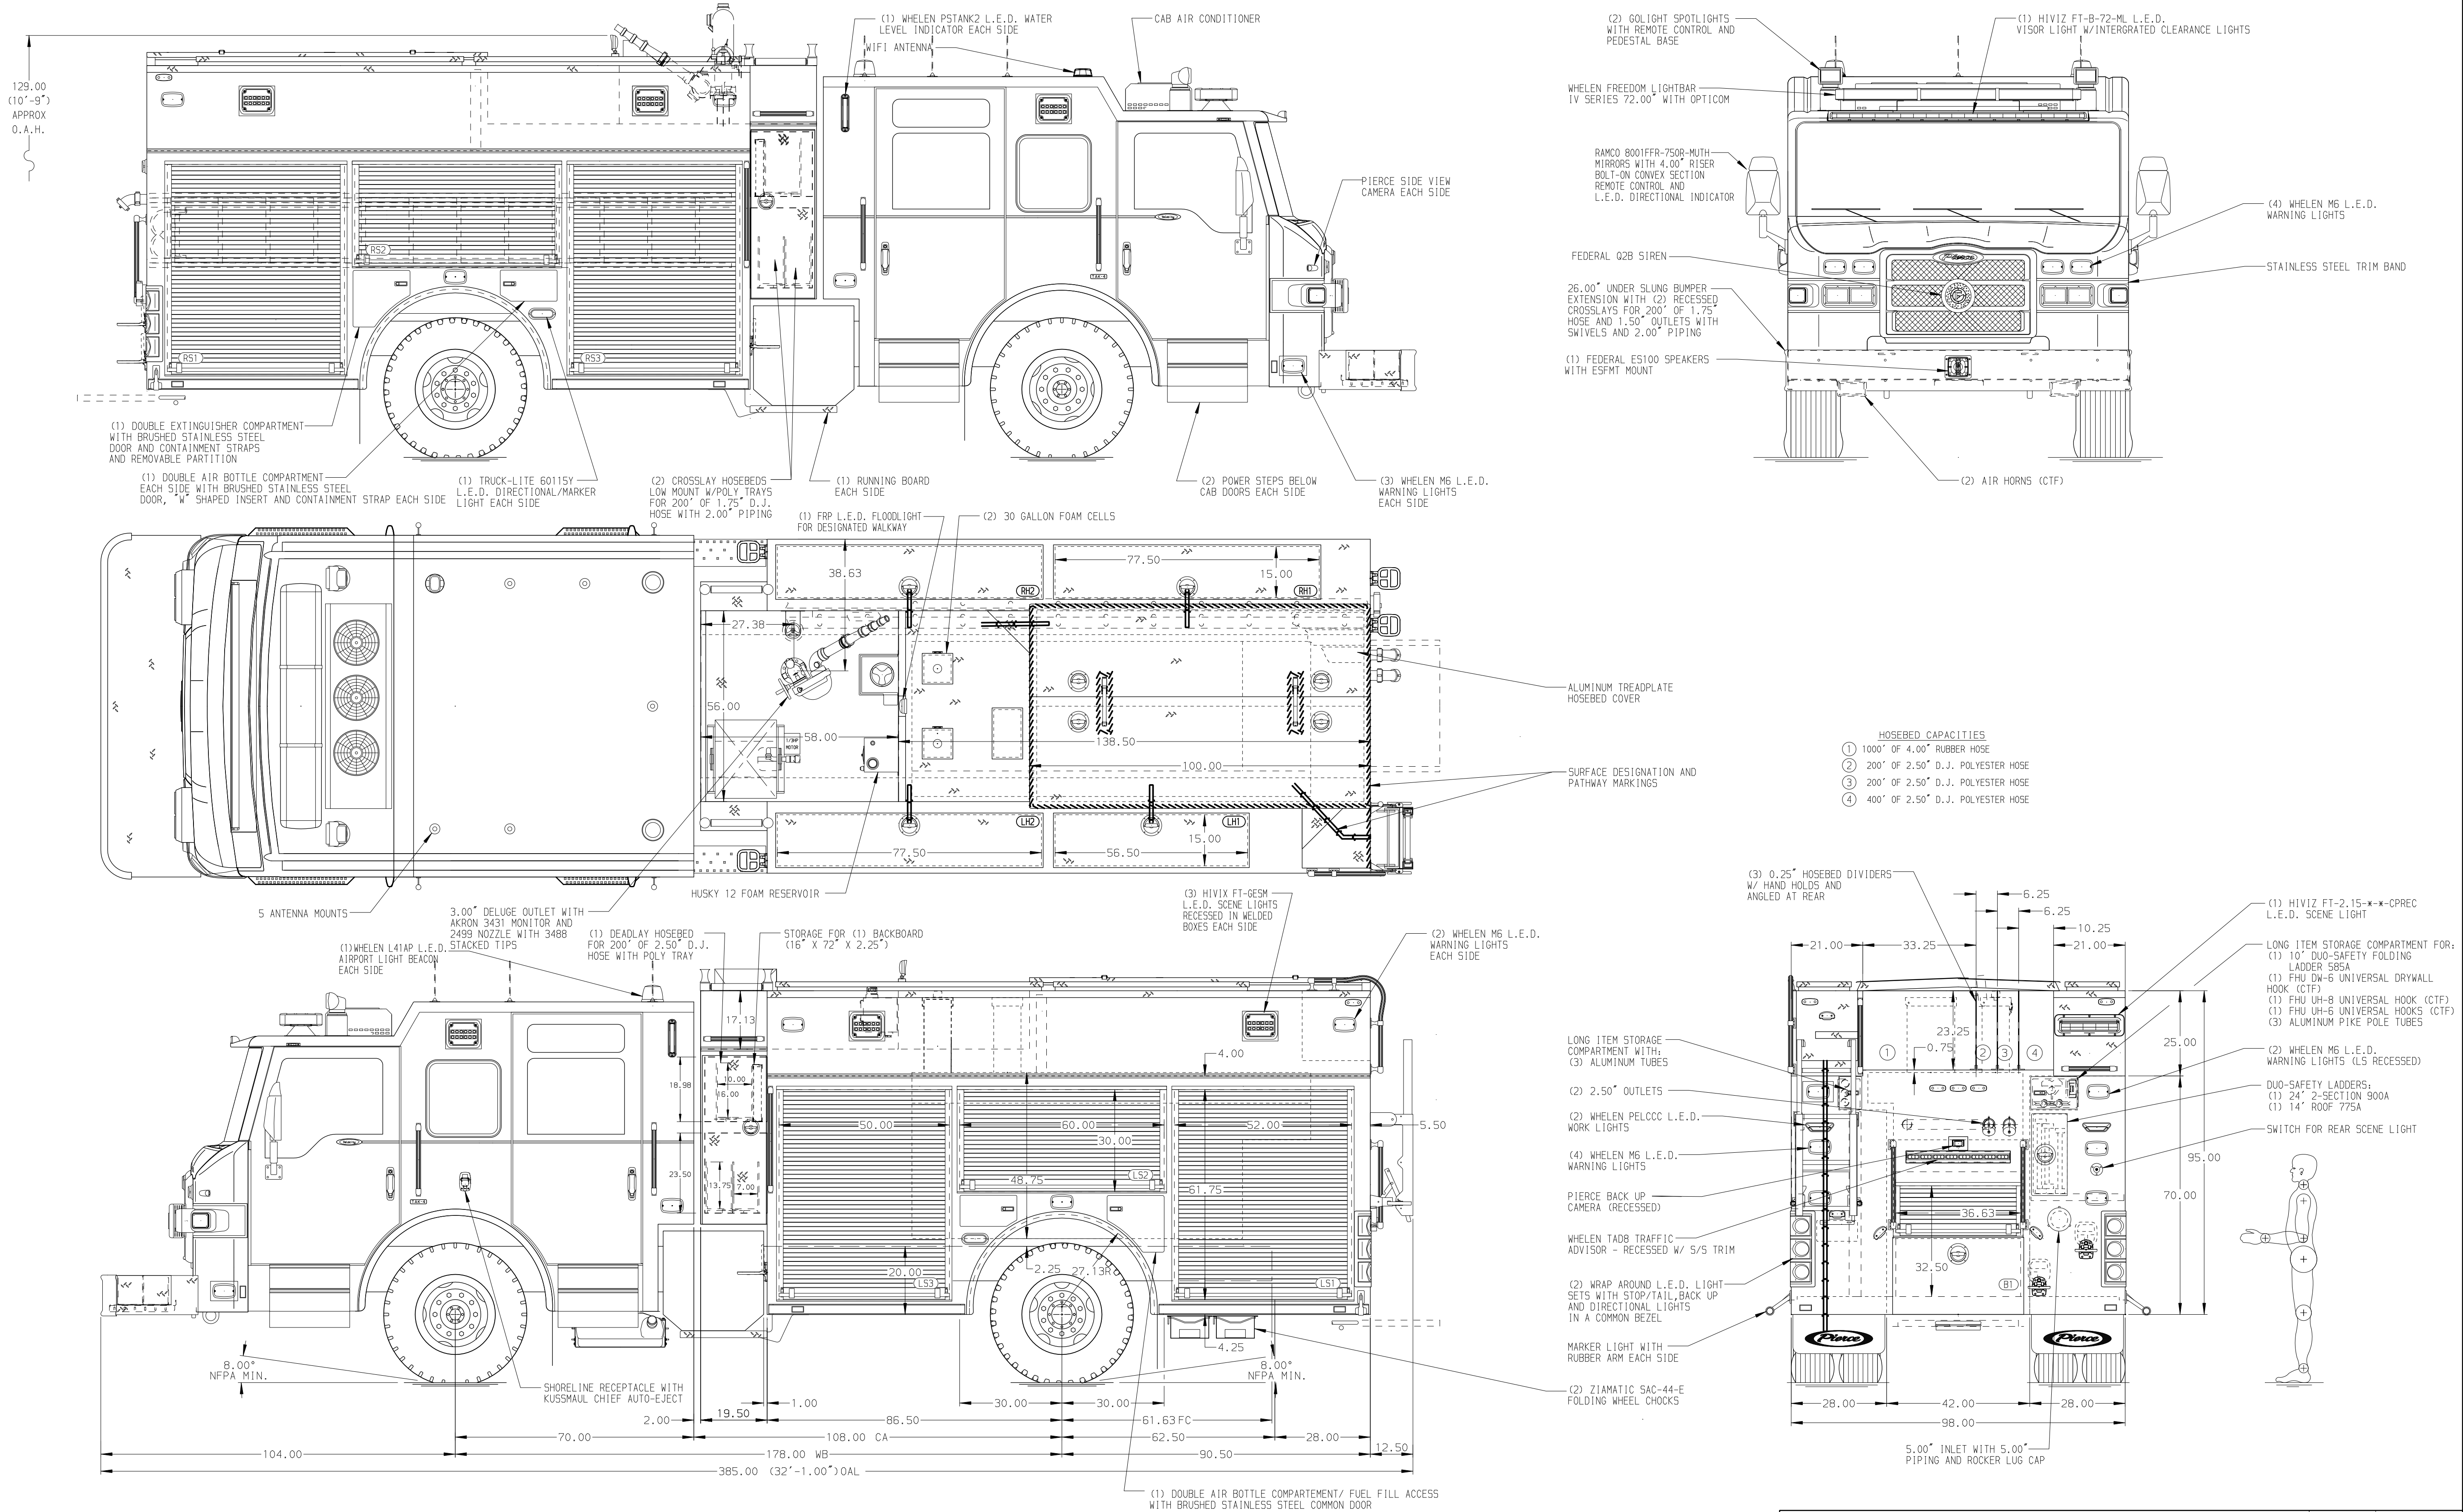

- HOSEBED CAPACITIES**
- ① 1000' OF 4.00" RUBBER HOSE
 - ② 200' OF 2.50" D.J. POLYESTER HOSE
 - ③ 200' OF 2.50" D.J. POLYESTER HOSE
 - ④ 400' OF 2.50" D.J. POLYESTER HOSE

ALUMINUM BODY

SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. PUMP PANEL DRAWING REQUIRED
2. AIR INLET LOCATED ON L5 PUMP PANEL
3. AIR OUTLET ON L5 PUMP PANEL
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. ONE HANNAY ELECTRIC REWIN BOOSTER HOSE REEL MODEL EF26-23-24-10.5 WITH 150' OF 0.75" NYLON HOSE LOCATED IN CARGO AREA
6. ELECTRIC LOCKS ON ROLL UP DOOR OF COMPARTMENT RS3

				CHASSIS DATA	TITLE	1500 GPM, 740 G WATER, 680 G WATER, 60 G FOAM 177" BODY, VELOCITY ESP ELECTRICAL SYSTEM
				MAKE	FOR	CITY OF SCOTTSDALE SCOTTSDALE, ARIZONA
10MAR25	LST	JJR	PIERCE	MODEL	DWG NO.	39514AD-SH1
30JAN25	LST	JJR	VELOCITY FR			
REV	DATE	BY	CH			

JOB NO.	39514 01-02
SCALE	1:24
DATE	
DRAWN BY	LST
CHECKED BY	JJR
SHEET SIZE	D
SHEET NO.	1 OF 2