

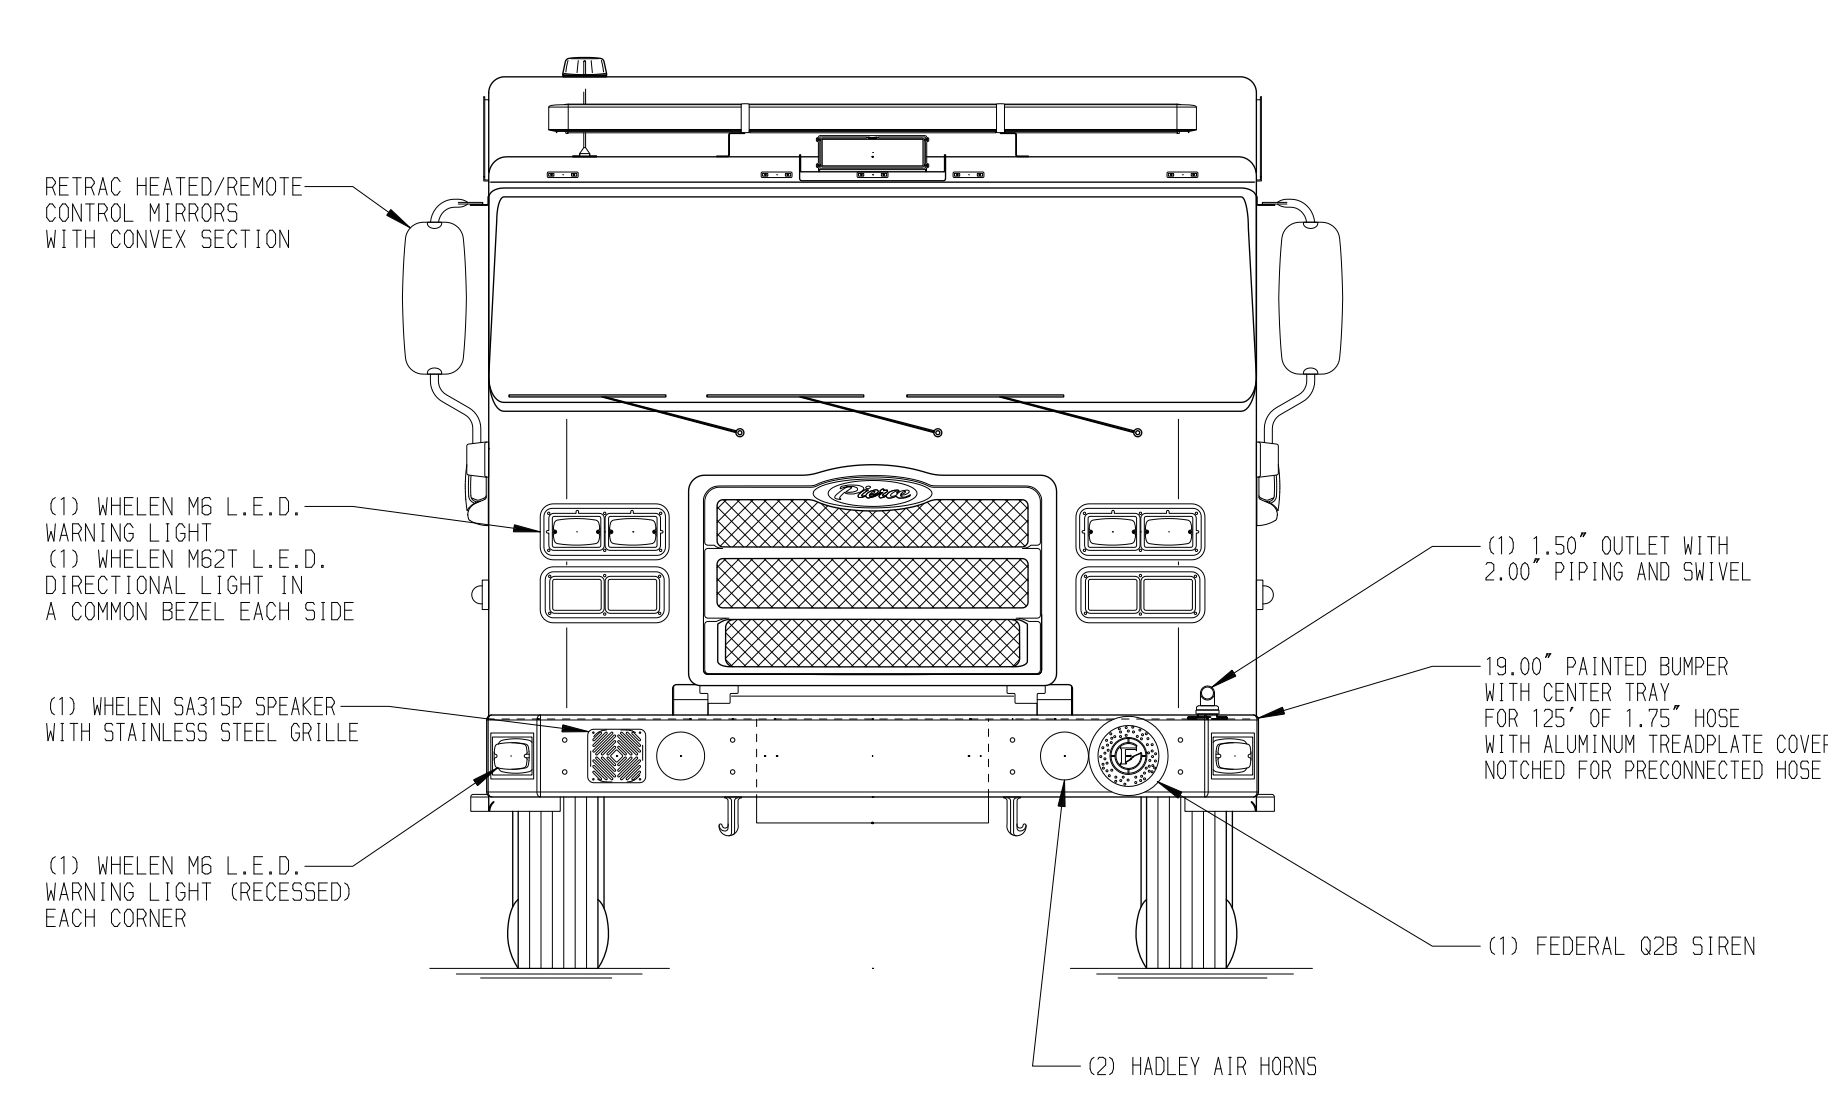
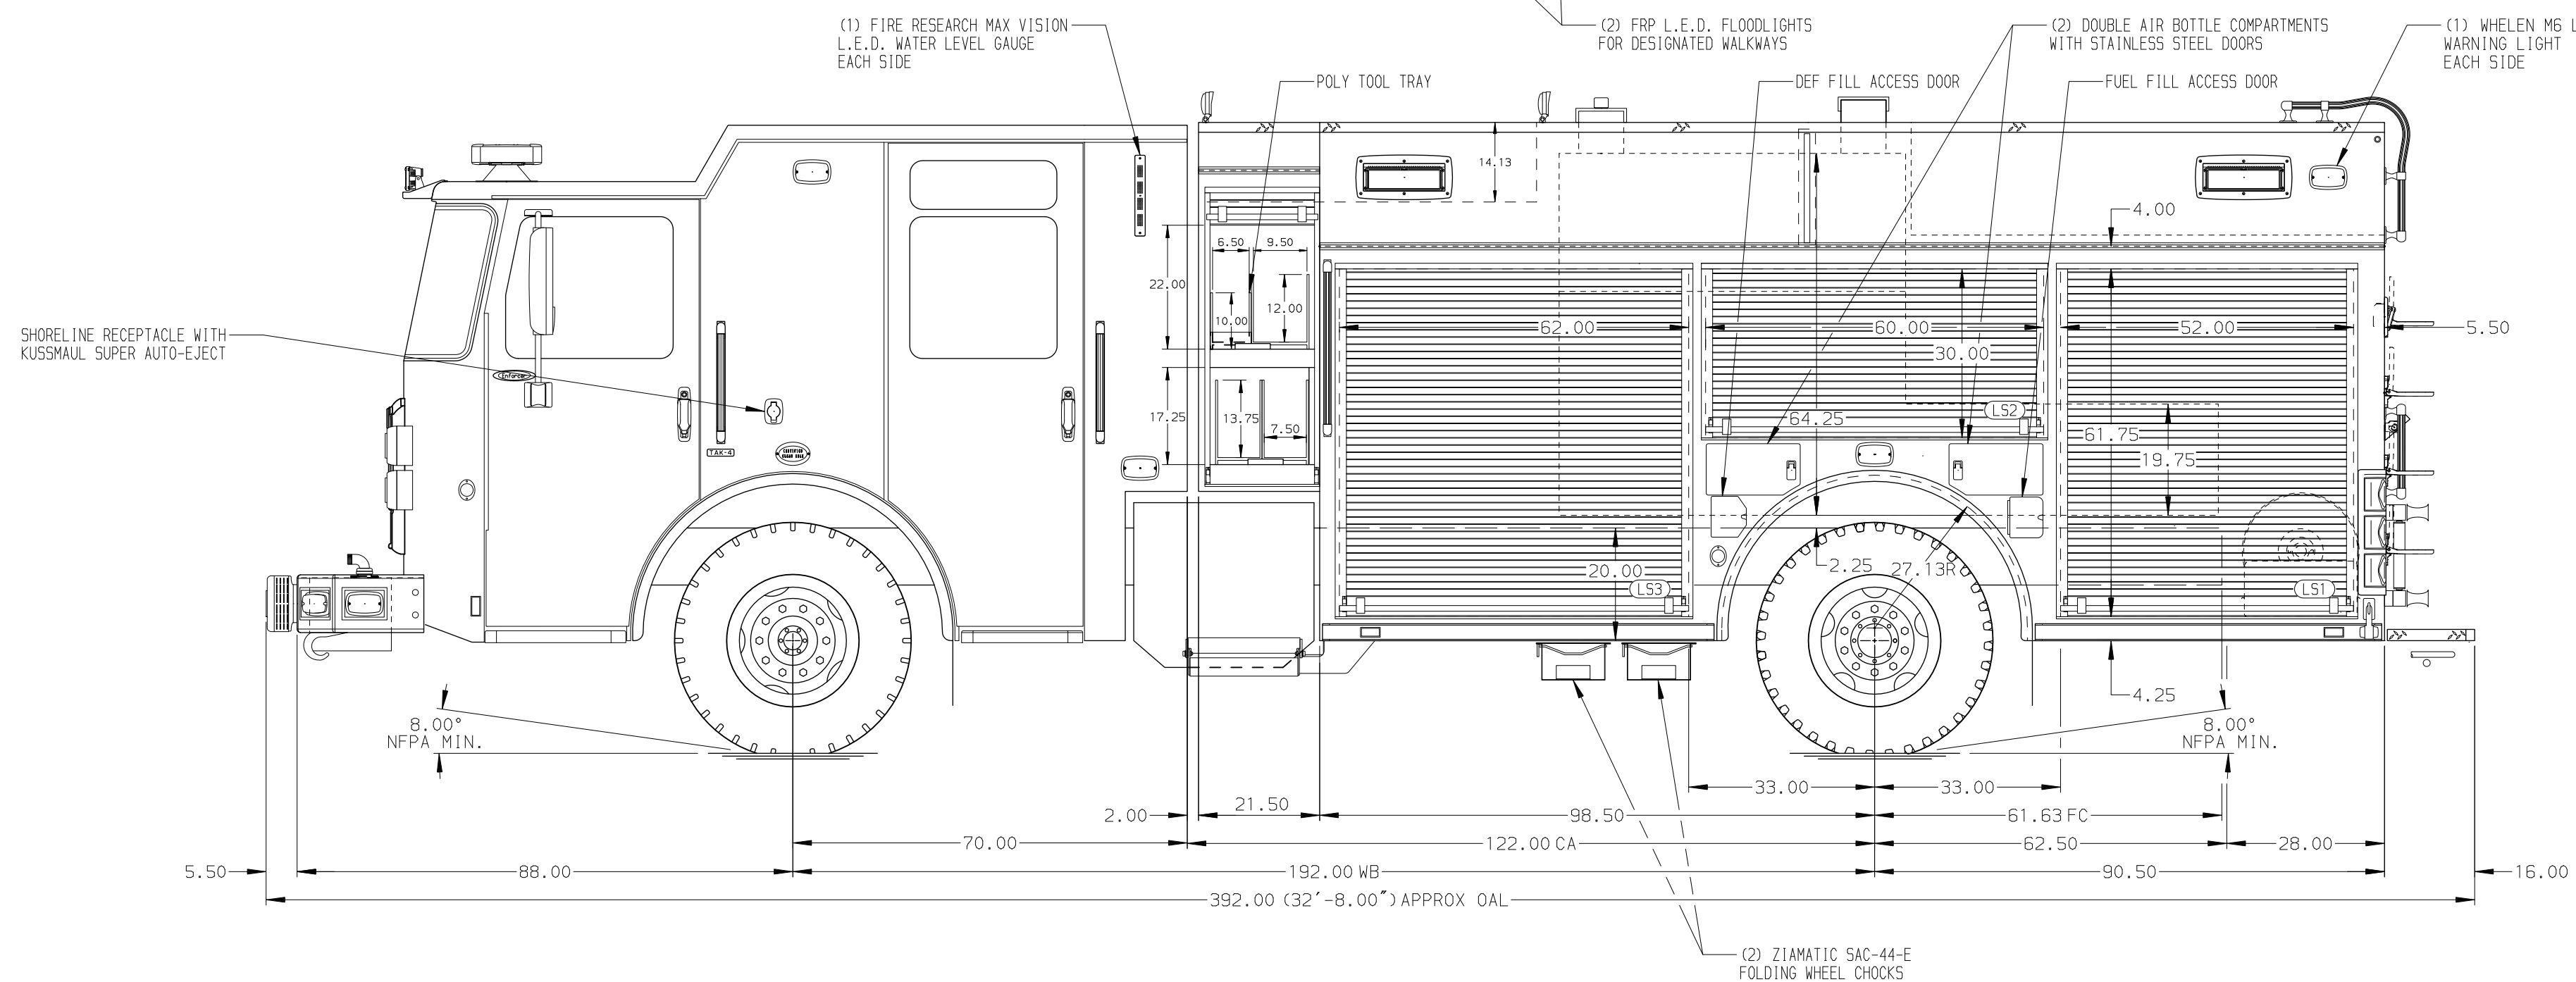
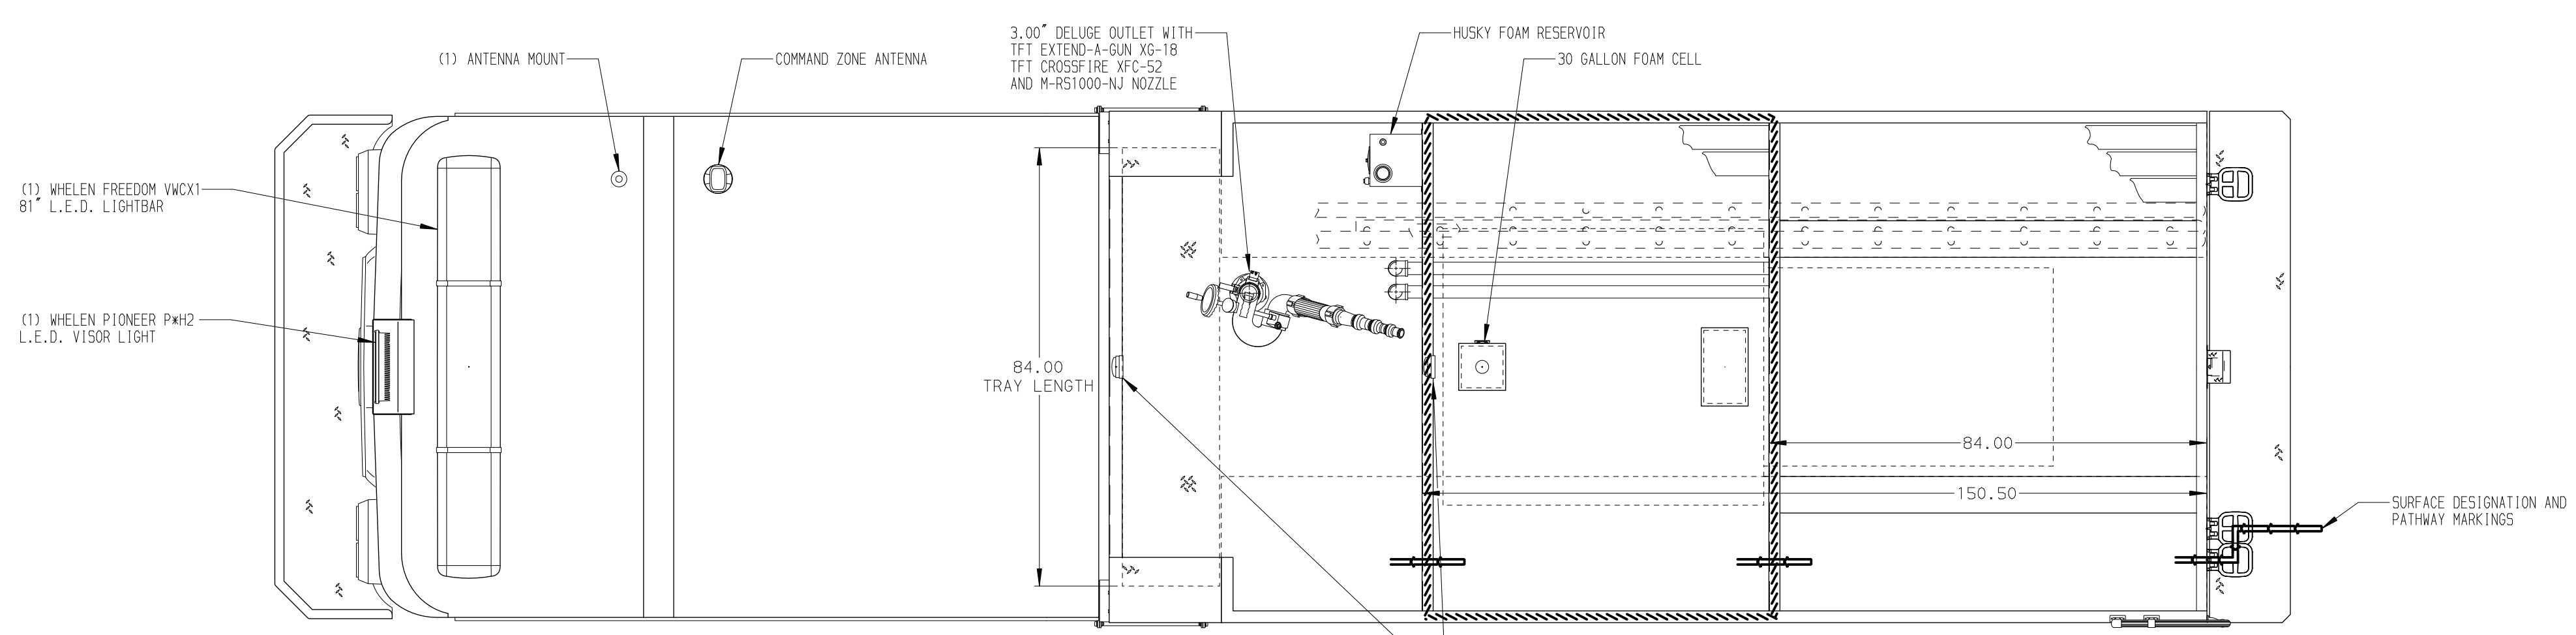


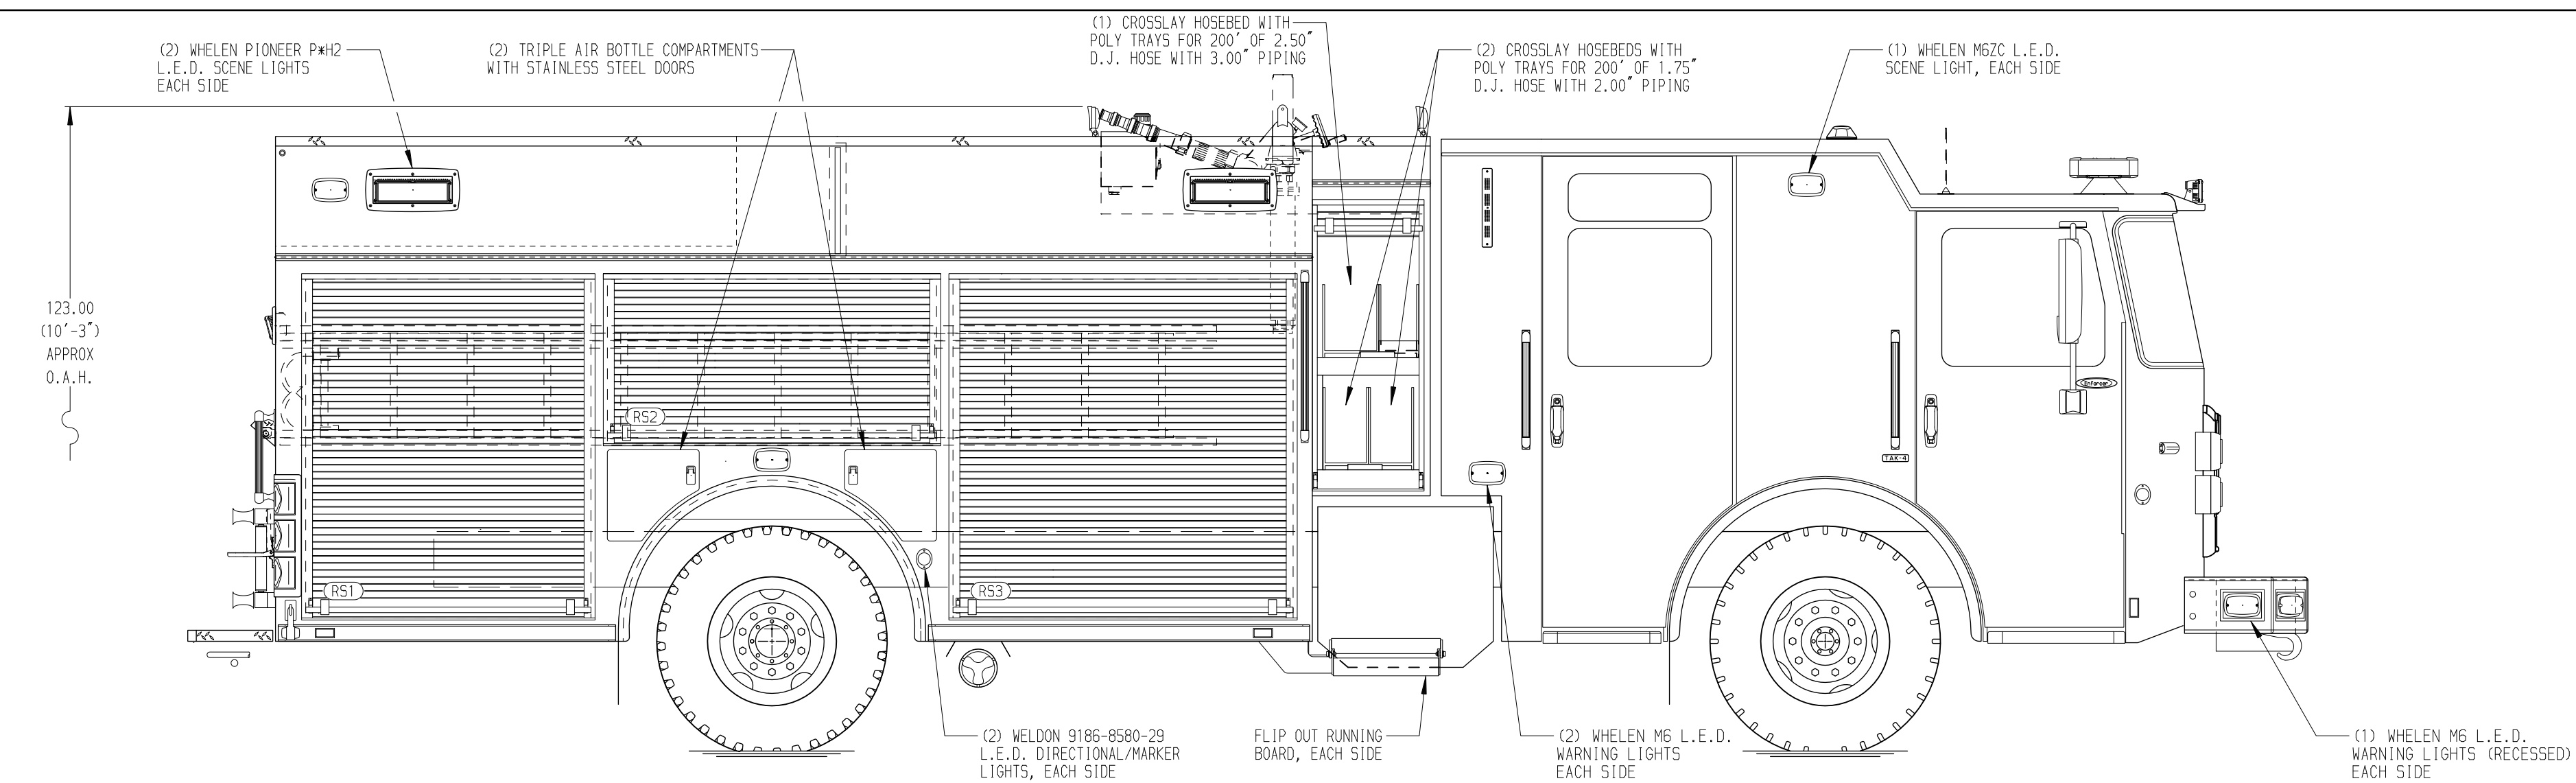

- HOSEBED CAPACITIES
- ① OPEN
 - ② 1000' OF 5.00" RUBBER HOSE
 - ③ 300' OF 1.88" KEY HOSE
 - ④ 300' OF 1.88" KEY HOSE
 - ⑤ 500' OF 3.00" D.J. POLY HOSE

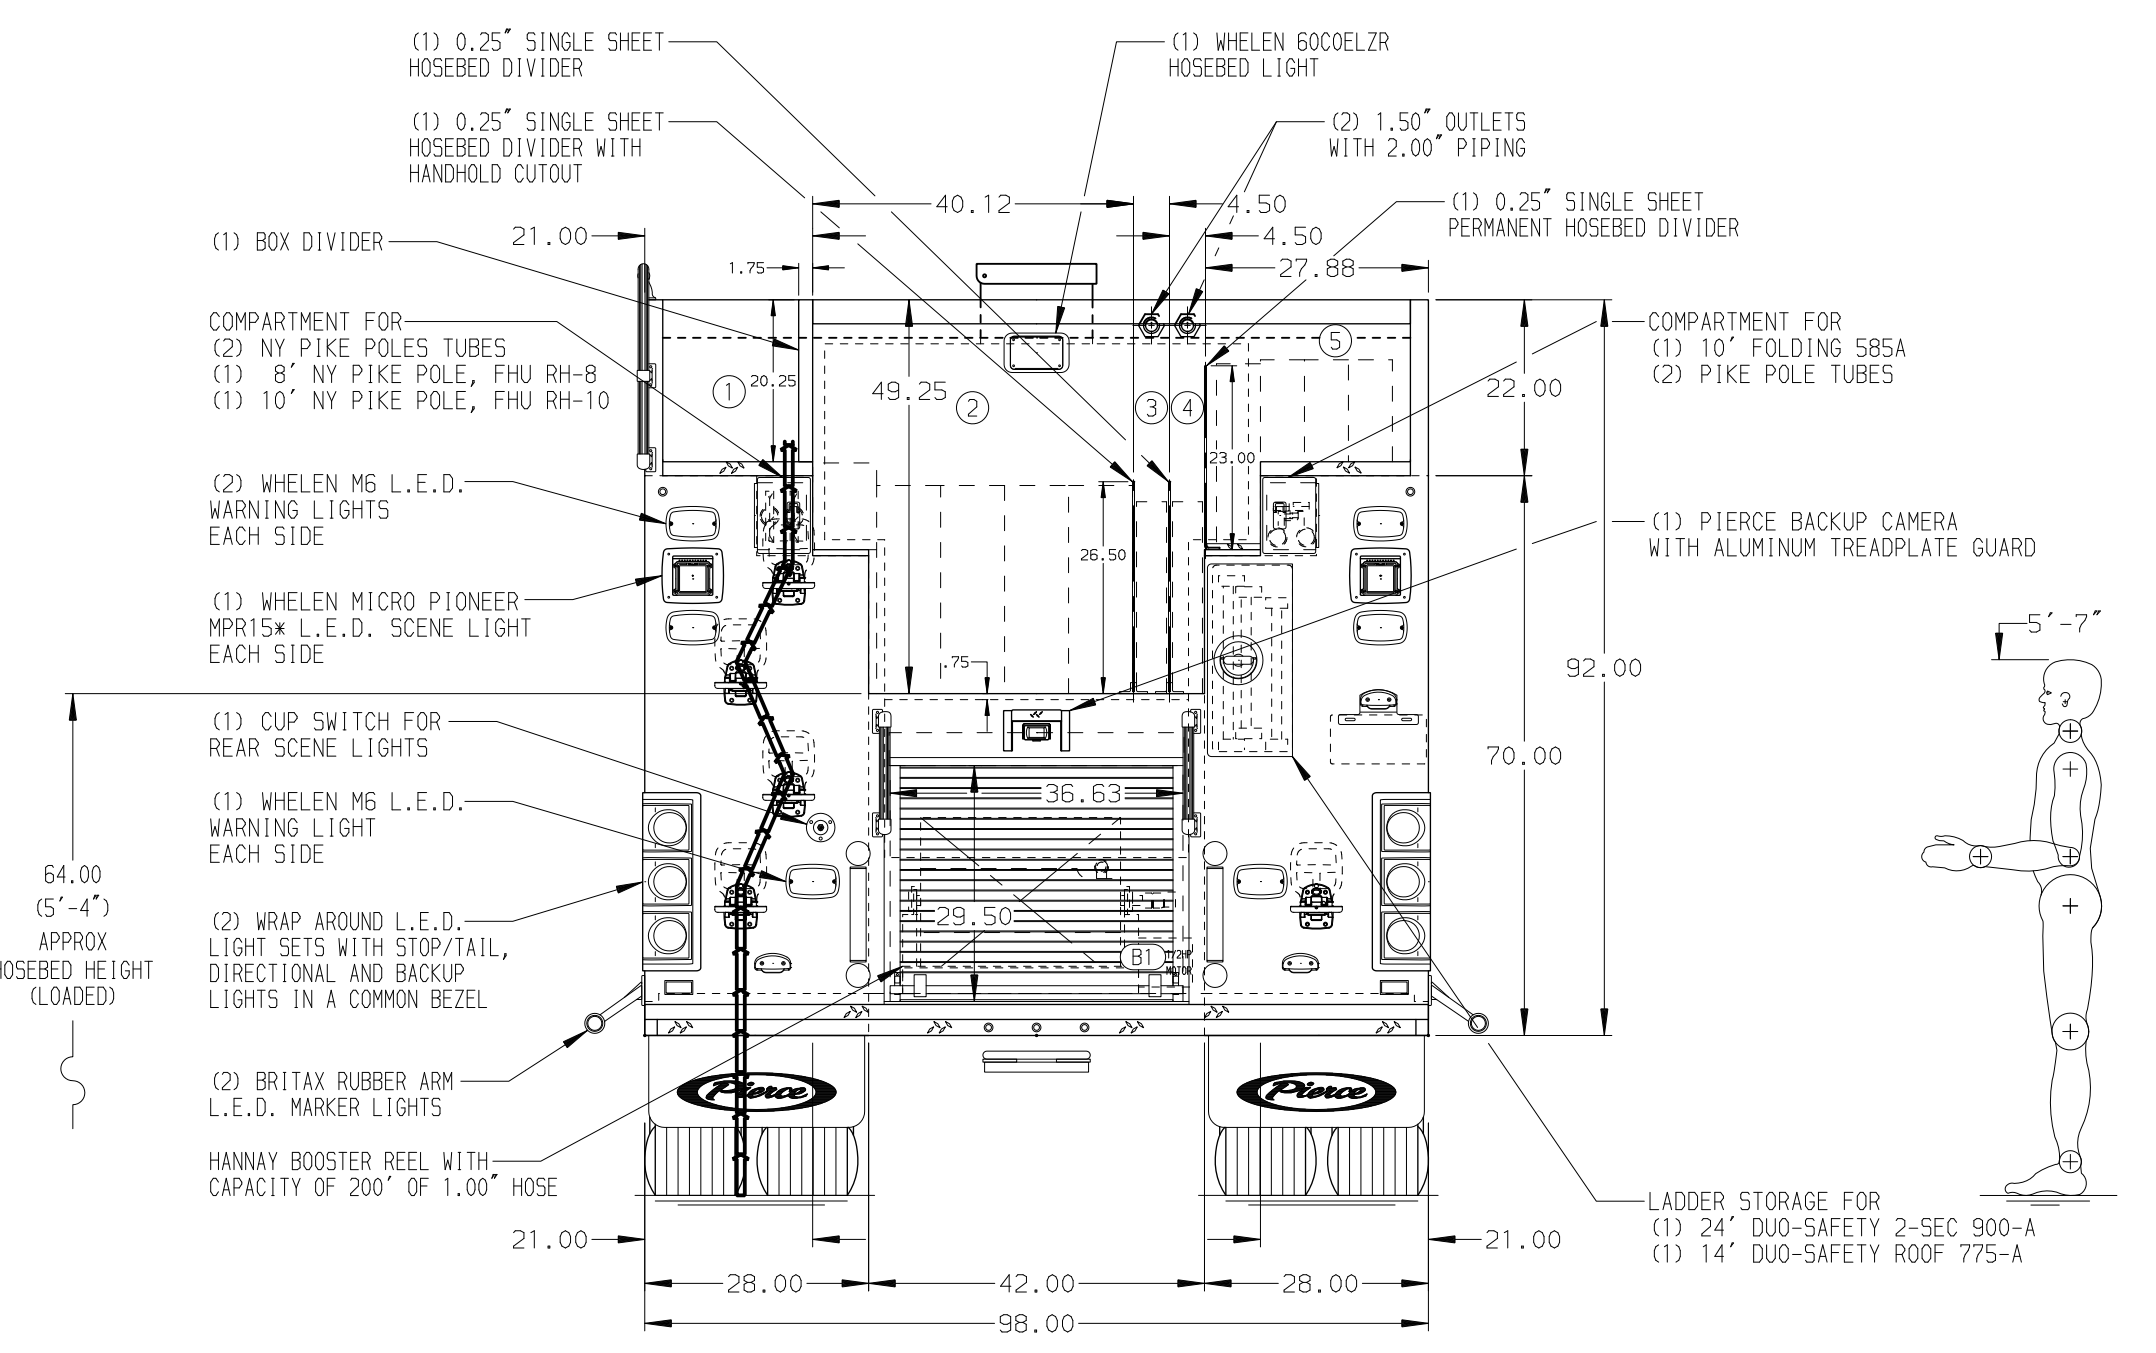

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED PER ORDER
2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER'S SIDE STEPPWELL
4. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR

				CHASSIS DATA	TITLE 1500GPM, 750G WATER, 30G FOAM 189" PUC, MUX FOR SPRINGDALE FIRE DEPARTMENT SPRINGDALE, ARKANSAS DWG NO. 39543AD	JOB NO. 39543
				MAKE PIERCE		SCALE 1:24
				MODEL ENFORCER		DATE
10FEB25	JDA	TDC			DRAWN BY JDA	030CT24
07JAN25	JDA	TDC			CHECKED BY WKL	010CT24
26NOV24	JDA	TDC			SHEET SIZE D	SHEET NO. 1 OF 1
REV	DATE	BY	CH	ENFORCER		