

PUMPER

BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

18,000 Lb Dana Axle

AXLE, REAR

24,000 Lb Dana Axle

ENGINE

455 HP Cummins X12 Engine

TRANSMISSION

Allison 6th Gen, 4000 EVS P

BUMPER

19" Extended Painted Steel

CAB

6010 Enforcer Cab

BODY

TOTAL TANK CAPACITY

500 Gallon Poly Tank

WATER CAPACITY

500 Gallons of Water

FOAM CELL

30 Gallons of Foam

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

161" RollUp Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" Lap Low FDLER

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

Speedlays Not Required

GENERATOR


Generator Not Required

FOAM SYSTEM

Husky 3 Single Agent Foam System

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN LEFT BUMPER TRAY
2. 30A KUSSMUL SHORELINE RECEPTACLE LOCATED ON DRIVER SIDE OF THE CAB
3. BATTERY CHARGER LOCATED PER ORDER LOCATED PER ORDER

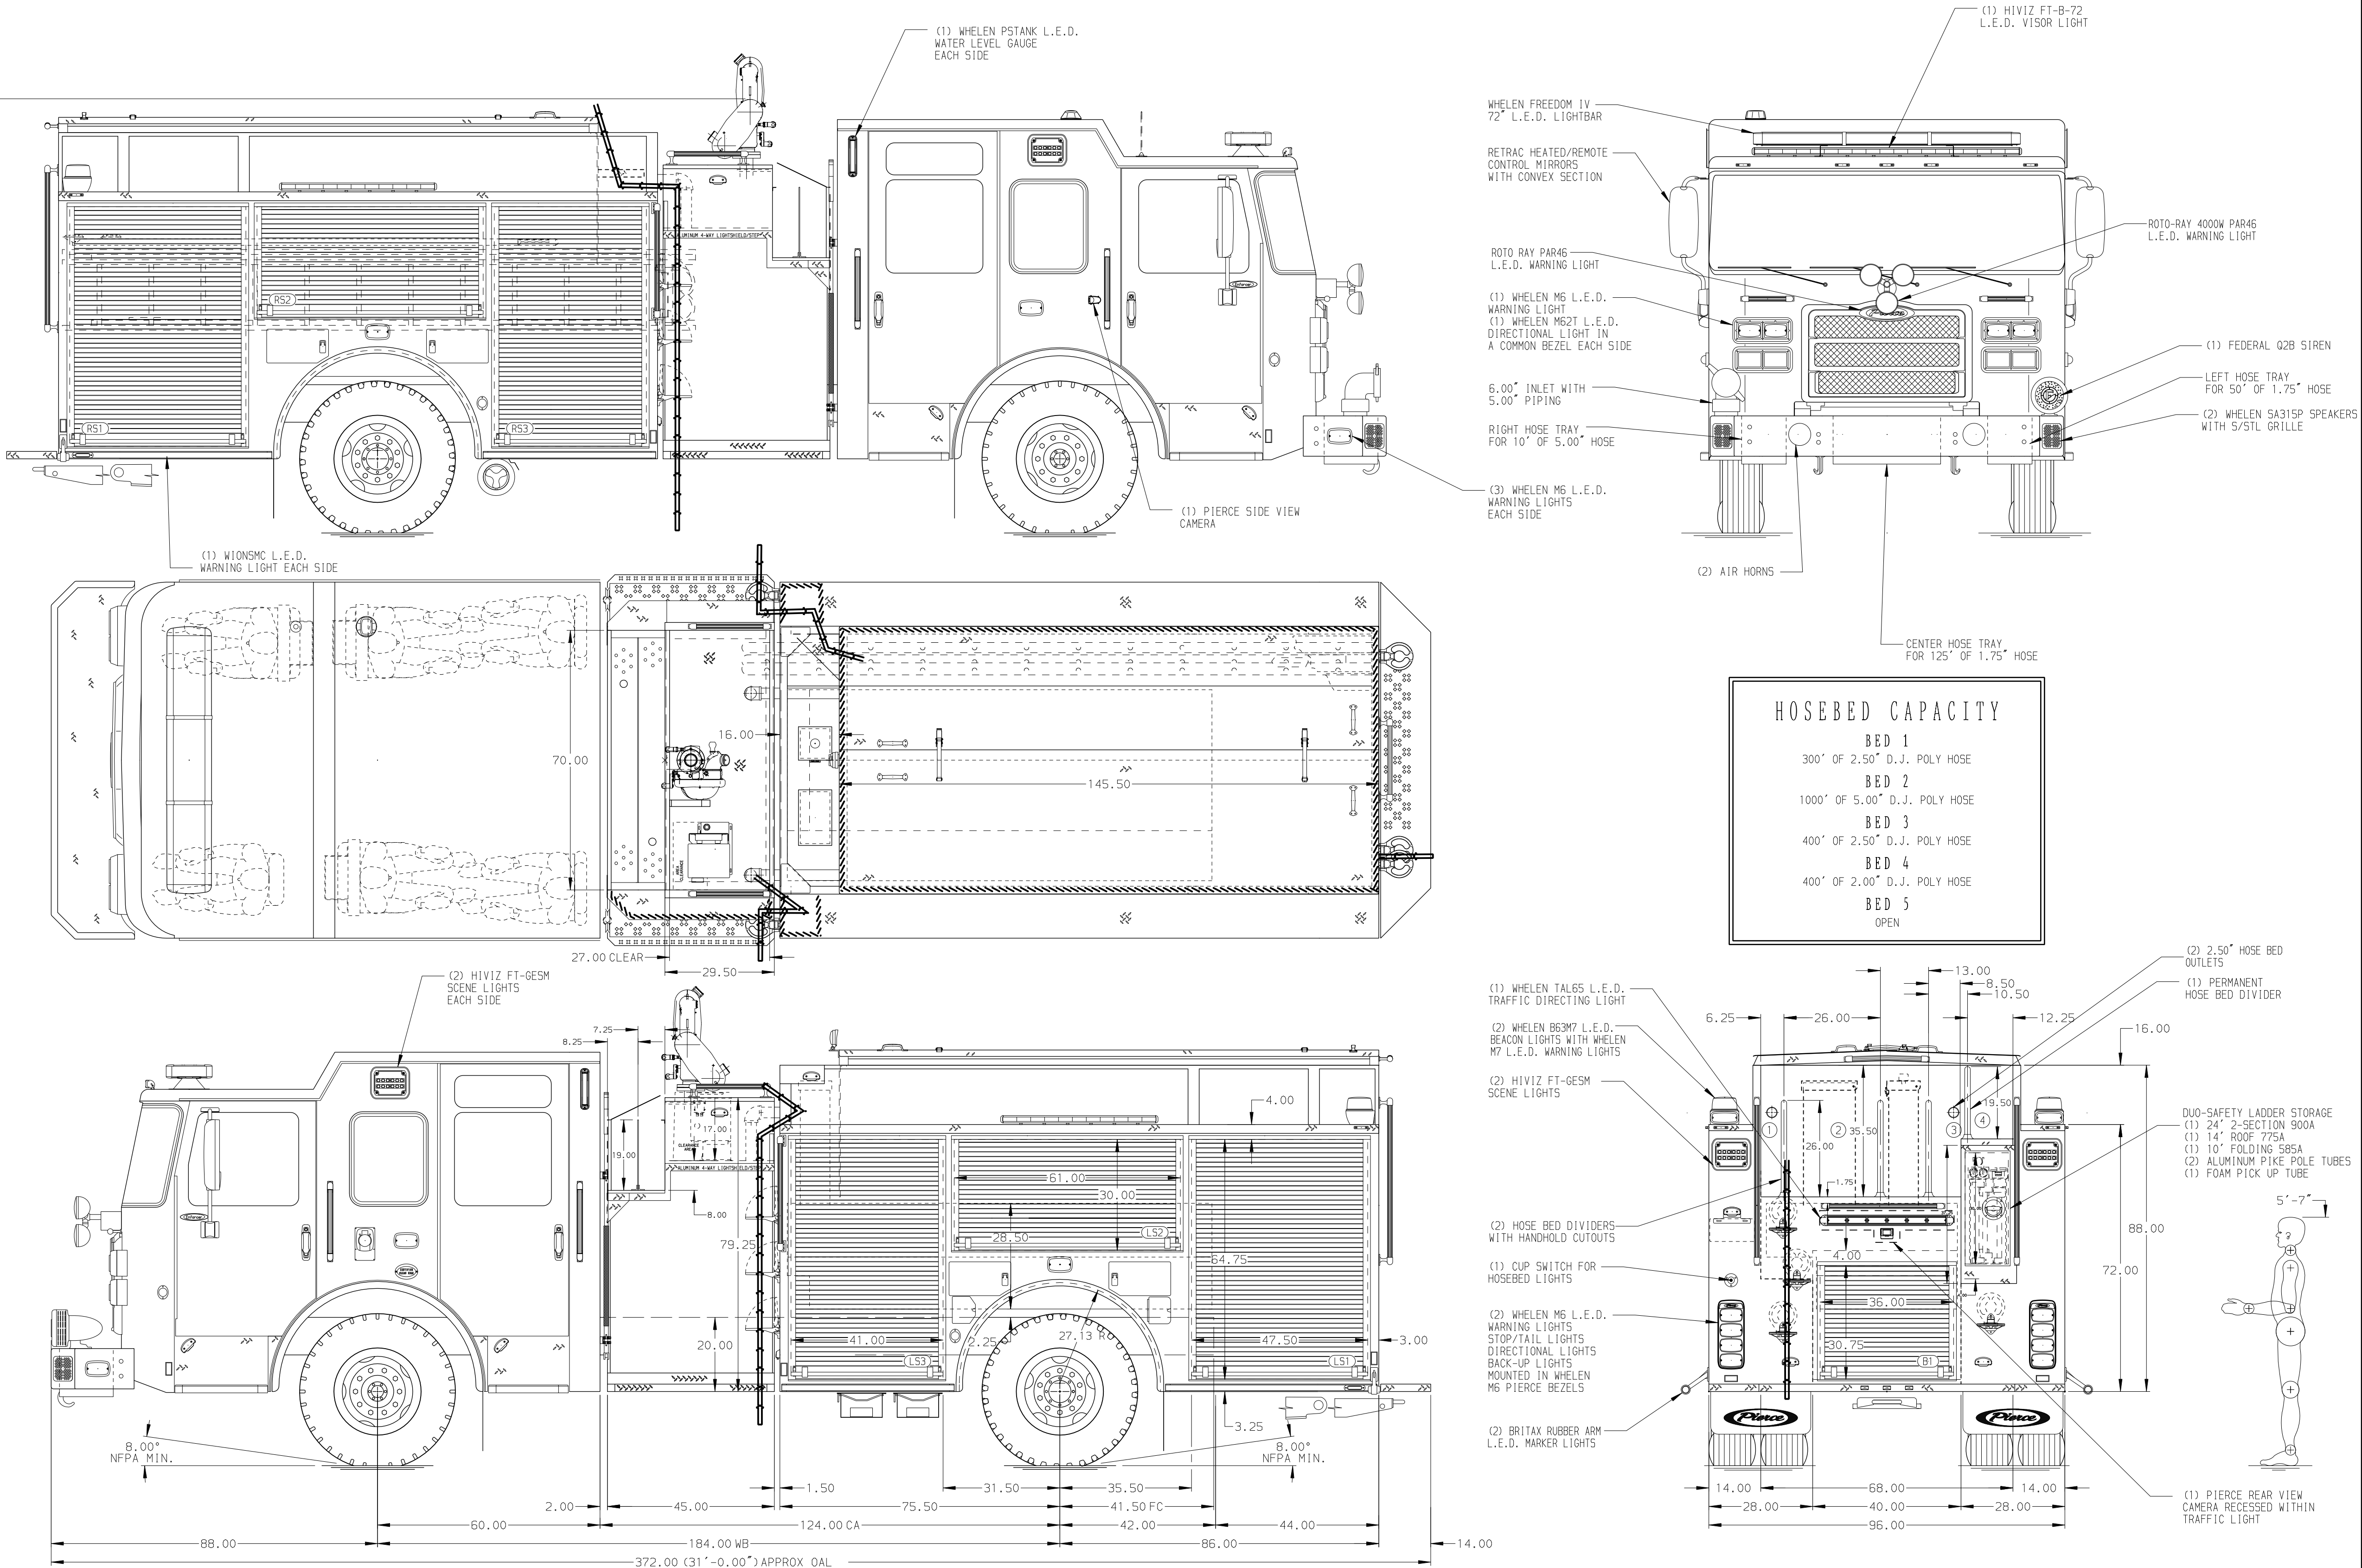

Pierce MANUFACTURING INC.		JOB NO.	39544
		SCALE	DATE
		1:24	
		DRAWN BY	21AUG24
		BTH	
		CHECKED BY	23AUG24
		MMF	
		SHEET SIZE	SHEET NO.
		D	1 OF 1

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
				MAKE	FOR	-
				PIERCE		City of Gallatin
				MODEL	DWG NO.	
				ENFORCER		
REV	DATE	BY	CH			

39544AD