



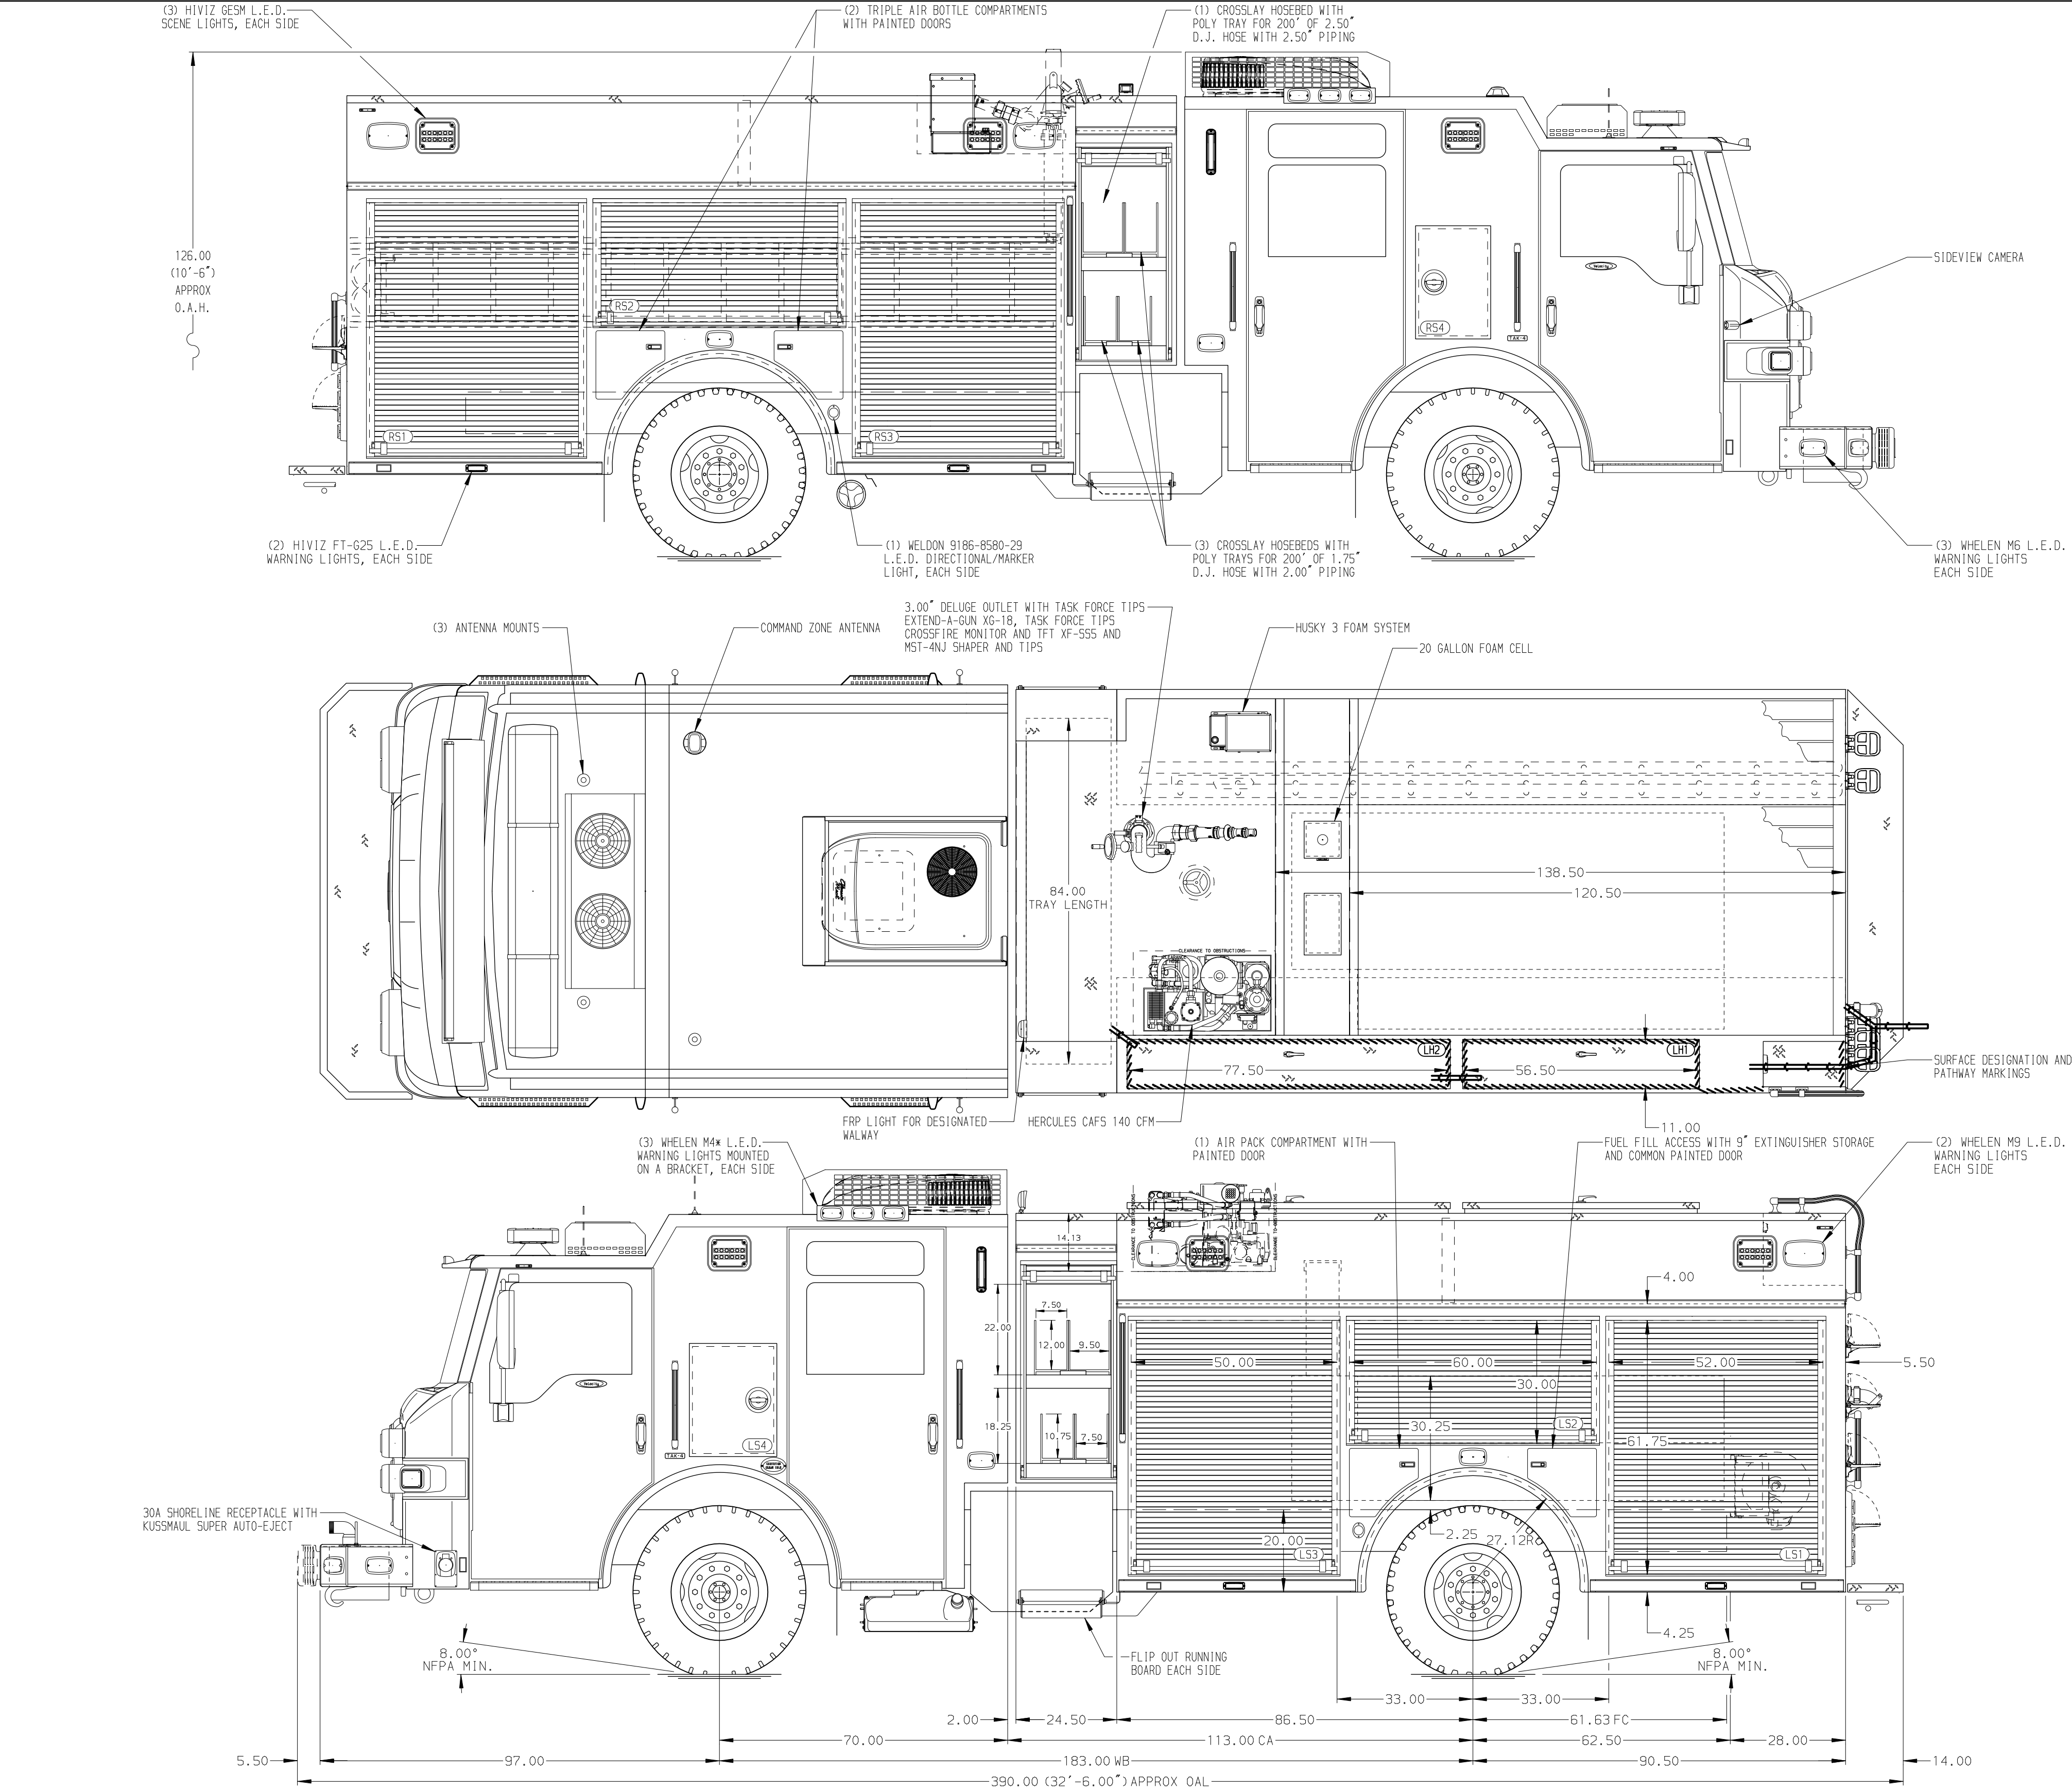

- HOSEBED CAPACITIES
- ① 200' OF 2.50" D.J. POLY HOSE
 - ② 400' OF 3.00" D.J. POLY HOSE
 - ③ 700' OF 5.00" D.J. POLY HOSE
 - ④ OPEN

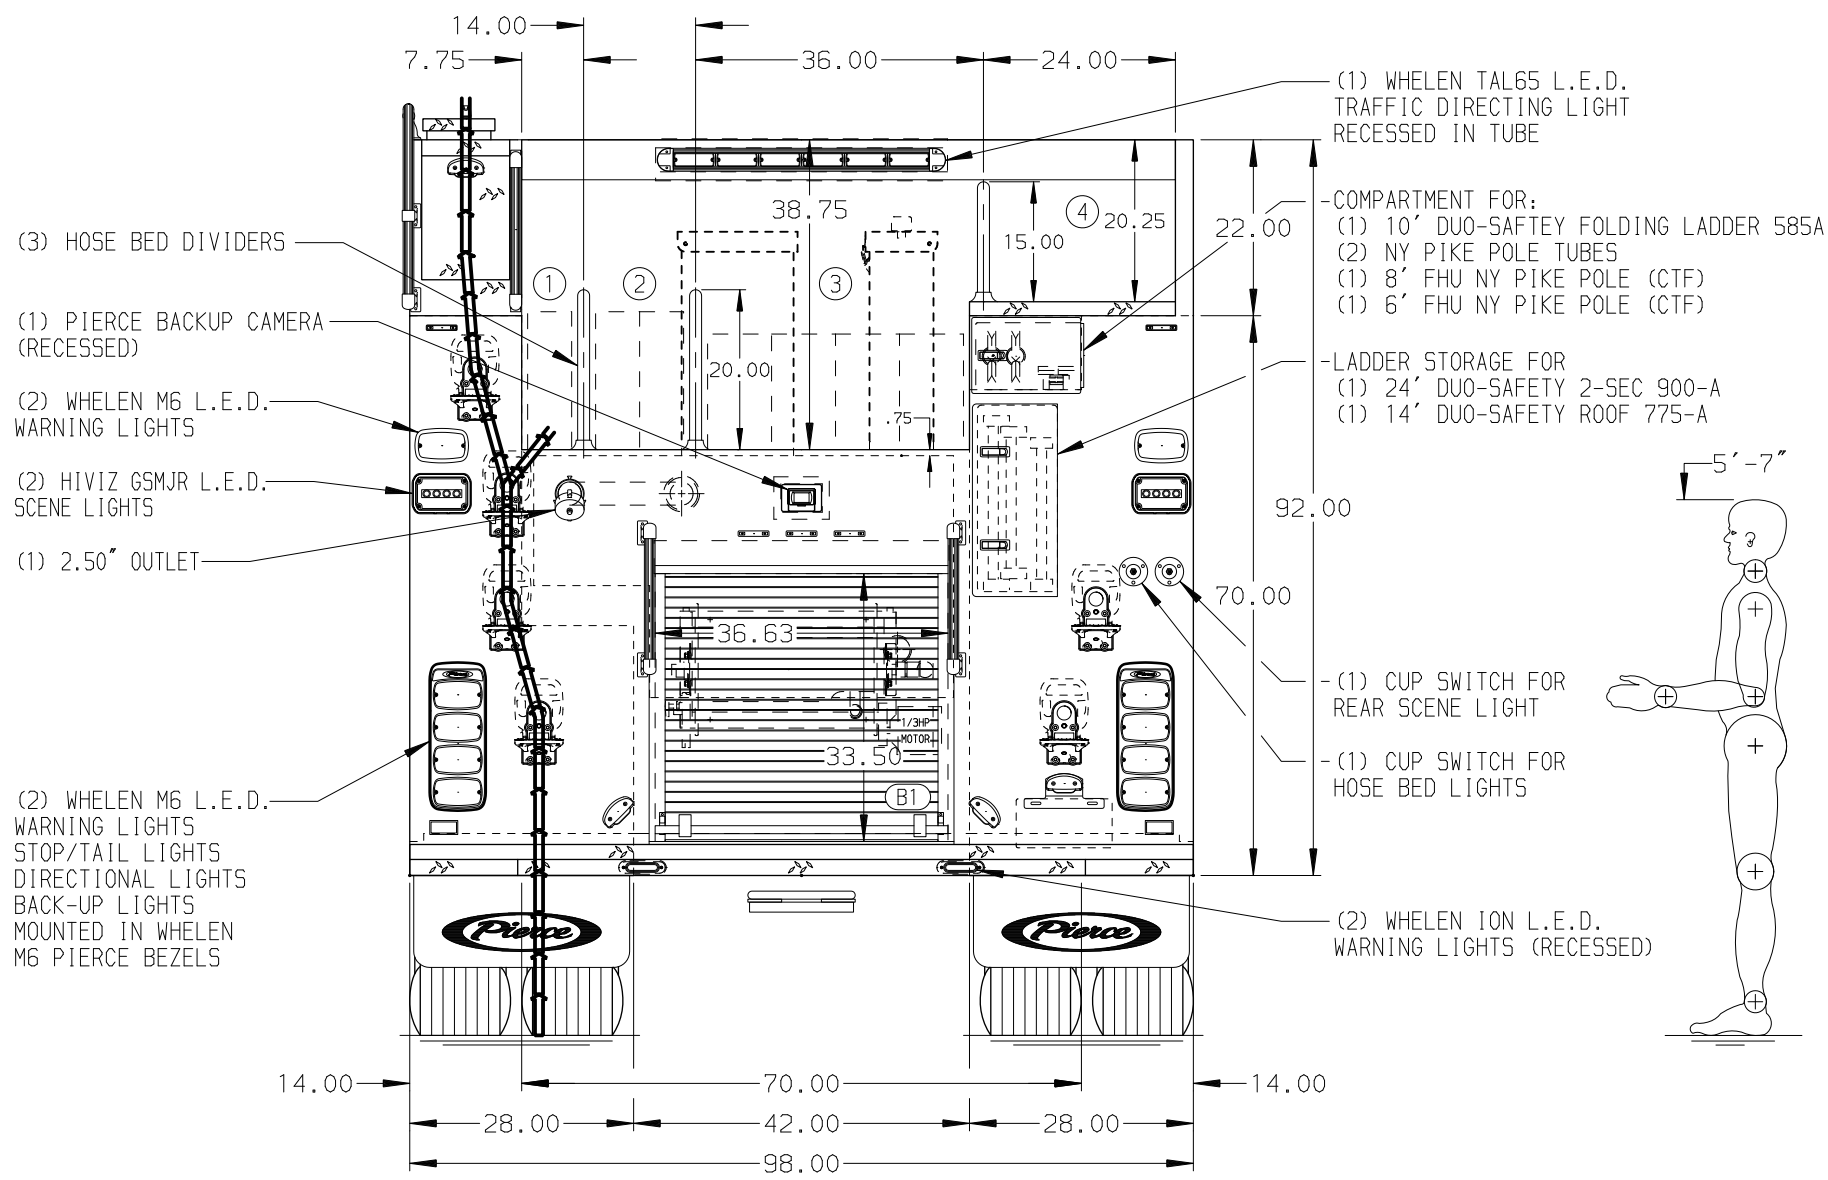

ALUMINUM BODY

- NOTE**
- DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.
- 1. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
 - 2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE OPERATOR'S PANEL
 - 3. BATTERY CHARGER LOCATED PER ORDER
 - 4. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
 - 5. DEF TANK MOUNTED UNDER CAB ON THE DRIVER'S SIDE
 - 6. HANMAY BOOSTER REEL MODEL SBEF4130-17-18 LOCATED IN B1 WITH CAPACITY FOR 150' OF 0.75" BOOSTER HOSE
 - 7. WHEEL CHOCKS AND MOUNTING BRACKETS TO BE PROVIDED BY CUSTOMER

REV	DATE	BY	CH	VELOCITY FR
1	05AUG25	JER	COS	MAKE
2	27MAY25	JER	COS	PIERCE
3	02MAY25	JDA	COS	MODEL

		JOB NO.	39671
TITLE		SCALE	DATE
FOR		DRAWN BY	17FEB25
DWG NO.		CHECKED BY	17FEB25
39671 AD		SHEET SIZE	SHEET NO.
		D	1 OF 1