

Enforcer Chassis

27,000 lb Dana Axle

450 HP Cummins L9 Engine

ALLison 6th Gen, 3000 EVS P

19" Extended Painted Steel

7010 Enforcer Cab

1000 Gallon New York Style Poly Tank

970 Gallons of Water

30 Gallon Foam Cell

28.75" FF Rollup Rear Compt

152" Lap Full Height Front & Rear FDLER

152nd Lap Low FDLER

45" Control Zone Side Mount

1500 GPM Waterous CSU

(2) 1.50" Standard Capacity

2.50" CrossLay Not Required

Speedlays Not Required


Generator Not Required

Husky 3 Single Agent Foam System

Side Roll and Frontal Impact Protection

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
3. BATTERY CHARGER LOCATED PER ORDER
4. TWO PARTITIONS LOCATED PER ORDER
5. FIVE 120V RECEPTACLES LOCATED PER ORDER
6. ONSPOUT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
7. KUSSMAUL AIR COMPRESSOR LOCATED PER ORDER

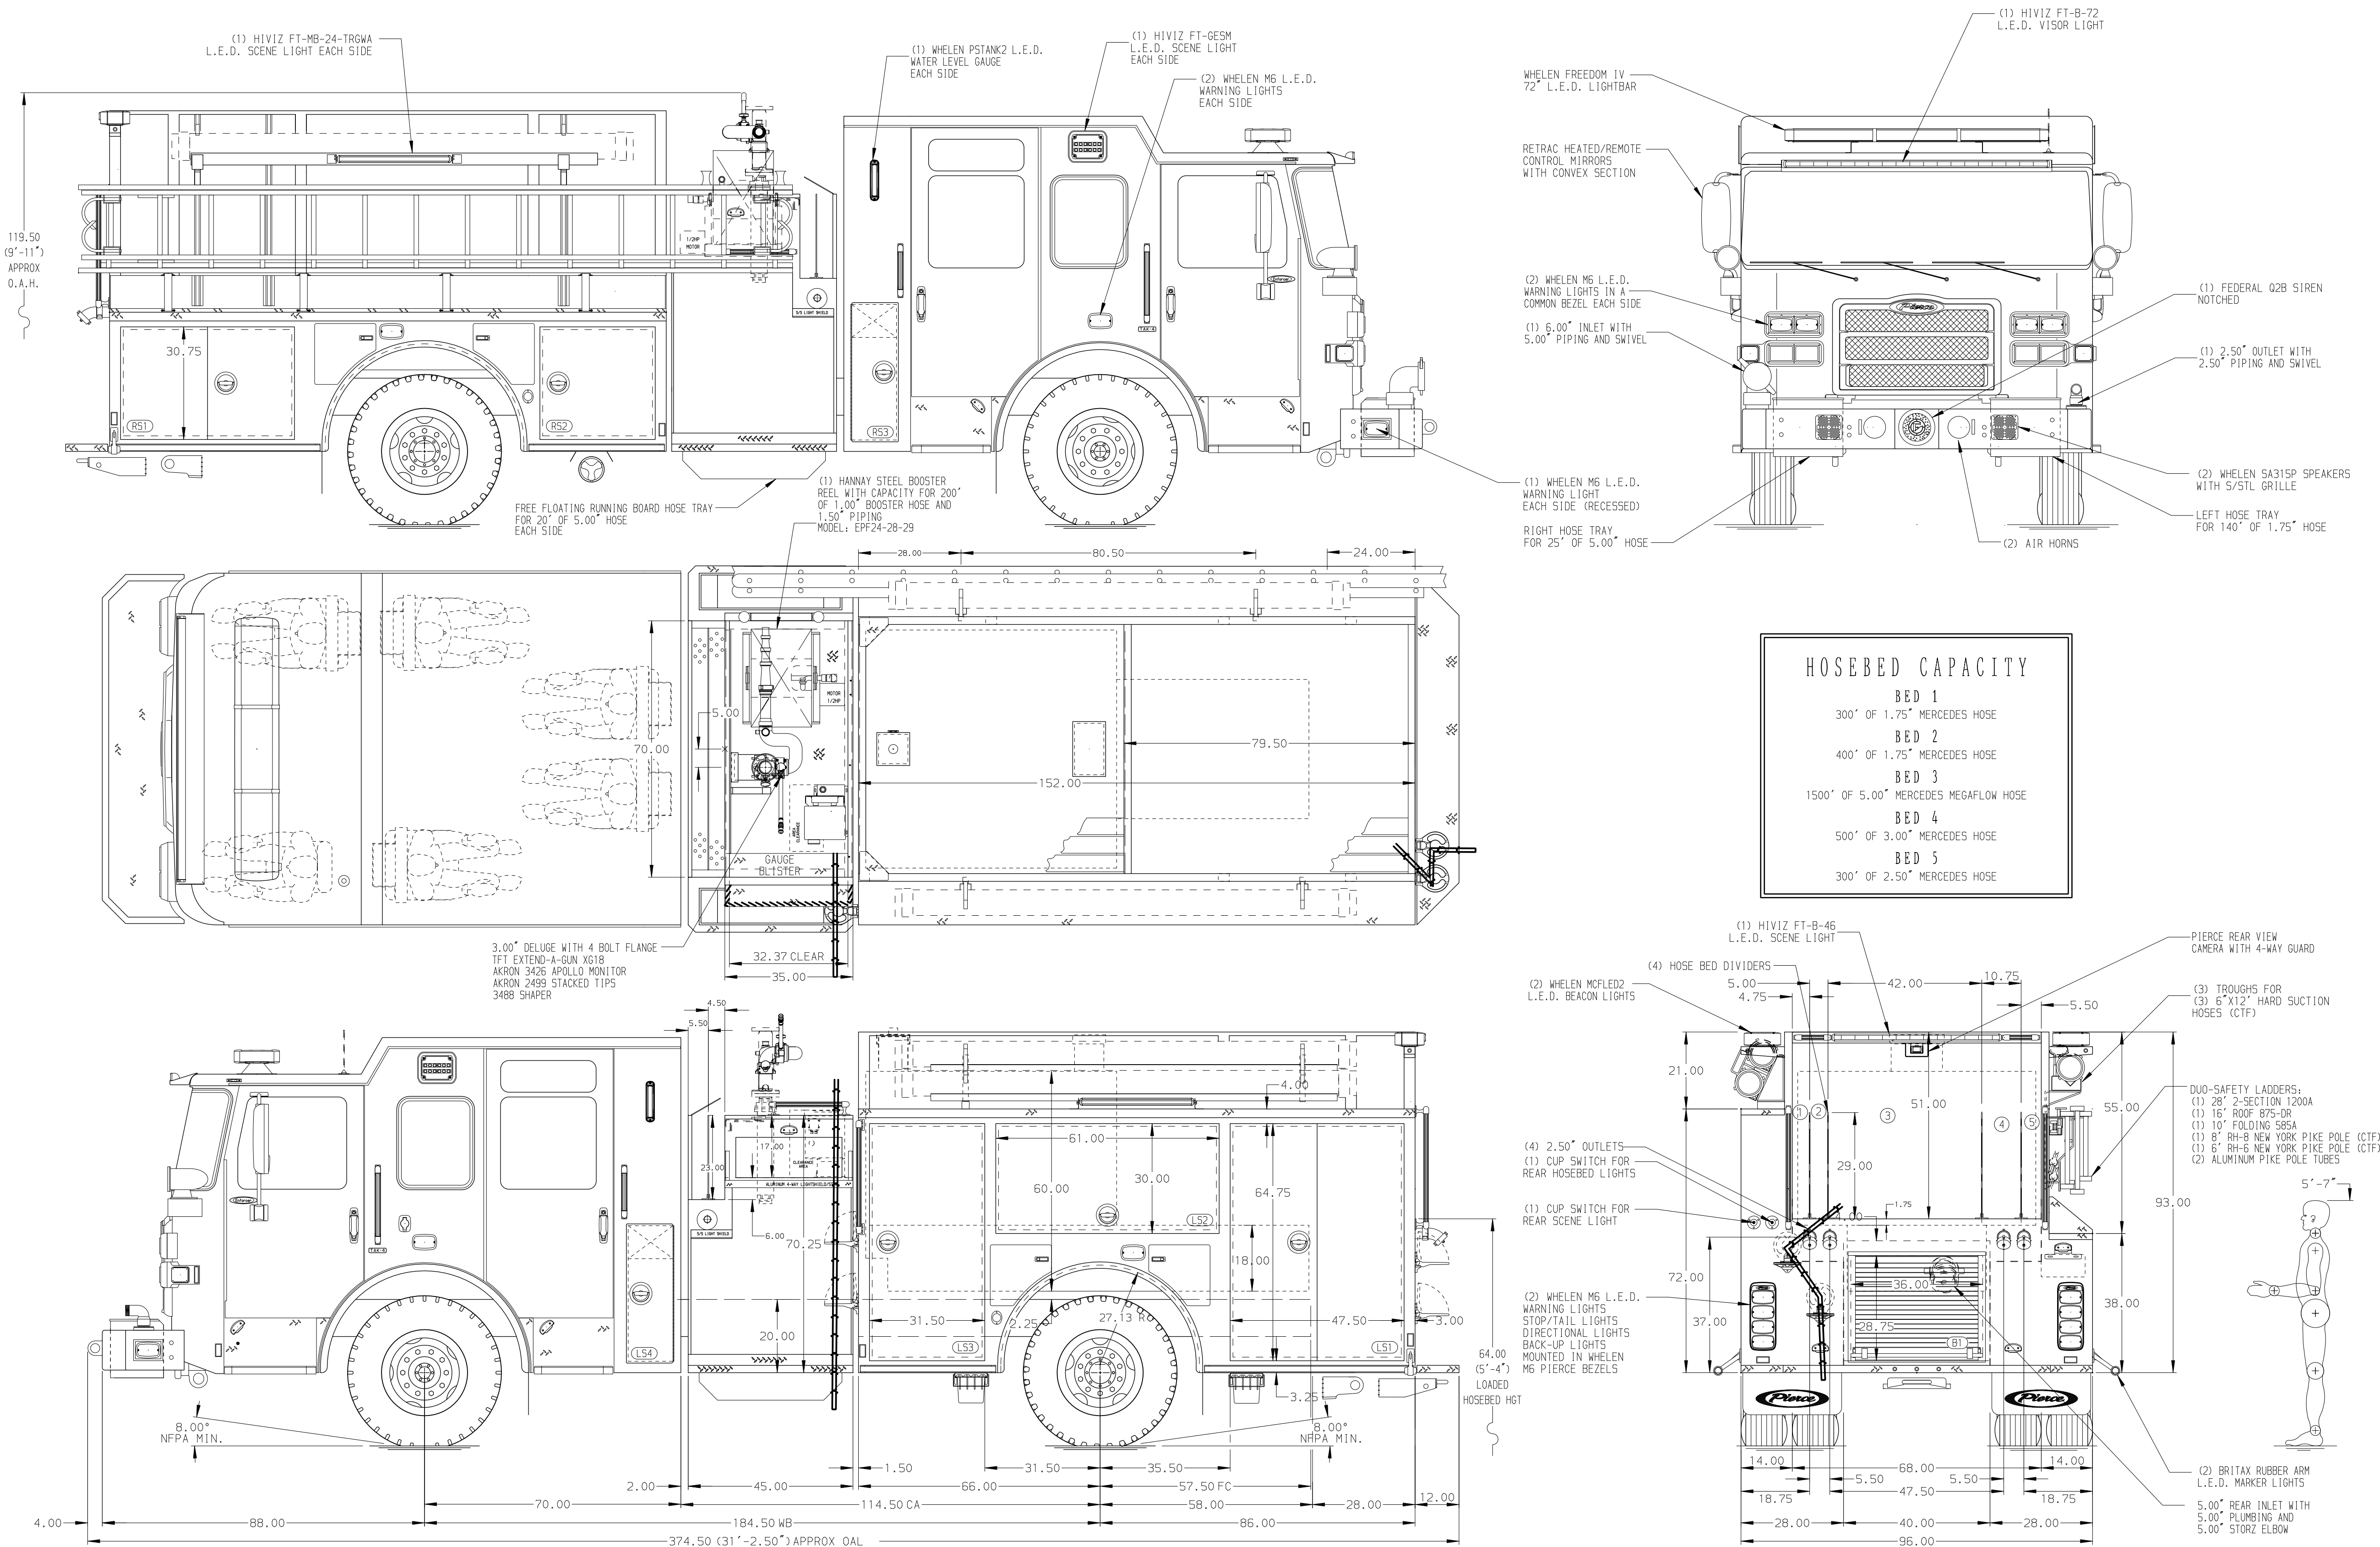

15AUG24	JAM	CSH	CHASSIS DATA	
18MAR24	JAM	CSH		
25JAN24	MMF	CSH	MAKE	
24JAN24	MMF	CSH	PIERCE	
23JAN24	MMF	CSH	MODEL	
REV	DATE	BY	CH	ENFORCER

 MANUFACTURING INC.		JOB NO.	39725
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY JAM	07NOV23
FOR	Harleysville Community Fire Company	CHECKED BY MMF	10NOV23
DWG NO.	39725AD	SHEET SIZE D	SHEET NO. 1 OF 1