

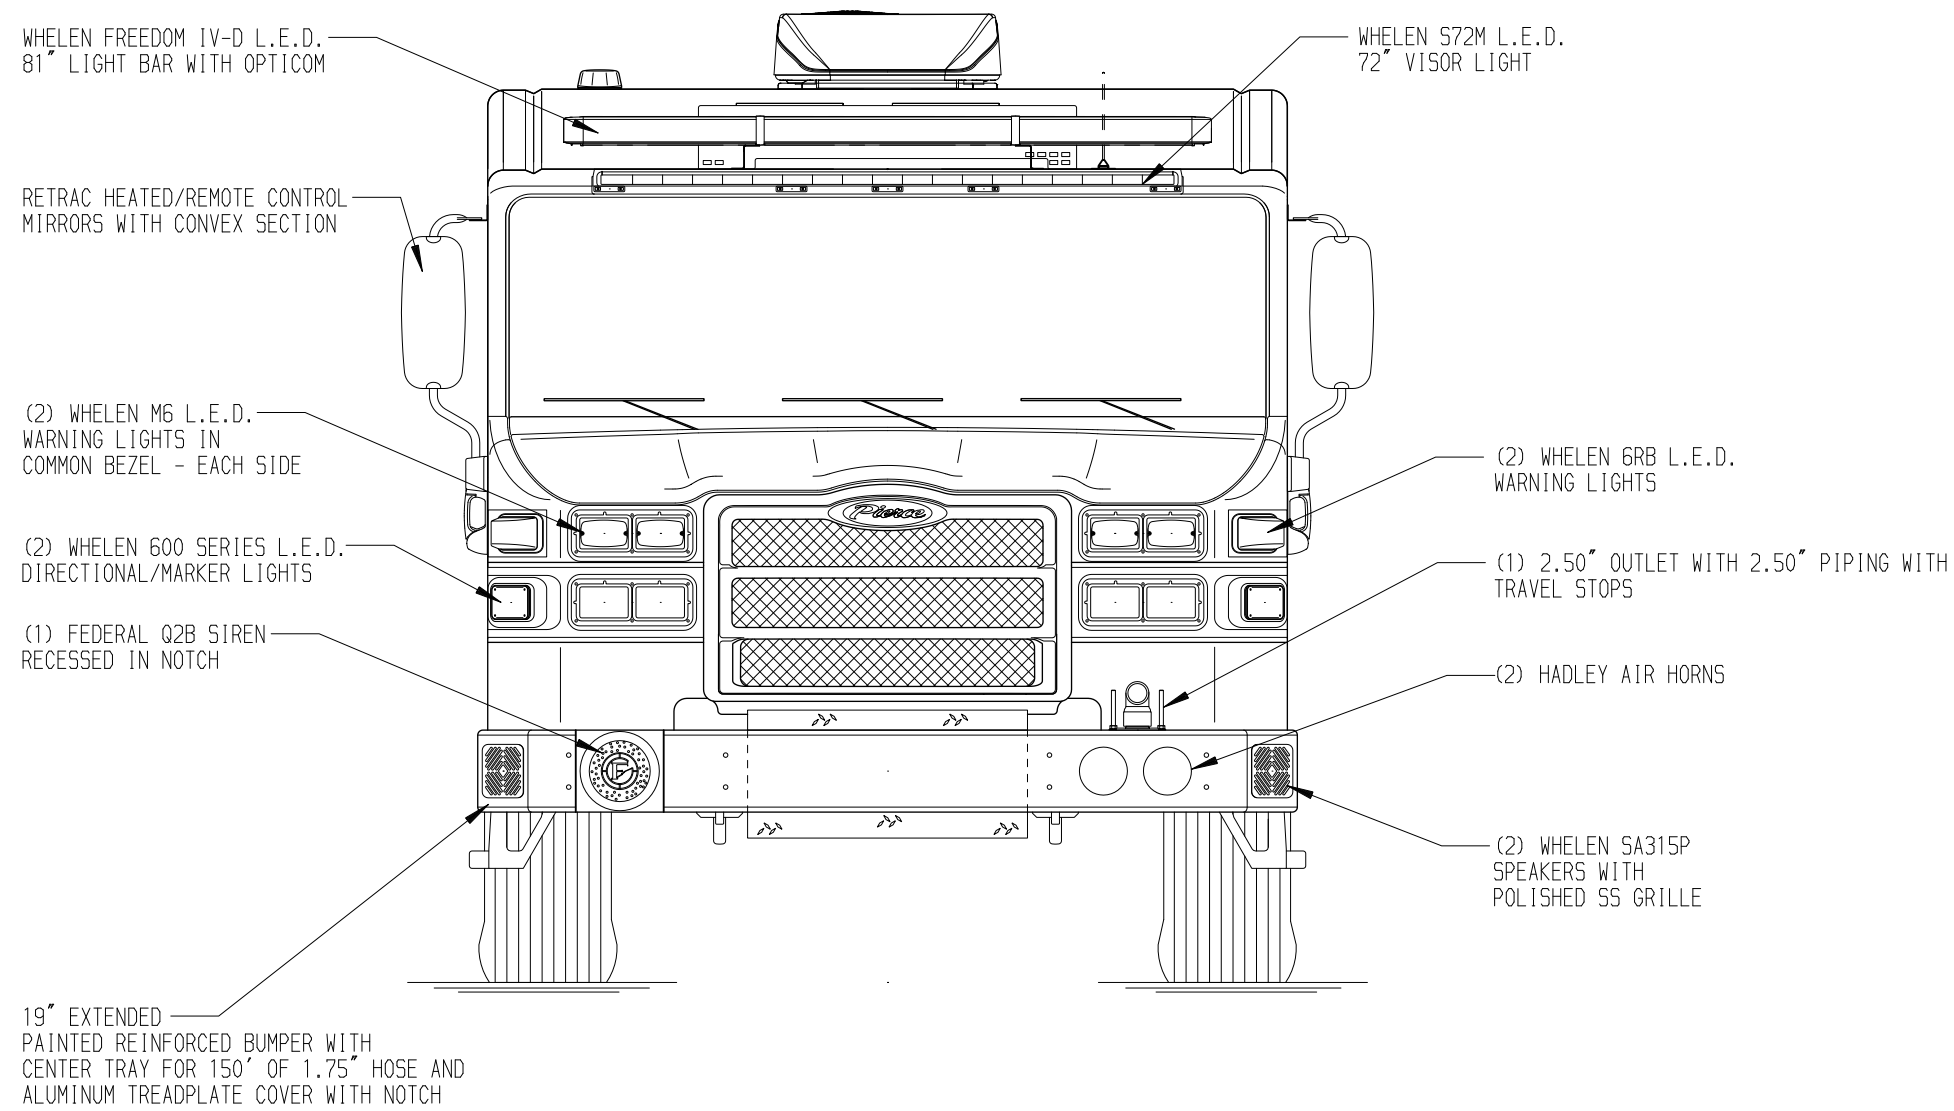
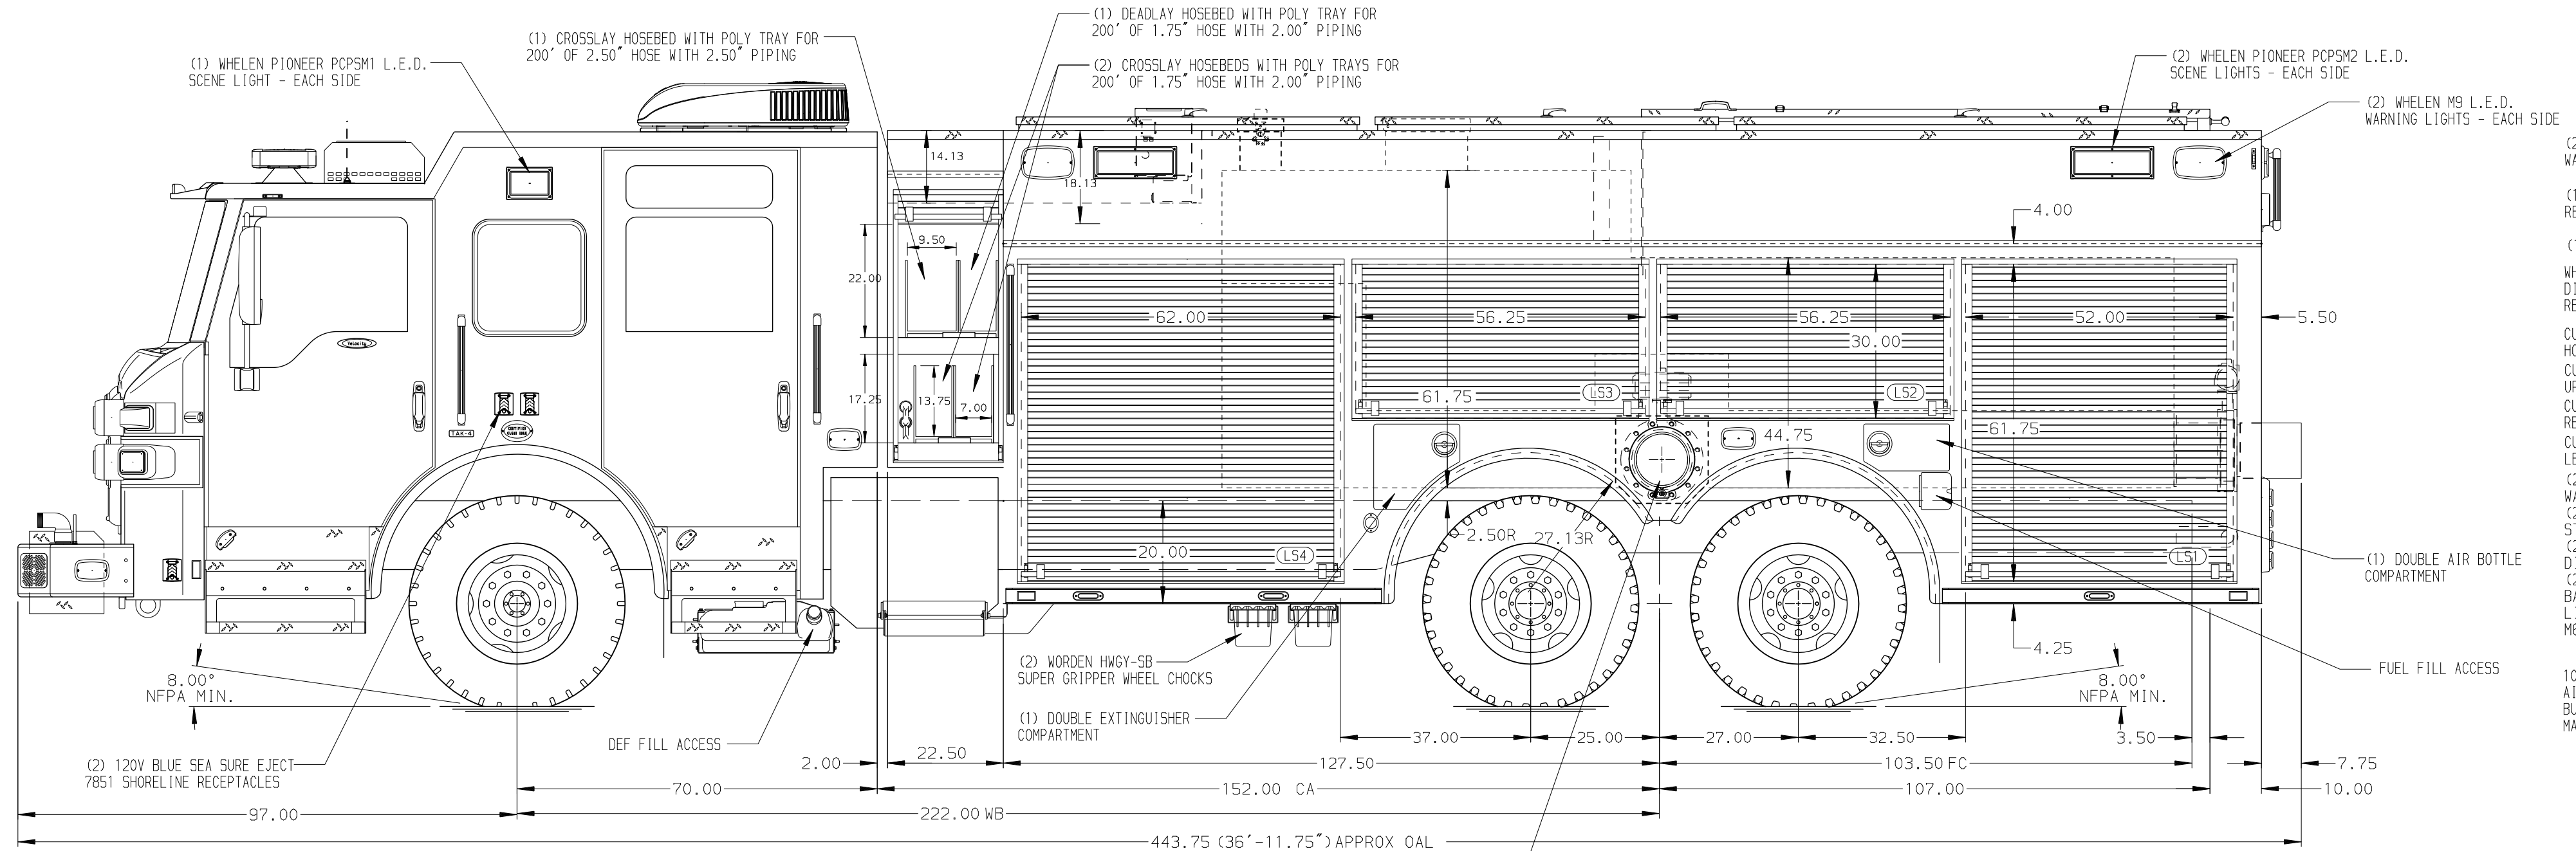
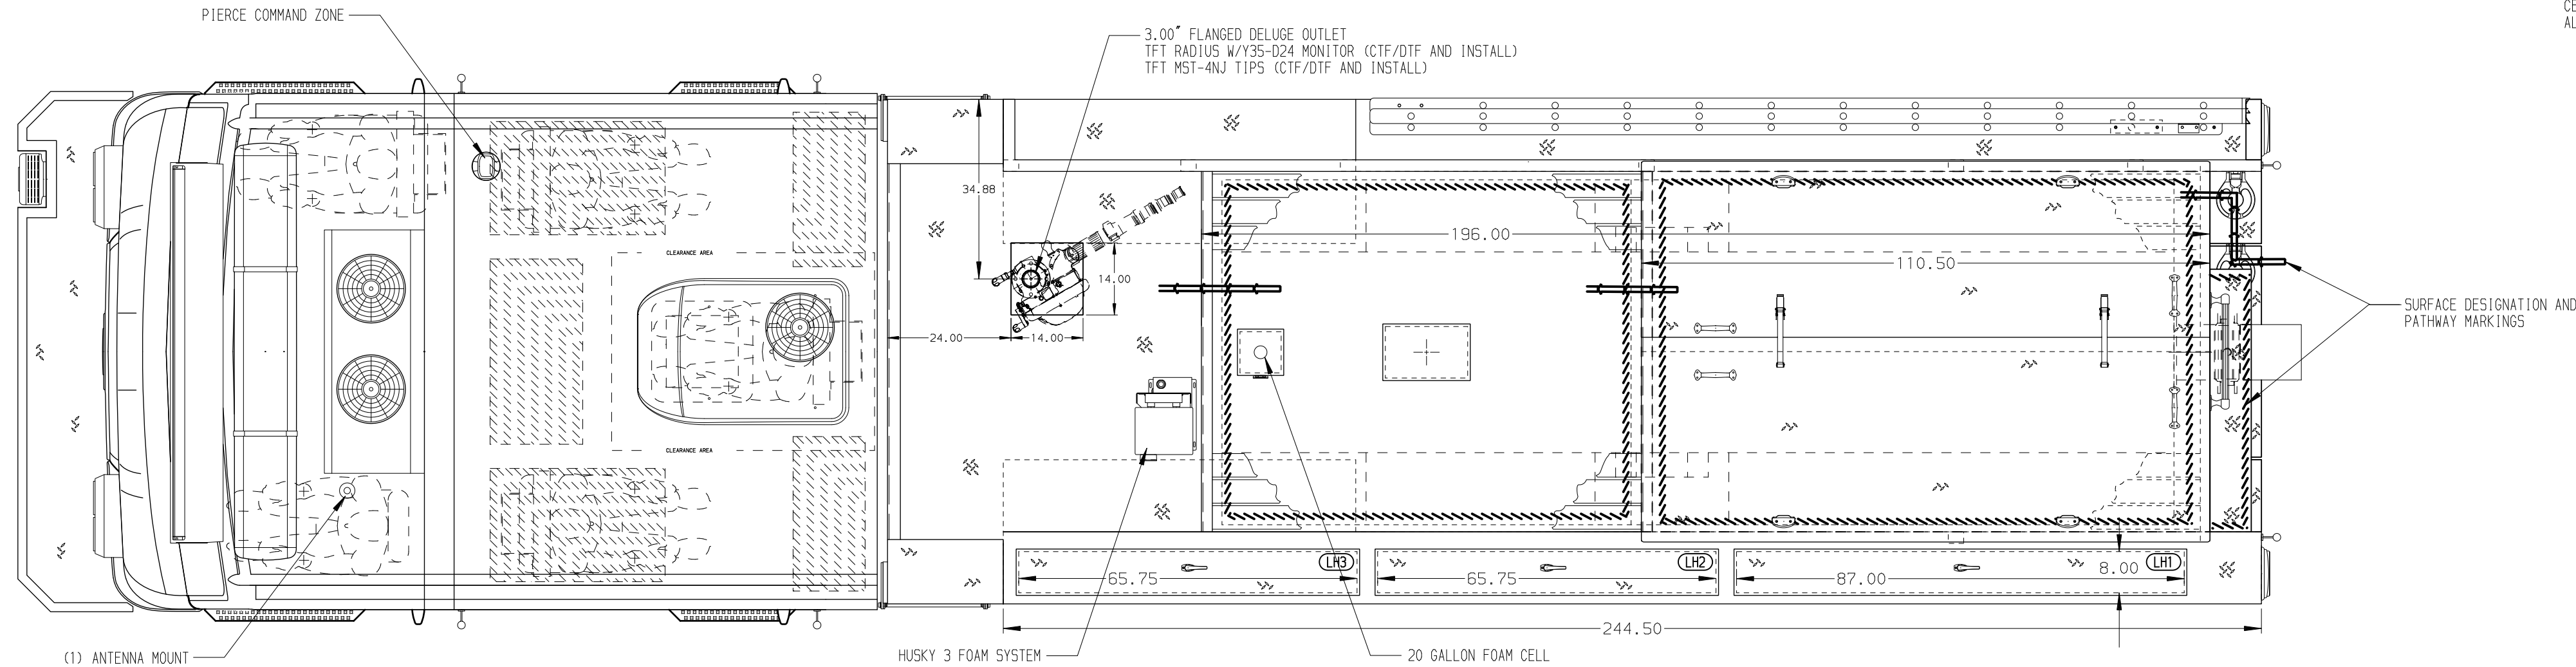


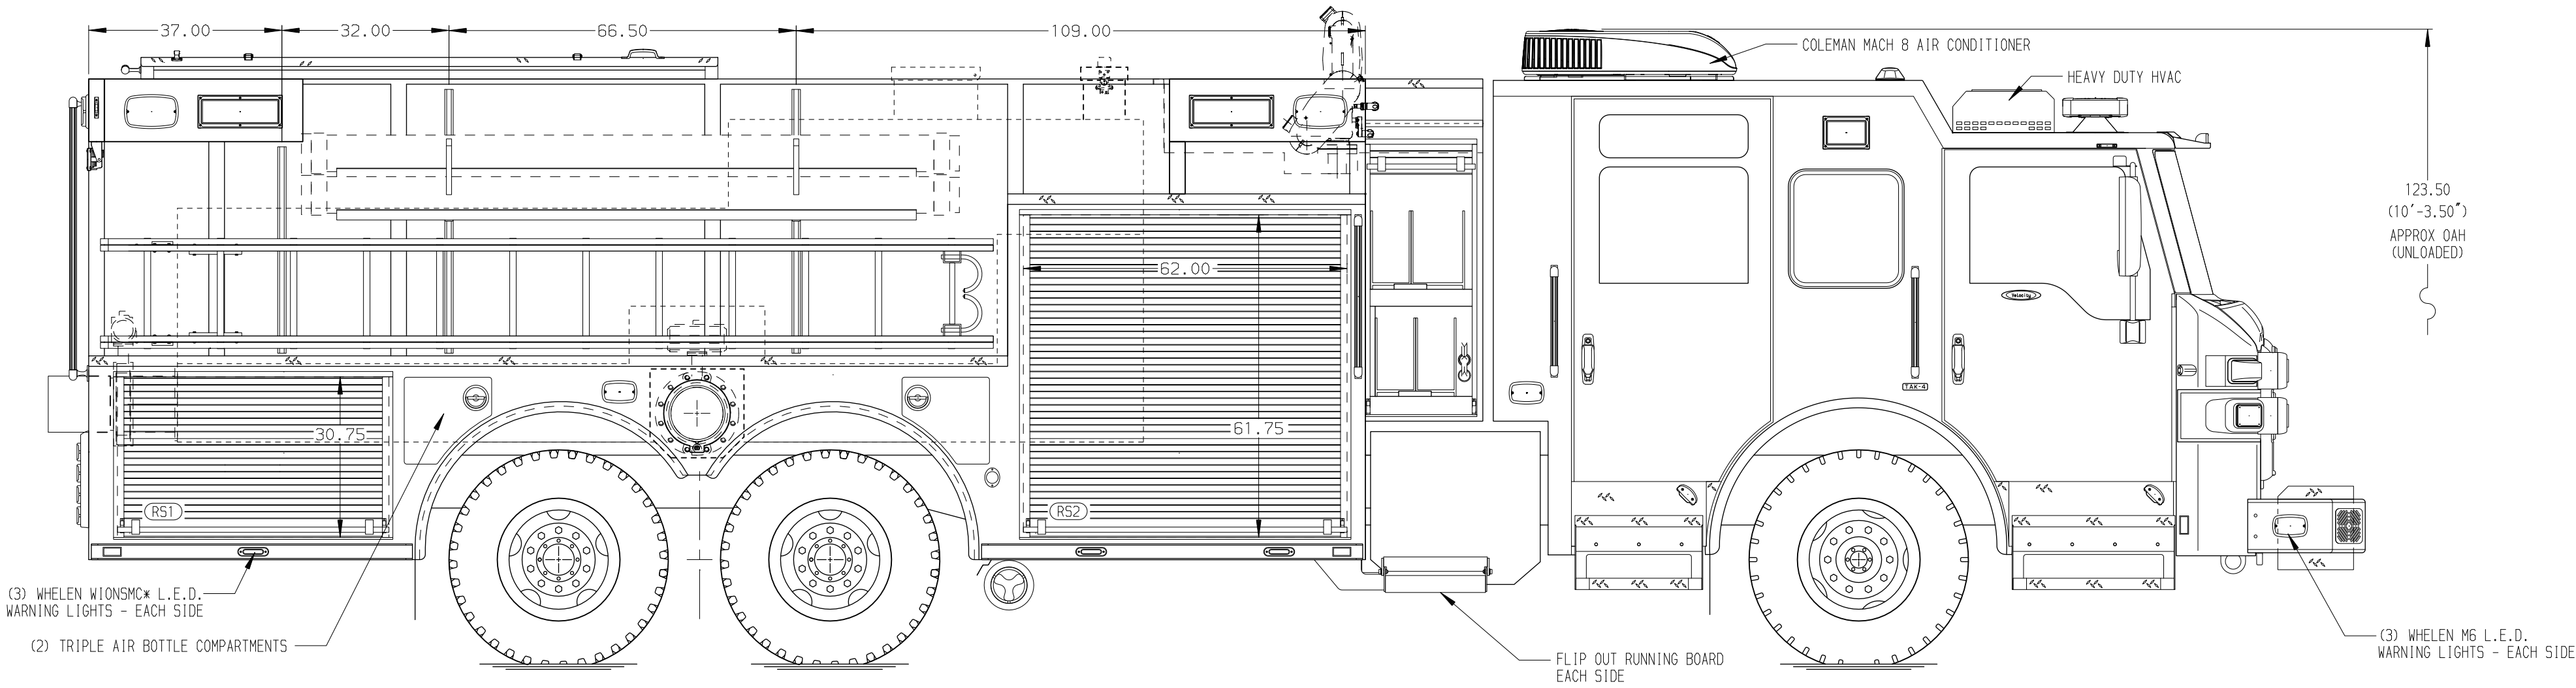

HOSEBED CAPACITIES

- ① - 250' OF 2.50" DJP HOSE
- ② - 1300' OF 3.00" DJP HOSE
- ③ - 1000' OF 5.00" DJP HOSE

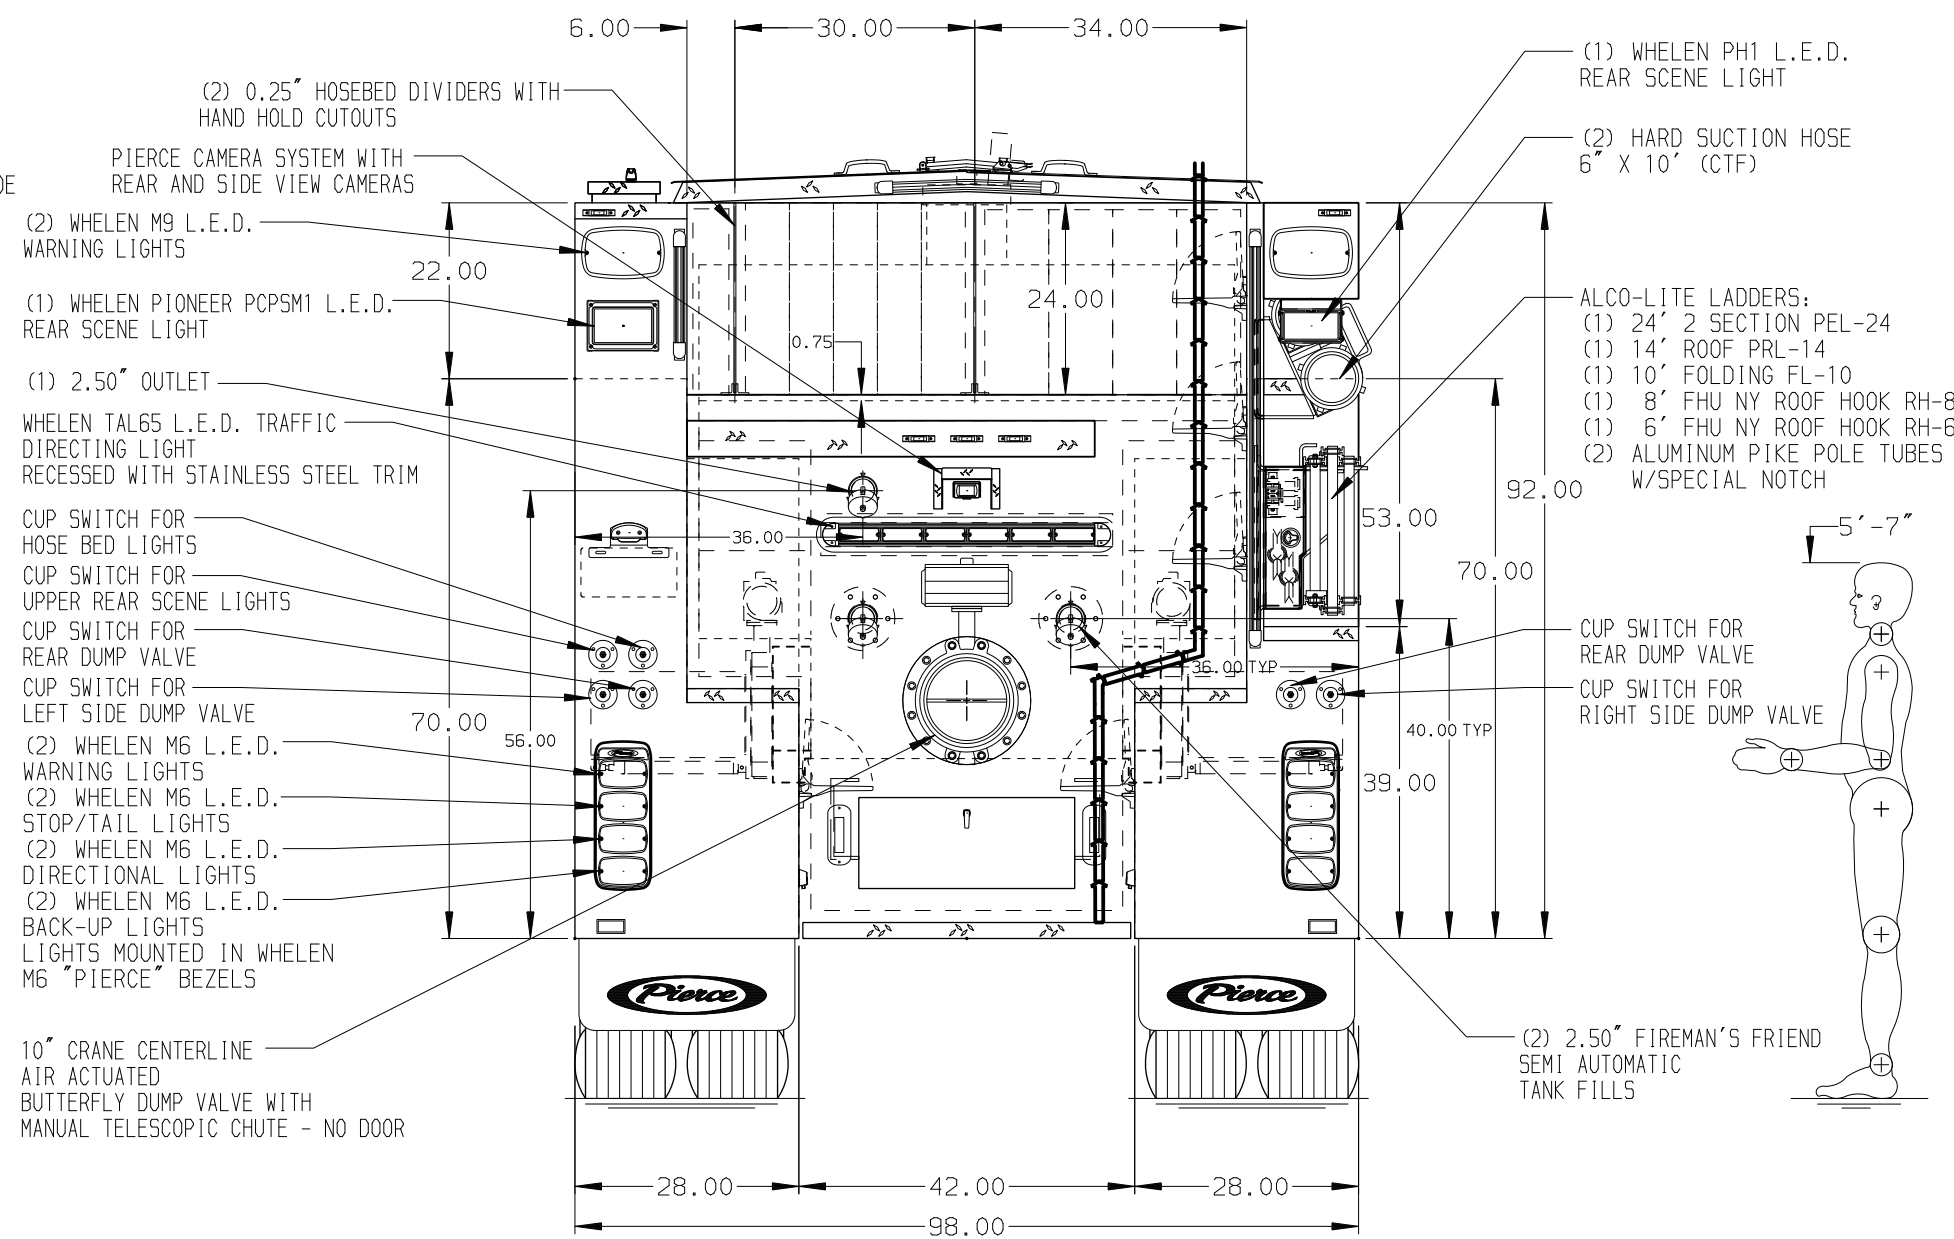

ALUMINUM BODY

MAXIMUM O.A.L. 444.00" MAXIMUM O.A.H. 128.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET/OUTLET WITH DISCONNECT COUPLING LOCATED AT DRIVER'S SIDE PUMP PANEL
- SINGLE POINT FILL LUBE SYSTEM
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT PER ORDER
- BATTERY CHARGE INDICATOR LOCATED AT DRIVER'S SEAT PER ORDER

REV	DATE	BY	CH	VELOCITY FR
01JAN26	KLE	CLM		
03NOV25	SAM	CLM		
14FEB25	SAM	CLM		

Pierce MANUFACTURING INC.		JOB NO.	39741
		SCALE	1:24
		DATE	
		DRAWN BY	SAM
		CHECKED BY	CMS
		SHEET NO.	05FEB25
		SHEET SIZE	D
		SHEET NO.	1 OF 2

TITLE 1500GPM, 2000G TANK, 1980G WATER, 20G FOAM
244" PUC TANKER, MUX
FOR CITY OF CHESAPEAKE
CHESAPEAKE, VIRGINIA
DWG NO. 39741AD-SH1