


- HOSEBED CAPACITIES**
- ① - 1000' OF 5.00" DIA DJP HOSE
 - ② - 500' OF 3.00" DIA DJP HOSE
 - ③ - 500' OF 3.00" DIA DJP HOSE
 - ④ - 200' OF 1.75" DIA KEY COMBAT HOSE

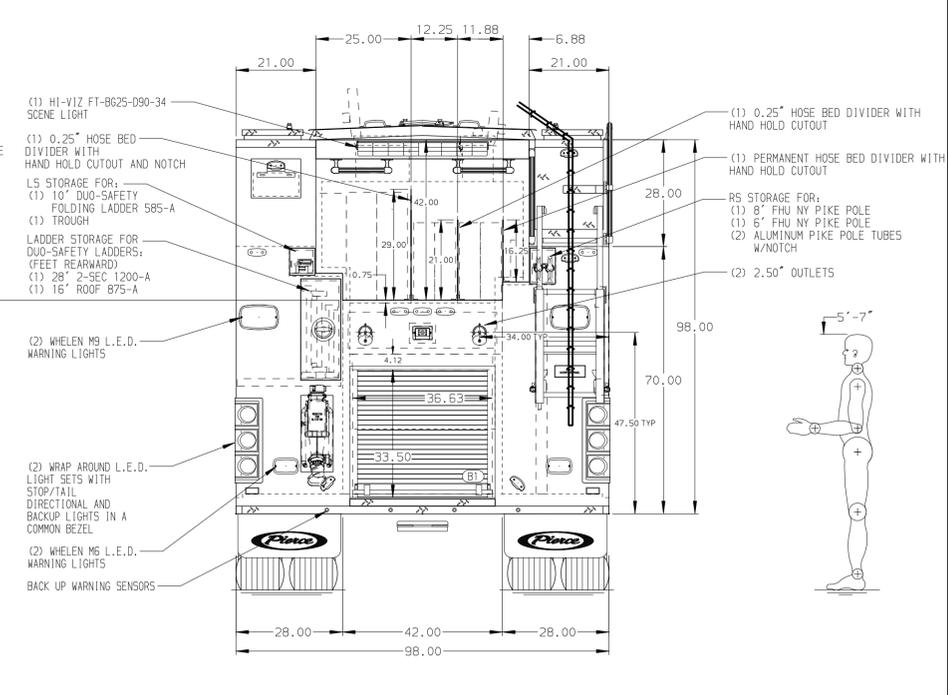

ALUMINUM BODY SIDE ROLL AND FRONTAL IMPACT PROTECTION

REFERENCE: 34489

		JOB NO.	39803
		SCALE	DATE
TITLE 2000GPM, 900G TANK, 700G WATER, 200G FOAM 214" PUC, MUX		DRAWN BY	19MAR25
		CHECKED BY	21MAR25
FOR DEER PARK VOLUNTEER FIRE DEPARTMENT DEER PARK, TEXAS		SHEET SIZE	SHEET NO.
		DWG NO.	1 OF 2

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED IN DRIVER'S SIDE STEPWELL
2. DEF TANK MOUNTED UNDER CAB ON THE DRIVER'S SIDE
3. AIR COMPRESSOR LOCATED IN LH2 HATCH COMPARTMENT PER ORDER
4. BATTERY CHARGER LOCATED IN LH2 HATCH COMPARTMENT PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER PER ORDER
6. ONE HANNAY BOOSTER REEL FOR 200' OF 1.00" HOSE LOCATED IN CARGO AREA (MODEL: SBEP34-23-24)
7. TWO HANNAY ELECTRIC CORD REELS (MODEL: E1618-17-18) WITH 200' OF 10/3 CORD LOCATED IN LH2/RH2 HATCH COMPARTMENTS AND PAYOUT TO BODY COMPARTMENT BELOW PER ORDER

REV	DATE	BY	CH	VELOCITY FR
▽	280C25	SAM	KLH	CHASSIS DATA
▽	15AUG25	SAM	PHA	MAKE
▽	05JUN25	SAM	PHA	PIERCE
▽	25MAR25	SAM	PHA	MODEL

39803AD-SH1