



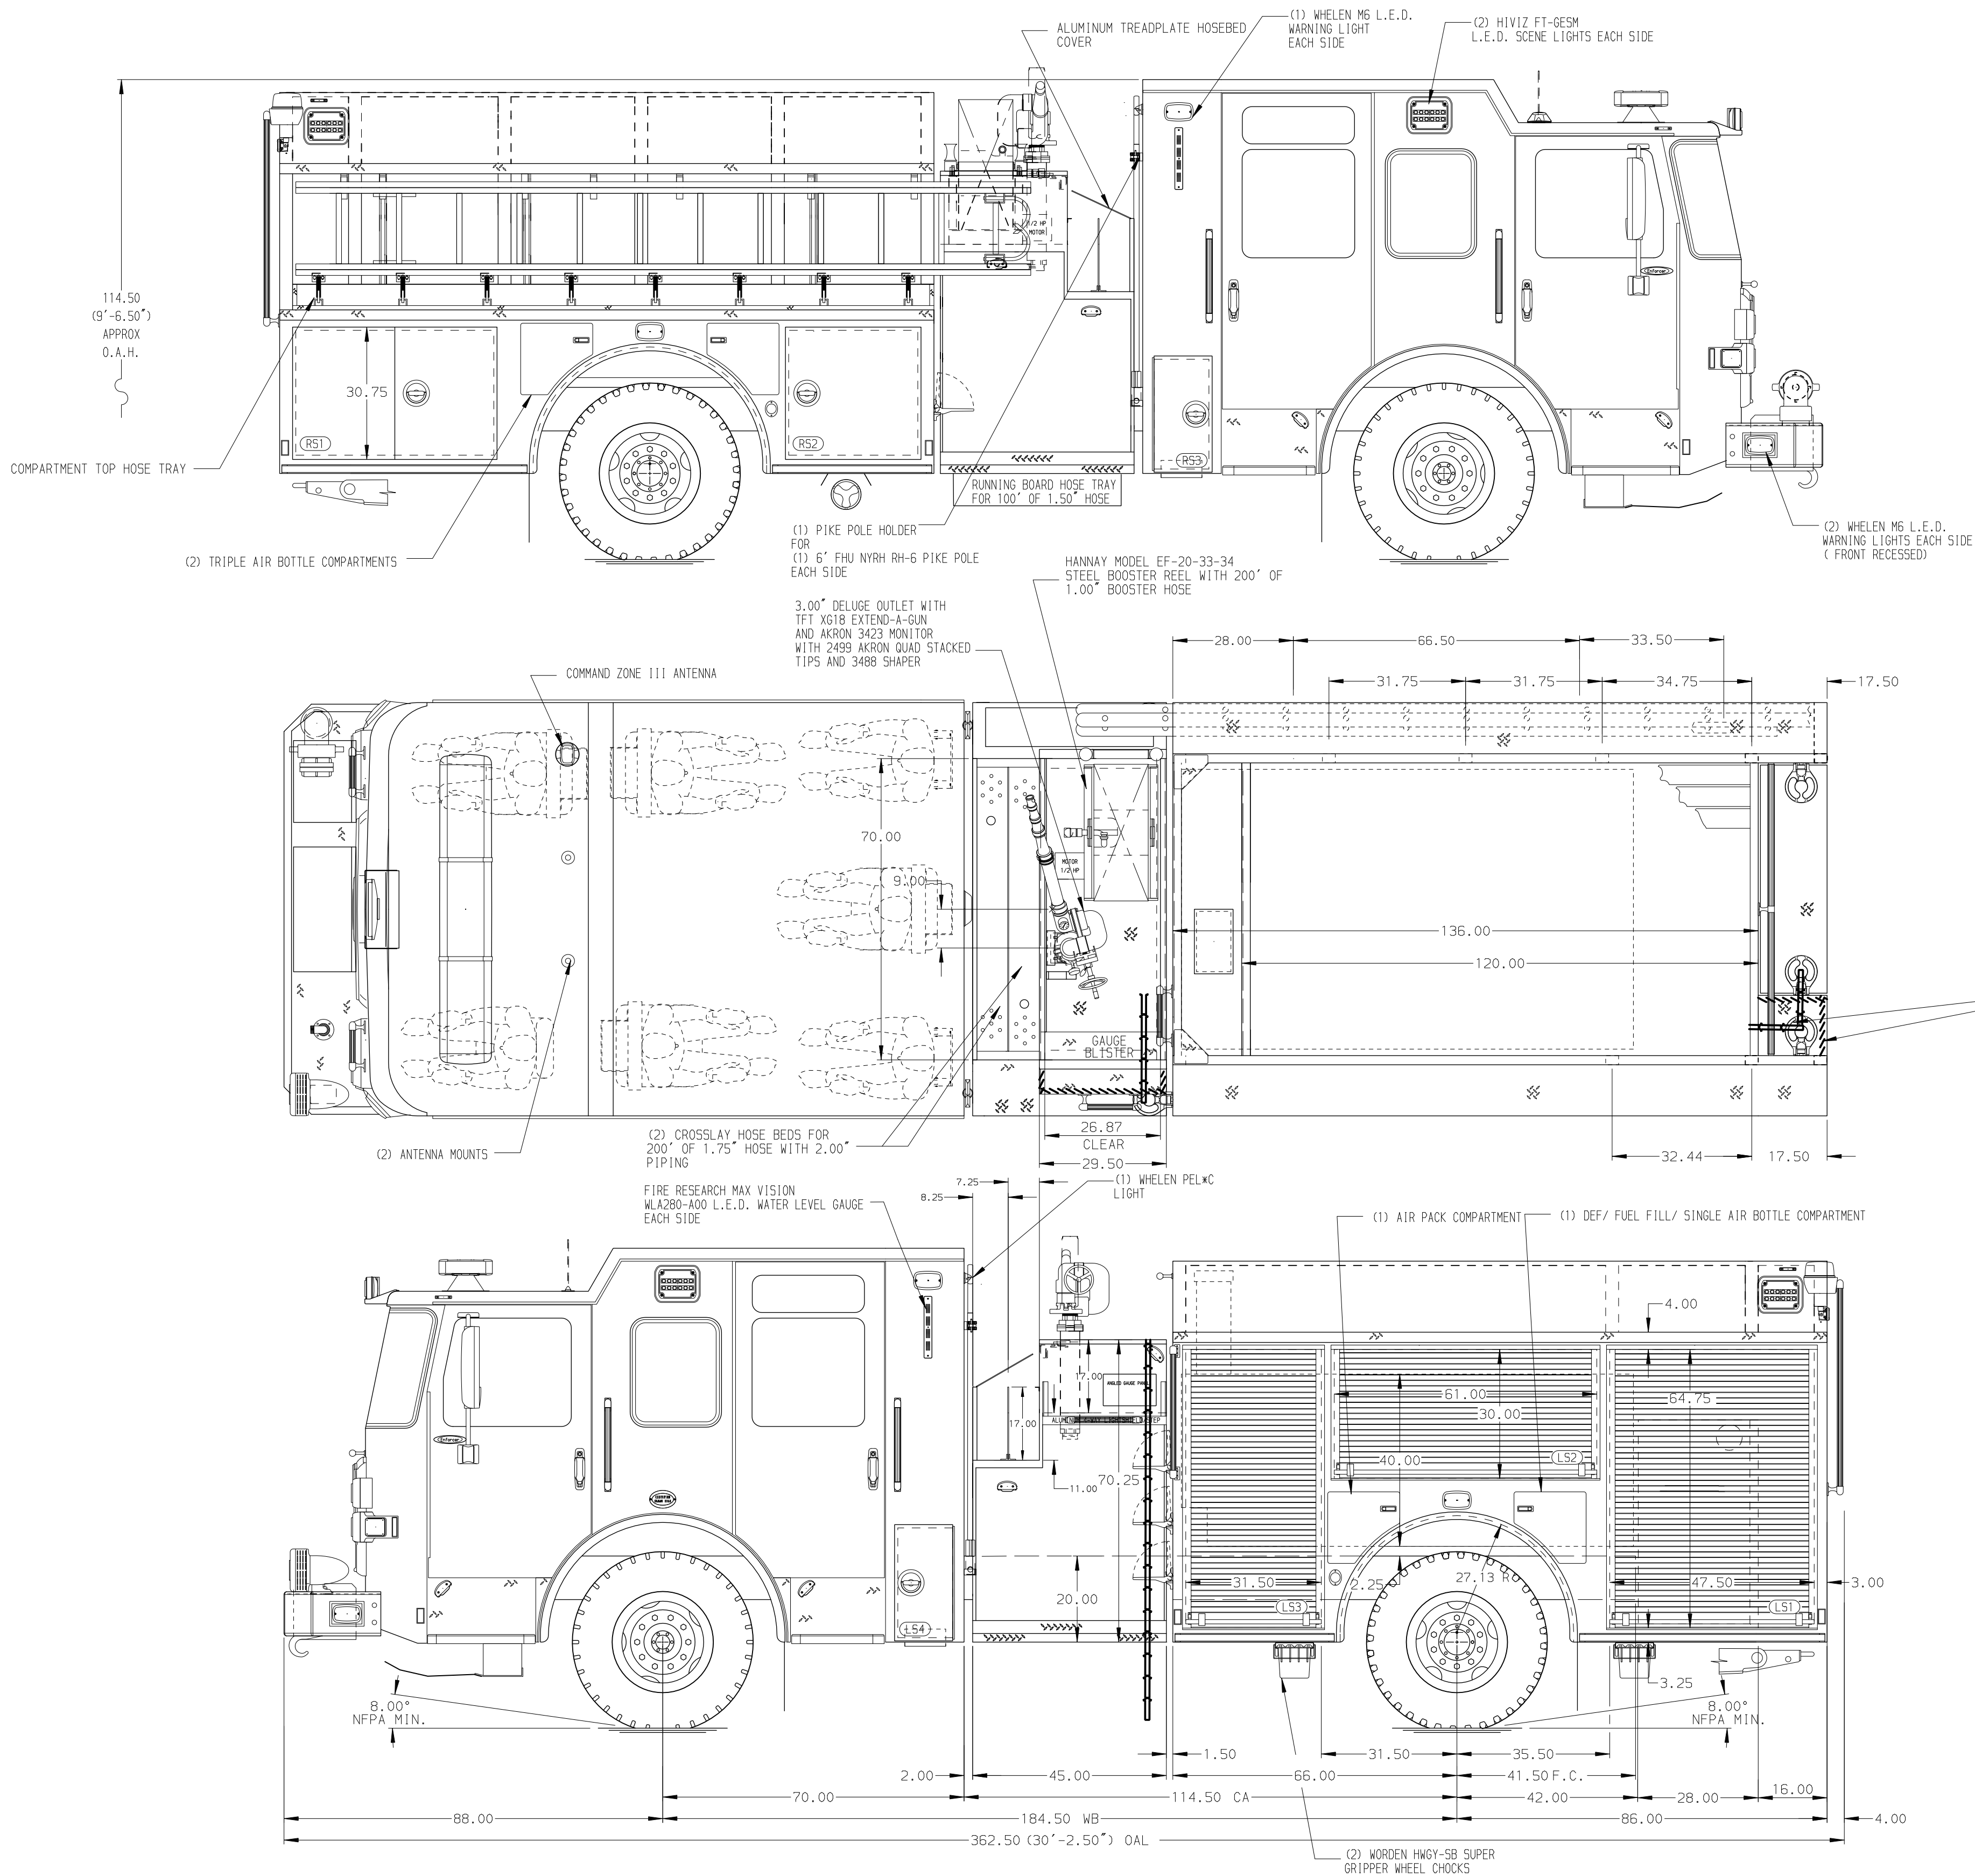

- HOSEBED CAPACITIES
- ① 500' OF 2.50" D.J. POLY HOSE
 - ② 250' OF 1.75" D.J. POLY HOSE
 - ③ 1000' OF 4.00" D.J. POLY HOSE

SURFACE DESIGNATION AND PATHWAY MARKINGS

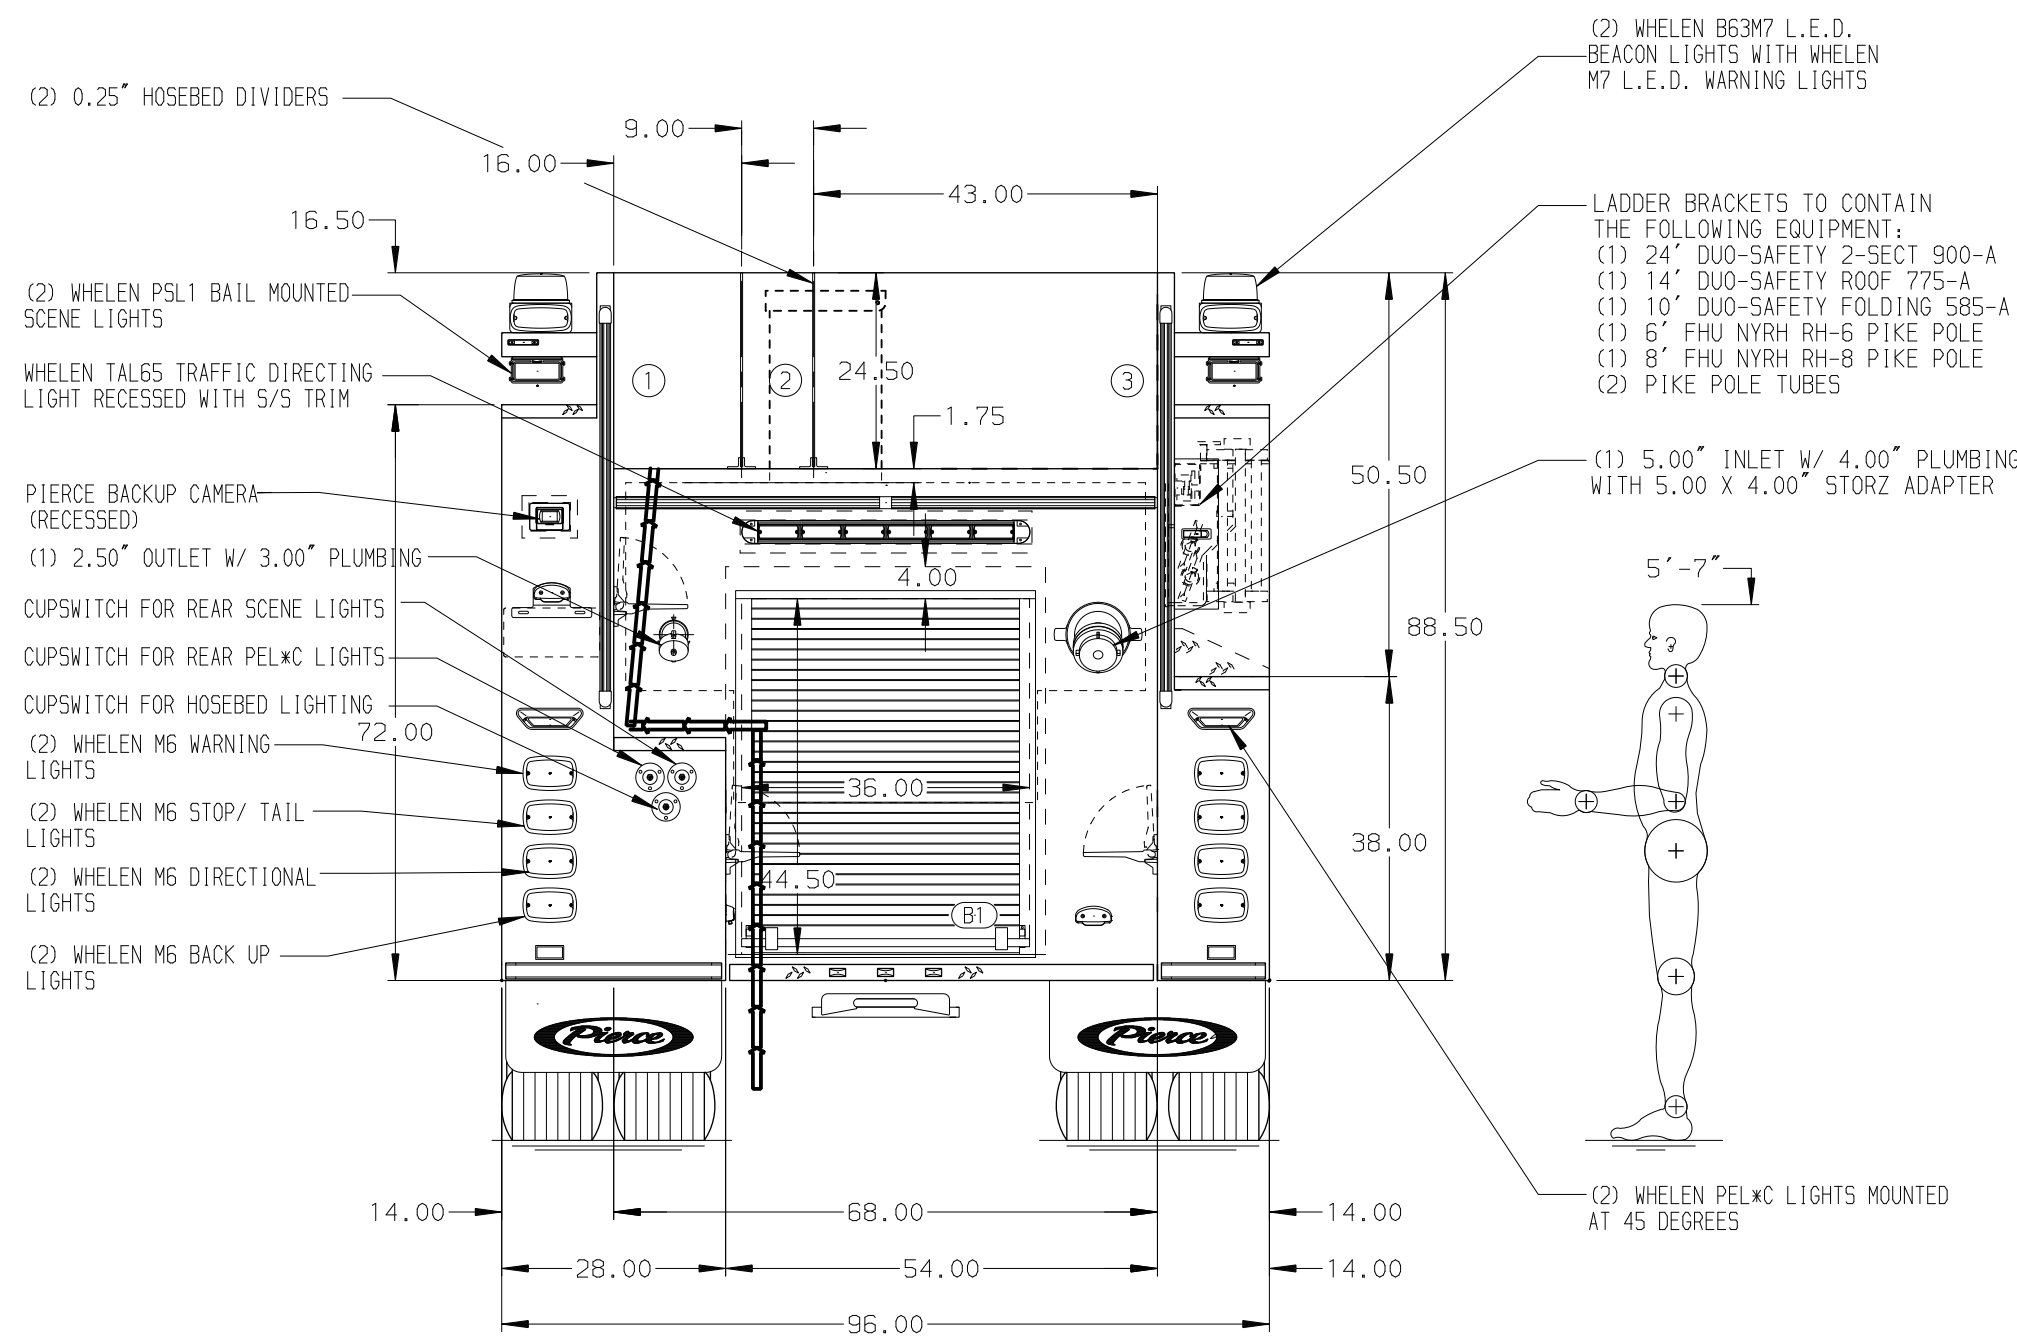

ALUMINUM BODY

MAXIMUM O.A.L. 363.00"

MAXIMUM O.A.H. 113.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. AIR INLET WITH DISCONNECT COUPLING ON DRIVER'S SIDE PUMP PANEL
- 2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- 3. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
- 4. XANTREX INVERTER LOCATED BEHIND THE OFFICER'S SEAT
- 5. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT ON DRIVER'S SIDE PUMP PANEL

REV	DATE	BY	CH	ENFORCER
23JUN25	LST	TDC		
20MAY25	LST	TDC		
03APR25	LST	SZE		

TITLE	1750 GPM, 850 GAL WATERTANK 152" BODY, MUX
FOR	BOROUGH OF TOTOWA TOTOWA, NEW JERSEY
DWG NO.	39836AD



MANUFACTURING INC.

JOB NO.	39836
SCALE	1:24
DATE	
DRAWN BY	LST
21MAR25	
CHECKED BY	SZE
24MAR25	
SHEET SIZE	D
SHEET NO.	1 OF 1