

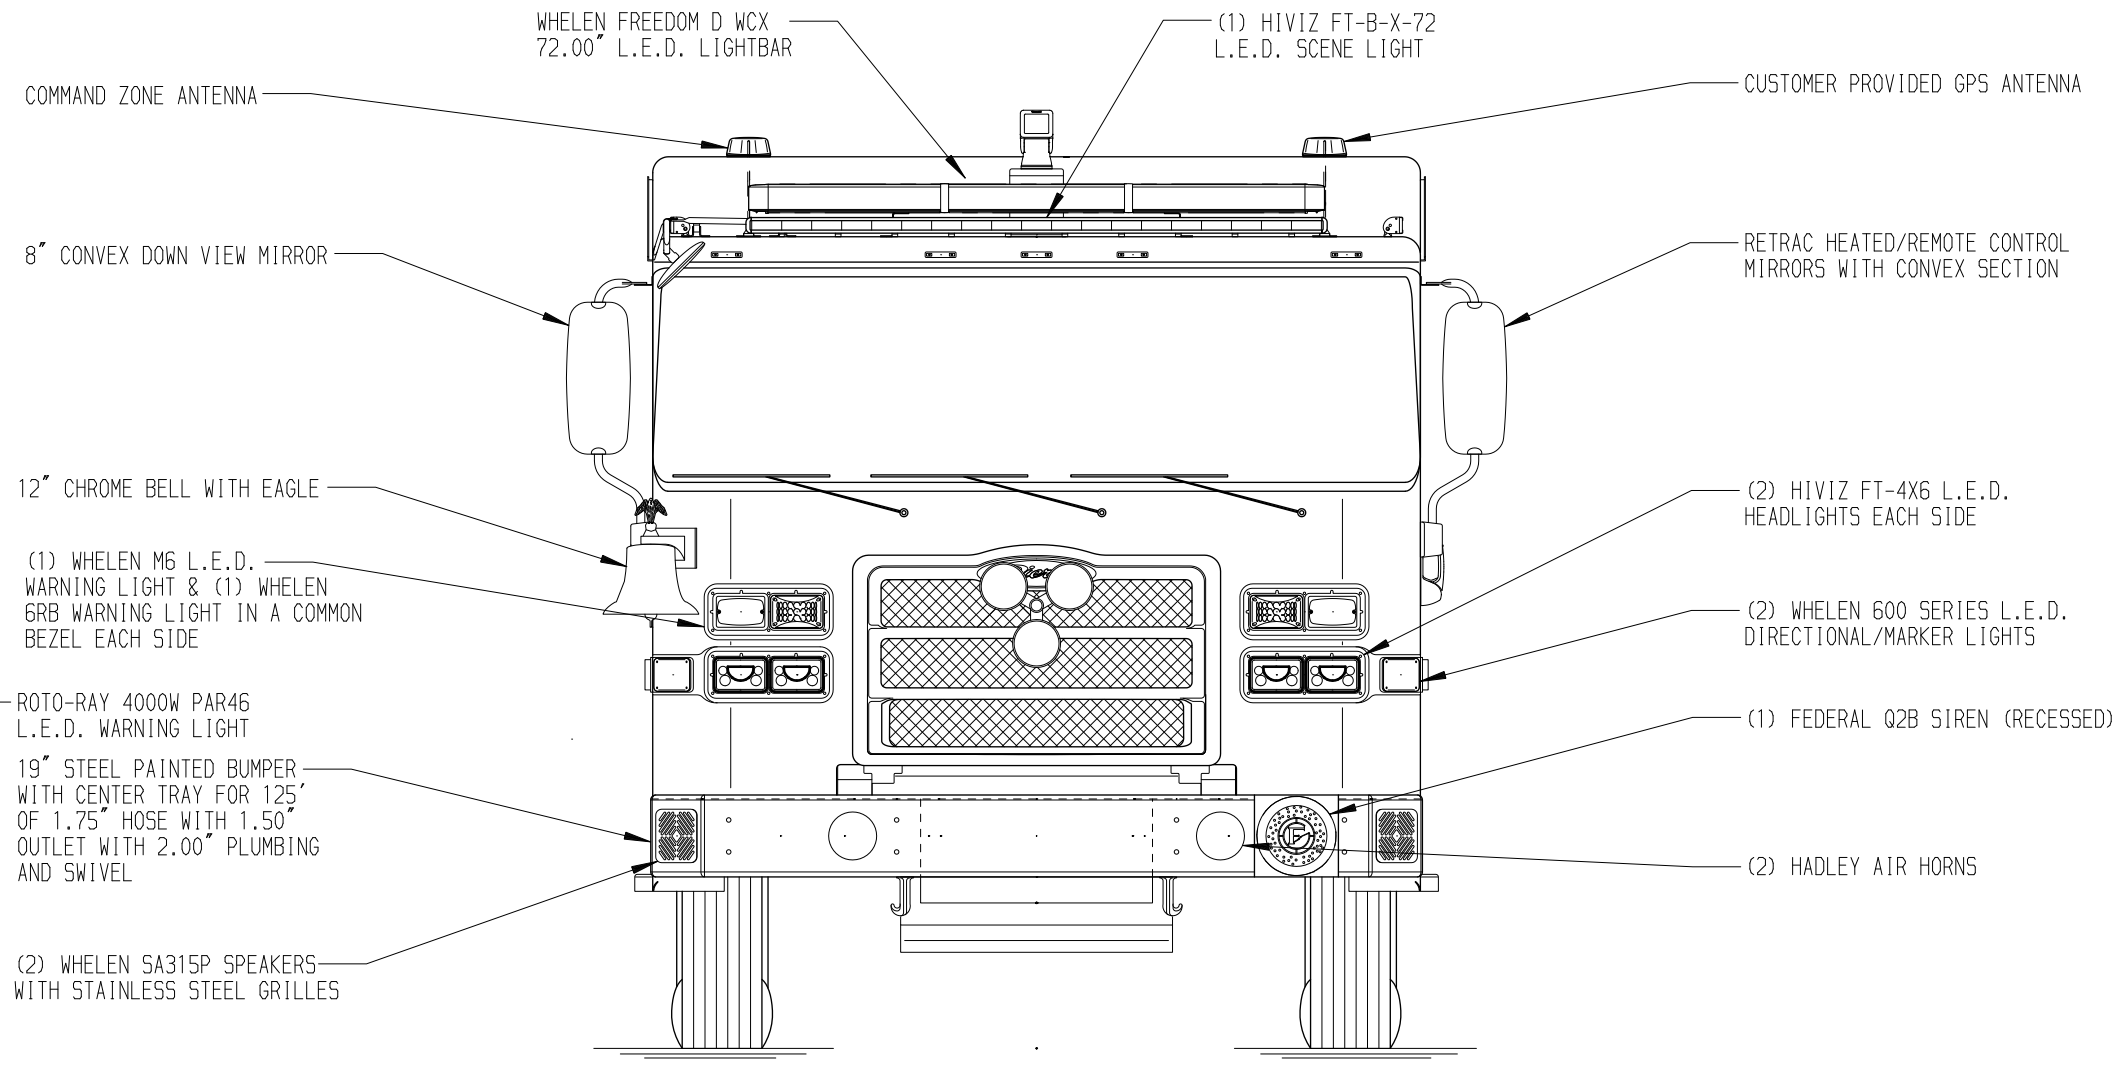


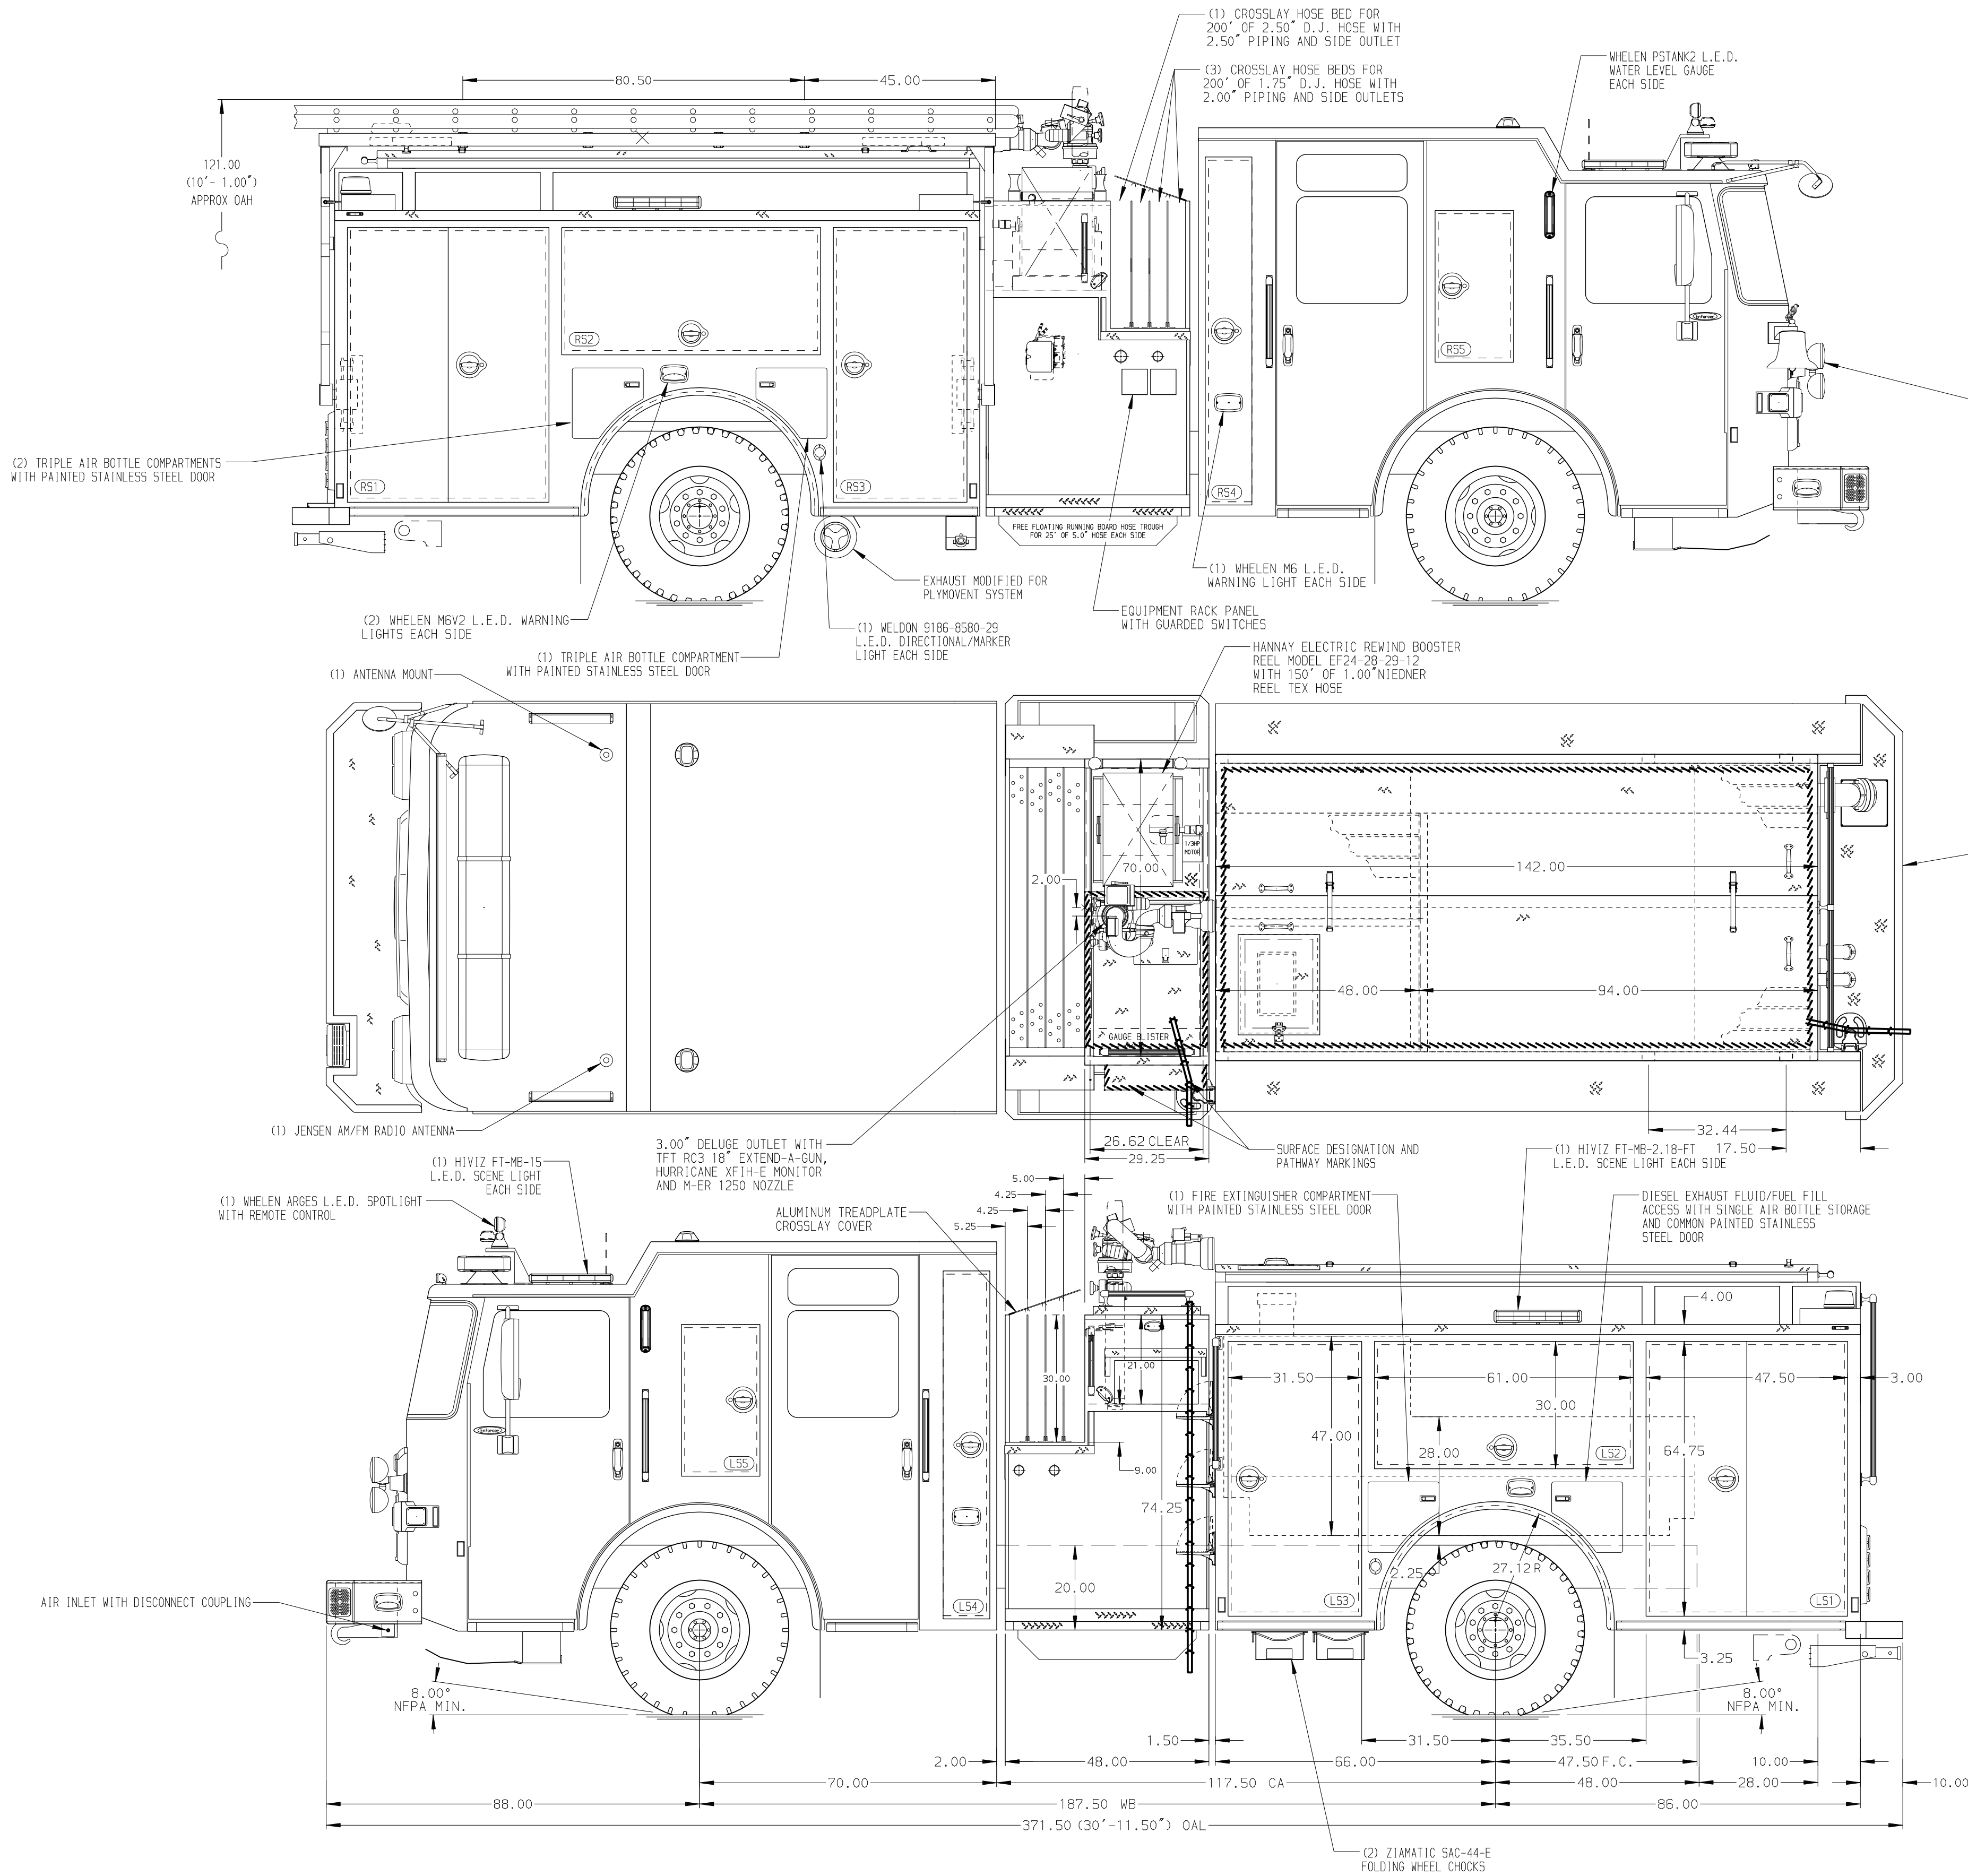

- HOSEBED CAPACITIES**
- ① 150' OF 1.75" D.J. POLY HOSE IN TRAY
 - ② 200' OF 2.50" D.J. POLY HOSE
 - ③ 200' OF 2.50" D.J. POLY HOSE
 - ④ 500' OF 3.00" D.J. POLY HOSE
 - ⑤ 800' OF 5.00" D.J. POLY HOSE

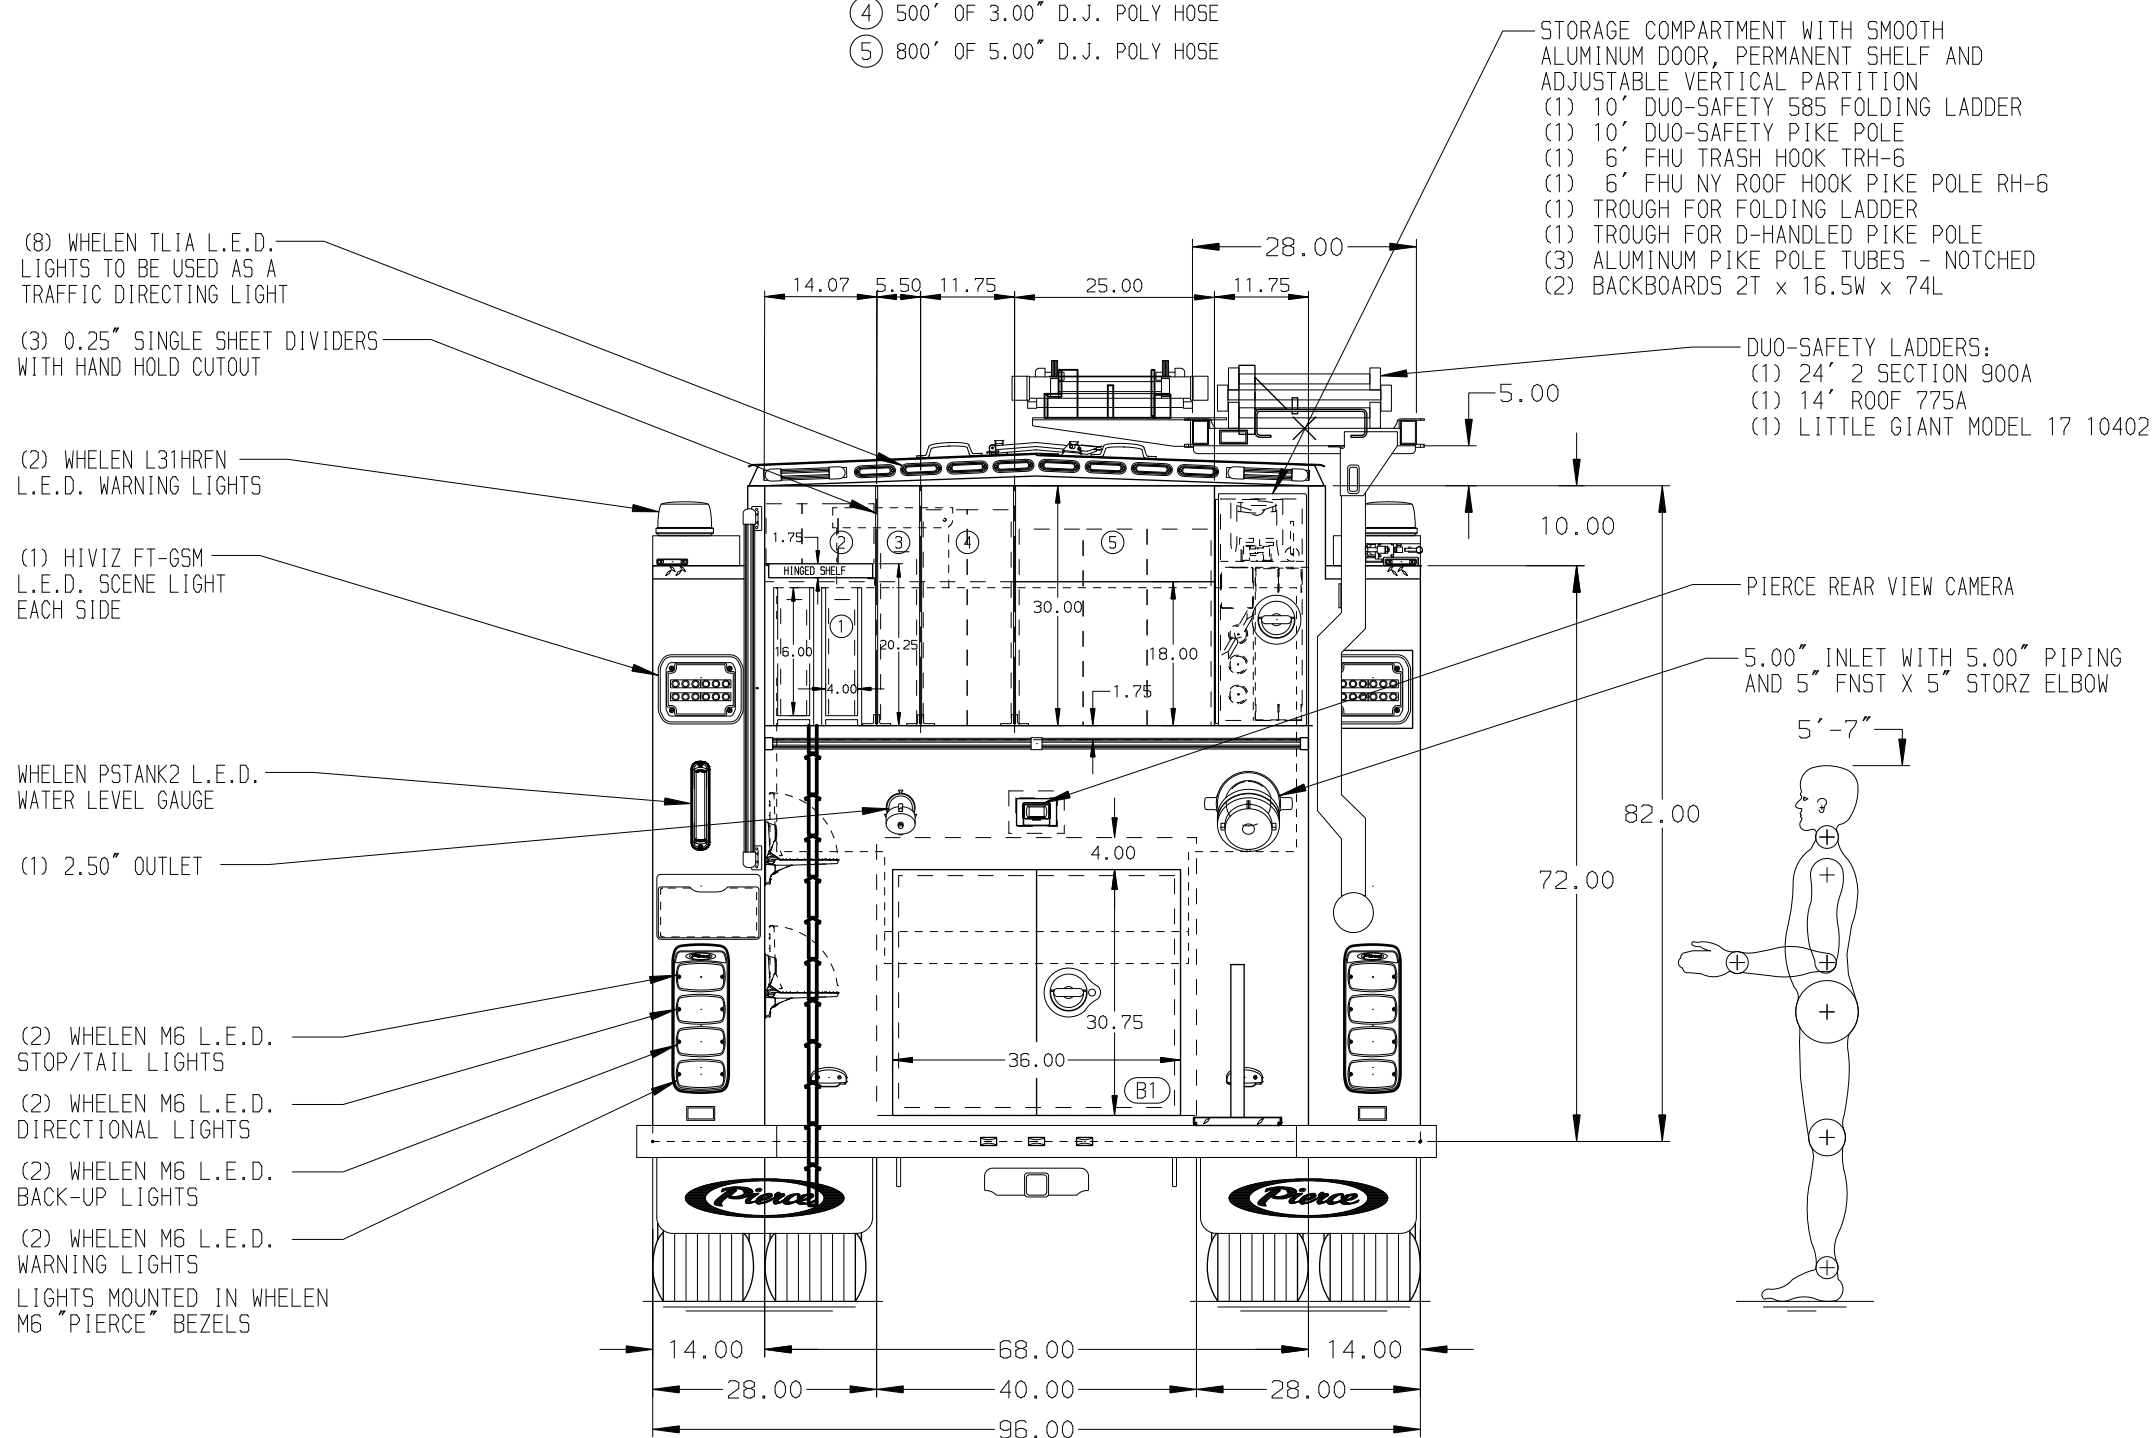

ALUMINUM BODY

REF TRUCK: 35562

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. BATTERY CHARGER LOCATED PER ORDER
- 2. 30A SHORELINE WITH KUSSMAUL SUPER AUTO EJECT IN DRIVERS STEP WELL
- 3. KUSSMAUL AIR PRESSURE DISPLAY IN DRIVER'S STEP WELL
- 4. 30A 1RT SHORELINE WITH KUSSMAUL SUPER AUTO EJECT ON LS3 FRONT WALL
- 5. SUB FEED BREAKER BOX FOR 1RT SHORELINE ON LS3 FRONT WALL

REV	DATE	BY	CH	ENFORCER
04SEP25	LST	GKH		
05JUN25	SJM	GKR		
02MAY25	SJM	GKH		
28FEB25	SJM	KLH		

 MANUFACTURING INC.		JOB NO.	39860
		SCALE	1:24
		DATE	
		DRAWN BY	SJM
		21FEB25	
		CHECKED BY	SZE
		21FEB25	
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE 1500GPM, 750G TANK, 750G WATER, OG FOAM
FOR 152" 2G PUMPER, MUX
THURSTON F.D. 8 SOUTH BAY
OLYMPIA, WASHINGTON
DWG NO. 39860AD