PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM
18,000 lb Oshkosh TAK-4 Axle

AXLE, REAR

24,000 lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

BUMPER

Allison 6th Gen, 3000 EVS P

19" Extended Steel Painted

СAВ

7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY

750 Gallon New York Style Water Tank

750 Gallons of Water

WATER CAPACITY

FOAM CELL

Foam Cell Not required

COMPT, PUMPER, REAR

Rear Compt - Dutch Door

COMPT, PUMPER, LEFT SIDE

152" Roll Up Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE 152" Roll Up Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Hale QMAX

CROSSLAYS, 1.50"

(1) 1.50" With Overhead Piping, 200' of 1.75" Hose
(1) 1.50" With Overhead Piping, 250' of 1.75" Hose

CROSSLAYS, 2.50" 2.50" Crosslay Not Required

SPEEDLAYS


Speedlays Not Required

GENERATOR

Generator Not Required

FOAM SYSTEM

Foam System Not Required

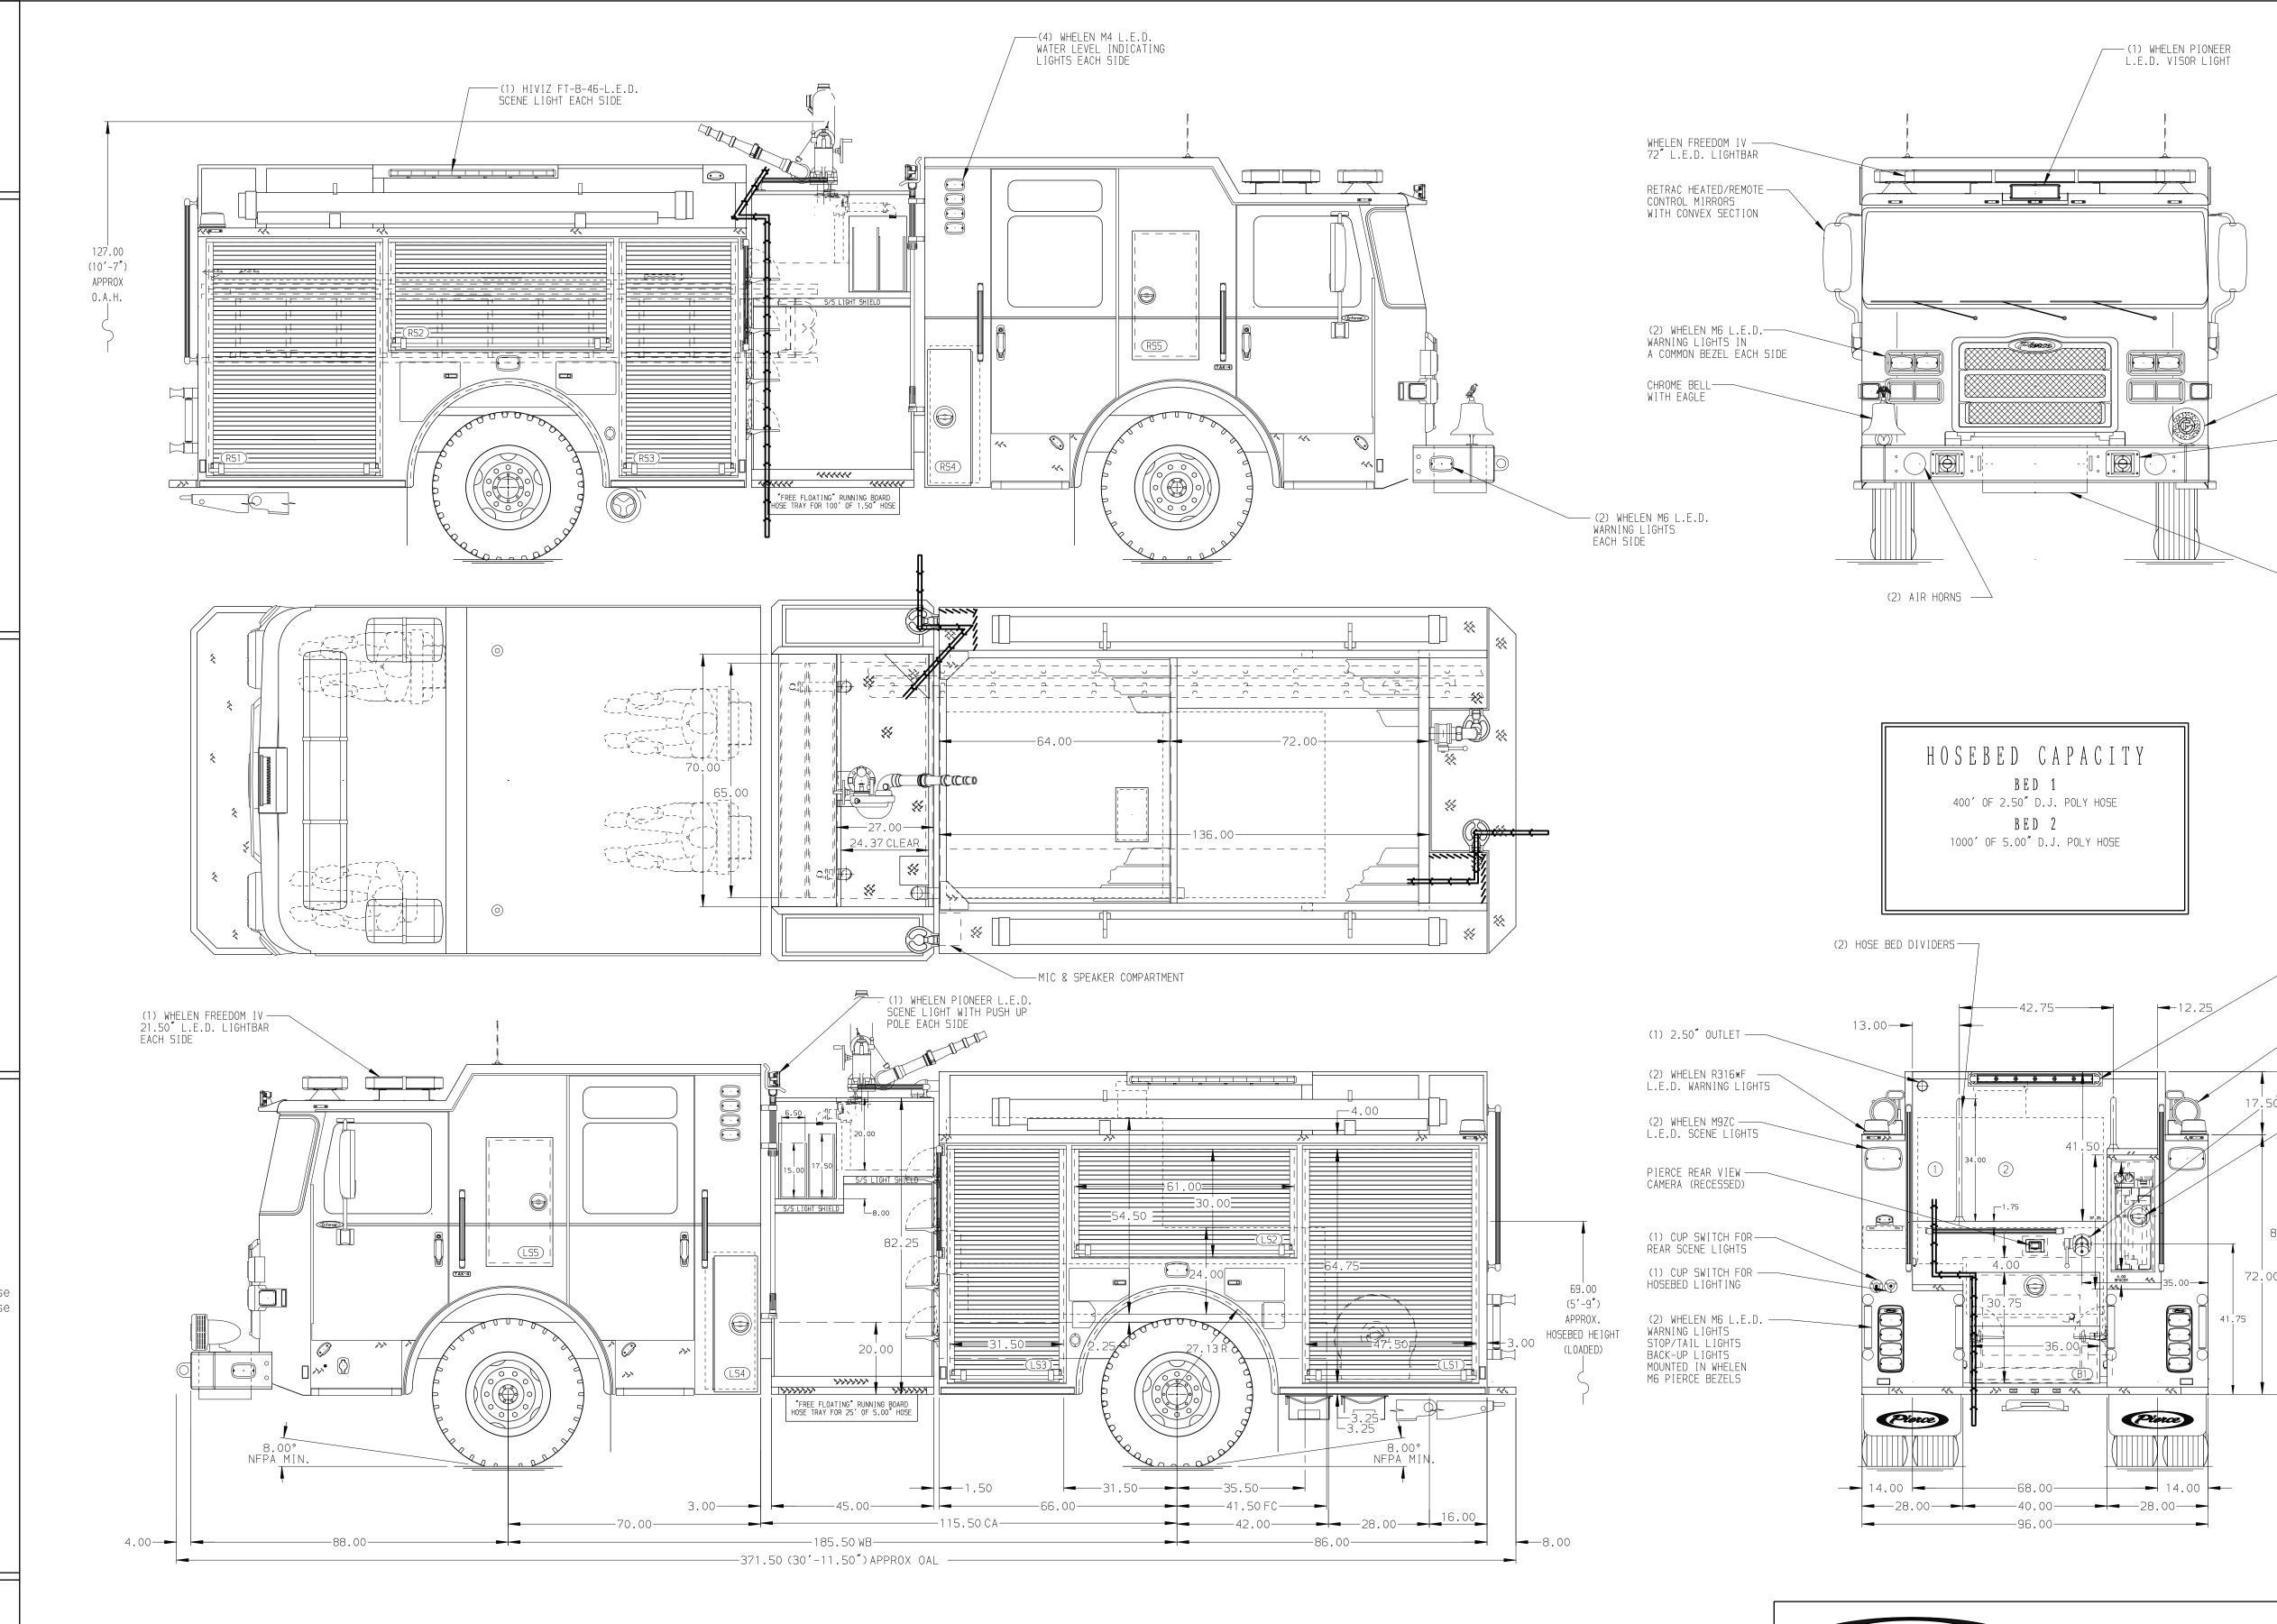

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.

MINOR DETAILS NOT SHOWN.

. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER'S SIDE STEP WELL
. AIR INLET WITH DISCONNECT COUPLING ON DRIVER SIDE STEPWELL
. BATTERY CHARGER LOCATED IN COMPARTMENT LS3
. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF THE CAB

O. HANNAY BOOSTER REEL MODEL EF34-23-24 LOCATED IN R1 WITH CAPACITY FOR 200' OF 1.00" BOOSTER HOSE

THREE FLOOR MOUNTED SLIDE-OUT TRAYS PER SHOP ORDER

FOUR 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER

SIX ADJUSTABLE SHELVES LOCATED PER SHOP ORDER

. TWO SLIDE-OUT TOOLBOARDS LOCATED PER SHOP ORDER . ALUMINUM PEGBOARD LOCATED PER SHOP ORDER 13. PARTITIONS BETWEEN COMPARTMENTS LS1/B 14. ONE 1.50 OUTLET WITH 2.00 PIPING AND

11. AIR OUTLET W/ SHUT OFF VALVE LOCATED ON DS PUMP PANEL
12. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
13. PARTITIONS BETWEEN COMPARTMENTS LS1/B1 & RS1/B1
14. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY

39900 JOB NO. MANUFACTURING INC. SCALE DATE 1:24 DRAWN BY Pierce Pumper Approval Drawing CHASSIS 22JAN24 JJB DATA MAKE CHECKED BY C 06JUN24 LST JKR Caddo Fire District No 1 22JAN24 MMF PIERCE ₿/|10MAY24| LST | JKR SHEET NO. MODEL SHEET SIZE A/ | 14MAR24 | LST | JKR DWG 39900AD REV DATE BY CH

-(1) FEDERAL Q2B SIREN

-(2) WHELEN SP123BMC SPEAKERS

CENTER HOSE TRAY FOR 100' OF 1.75" HOSE

(1) 6.00" X 10' HARD SUCTION HOSE EACH SIDE

—— (1) 2.50" TANK FILL

_DUO-SAFETY LADDER STORAGE

(1) 14 ROUF (75A (1) 10' FOLDING 585A (2) ALUMINUM PIKE POLE TUBES (1) 8' DUO-SAFETY PIKE POLE

(1) 6'FHU NYRH RH-6 PIKE POLE

(1) 24' 2-SECTION 900A

(1) 14' ROOF 775A

View File Created 07-JUN-2024 06:51:29