


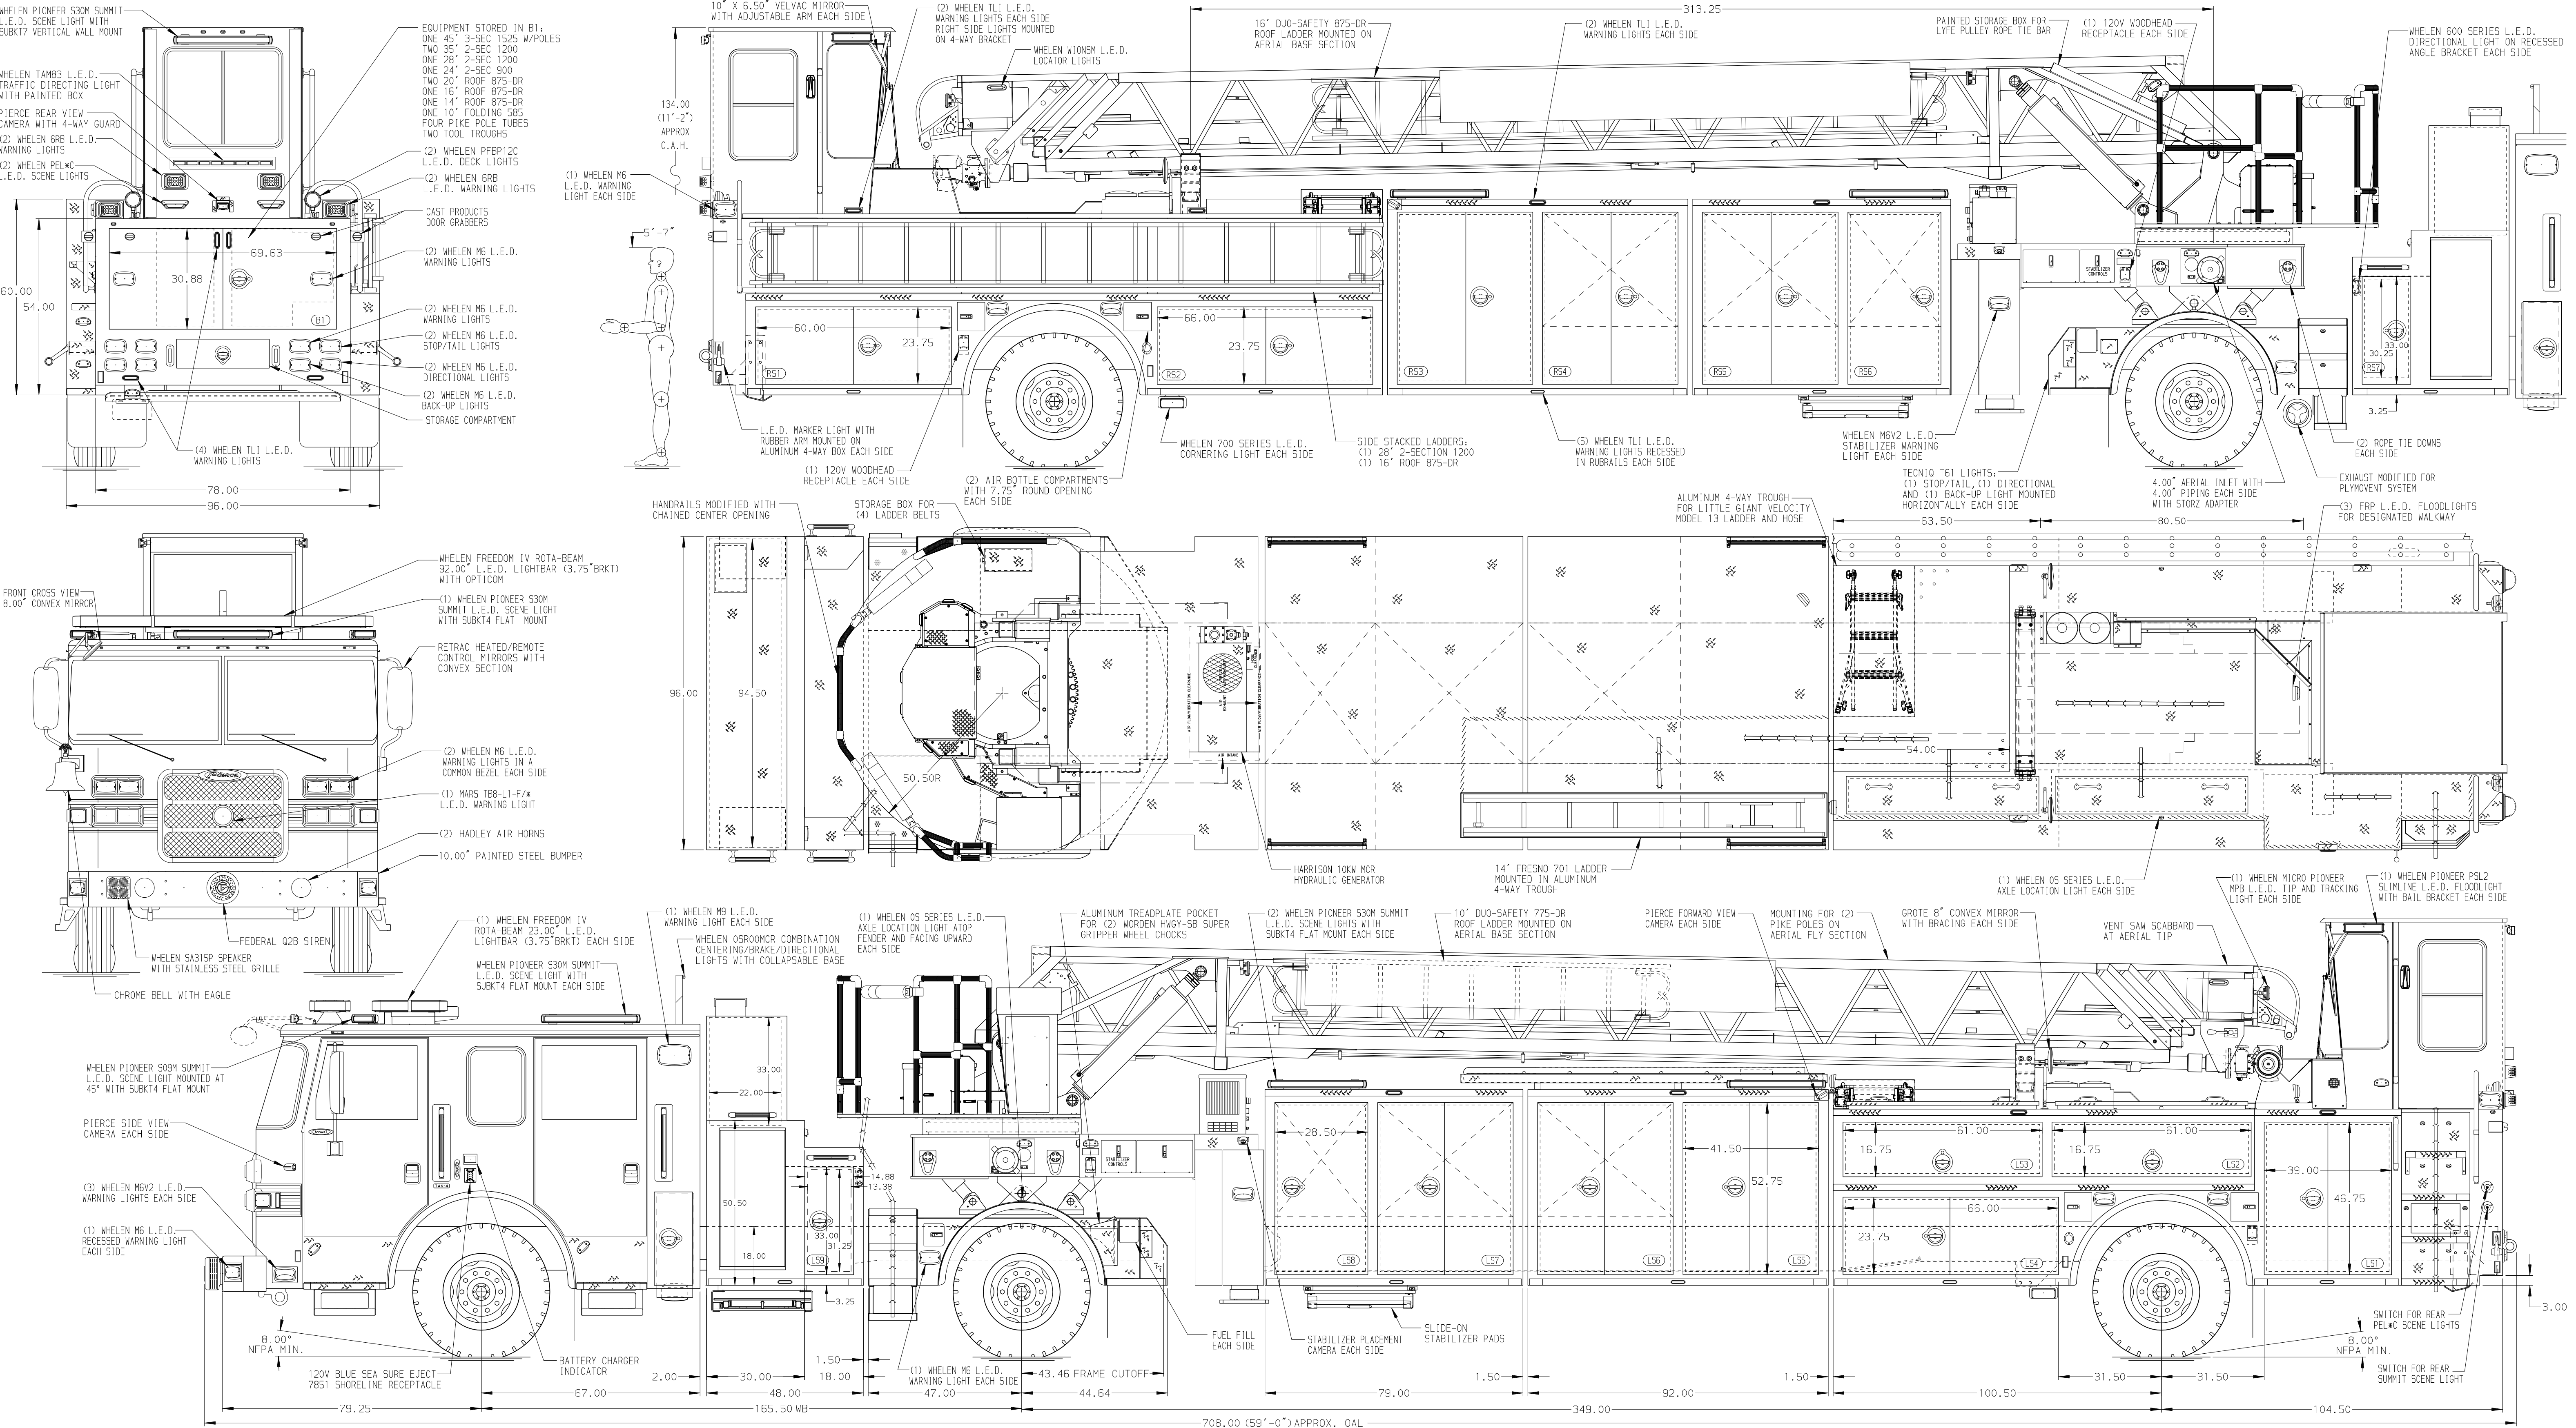

ALUMINUM BODY MAX O.A.H. 134.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. AIR INLET WITH DISCONNECT LOCATED ON DRIVER SIDE PUMP PANEL
2. AIR OUTLET WITH SHUT-OFF VALVE LOCATED ON DRIVER SIDE PUMP PANEL
3. ALUMINUM TREADPLATE ON CAB ROOF
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. 120V POWER TO AERIAL TIP
6. L.E.D. LIGHTING ON AERIAL LADDER SECTIONS
7. TRIDENT FOLDING STEPS ON AERIAL DEVICE
8. STABILIZER PLACEMENT LASERS LOCATED PER ORDER
9. LIFTING EYE ROPE RESCUE ATTACHMENT AT AERIAL TIP
10. FIRE RESEARCH 3-WAY INTERCOM SYSTEM BETWEEN AERIAL TIP, PUMP PANEL AND TURNTABLE

- 11. LYFE PULLEY RESCUE SYSTEM AT AERIAL TIP
12. BOOM SUPPORT BASED 3.50"
13. SHORTENED AERIAL EGRESS

Table with 5 columns: REV, DATE, BY, CH, ARROW XT. Rows include dates like 09APR26, 03MAR26, 26JAN26, 01DEC25, 31OCT25.

Table with 4 columns: TITLE, FOR, DWG NO., and a large alphanumeric code 39948AD-SH1. Includes company logo Pierce MANUFACTURING INC. and job details.