
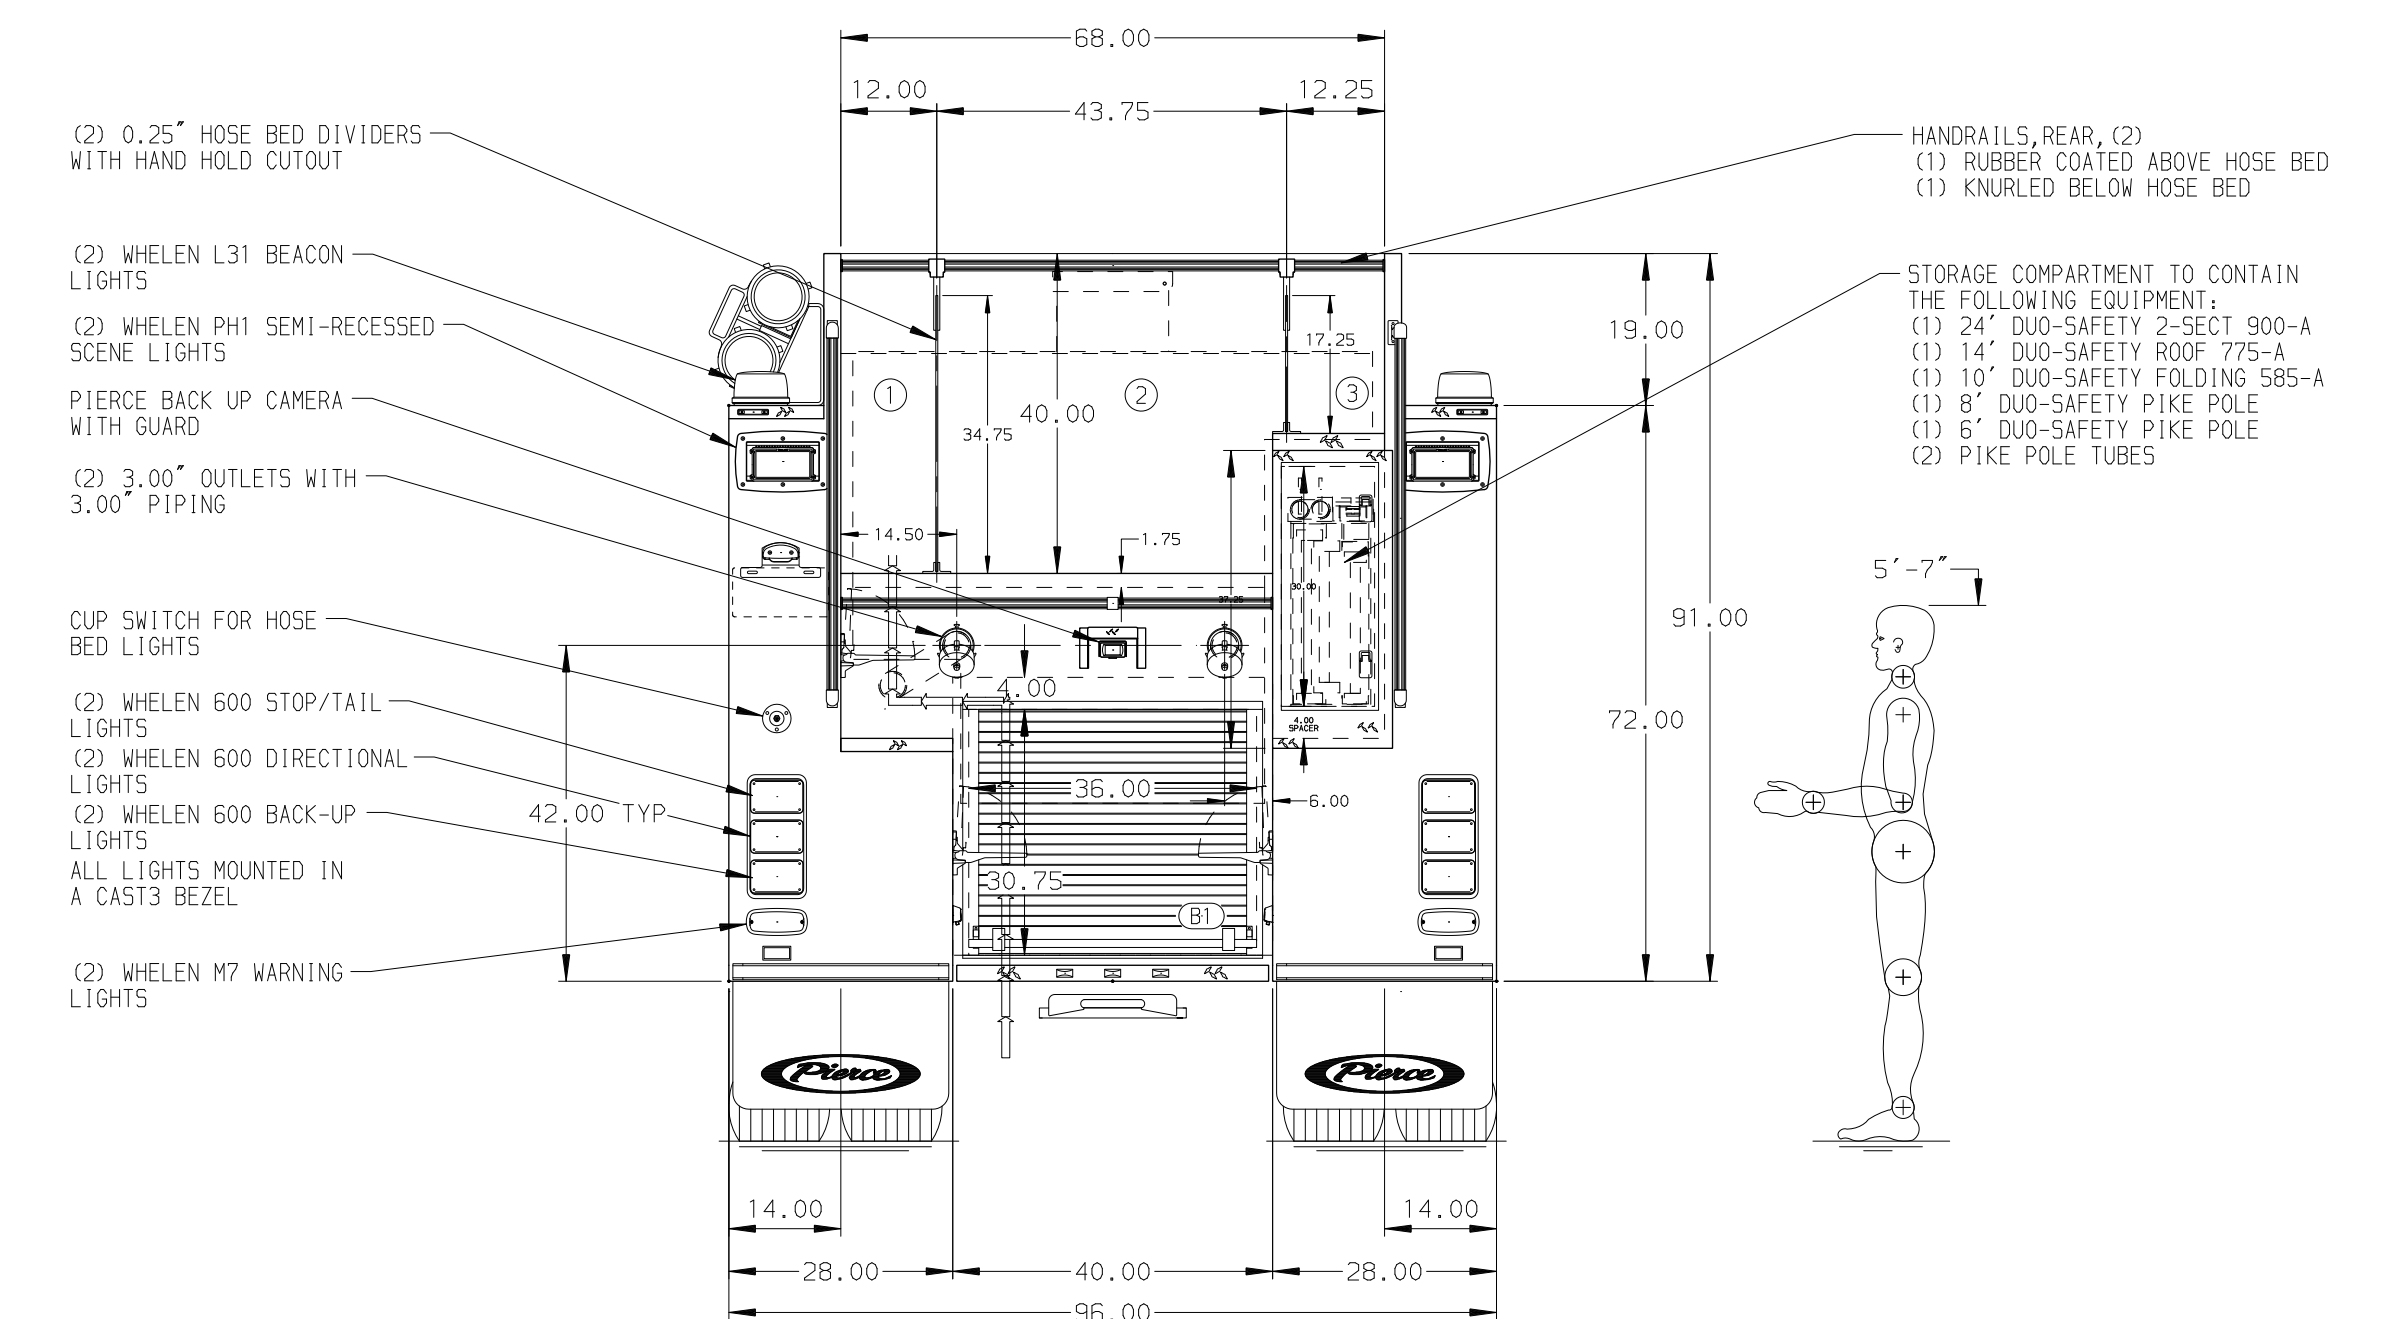
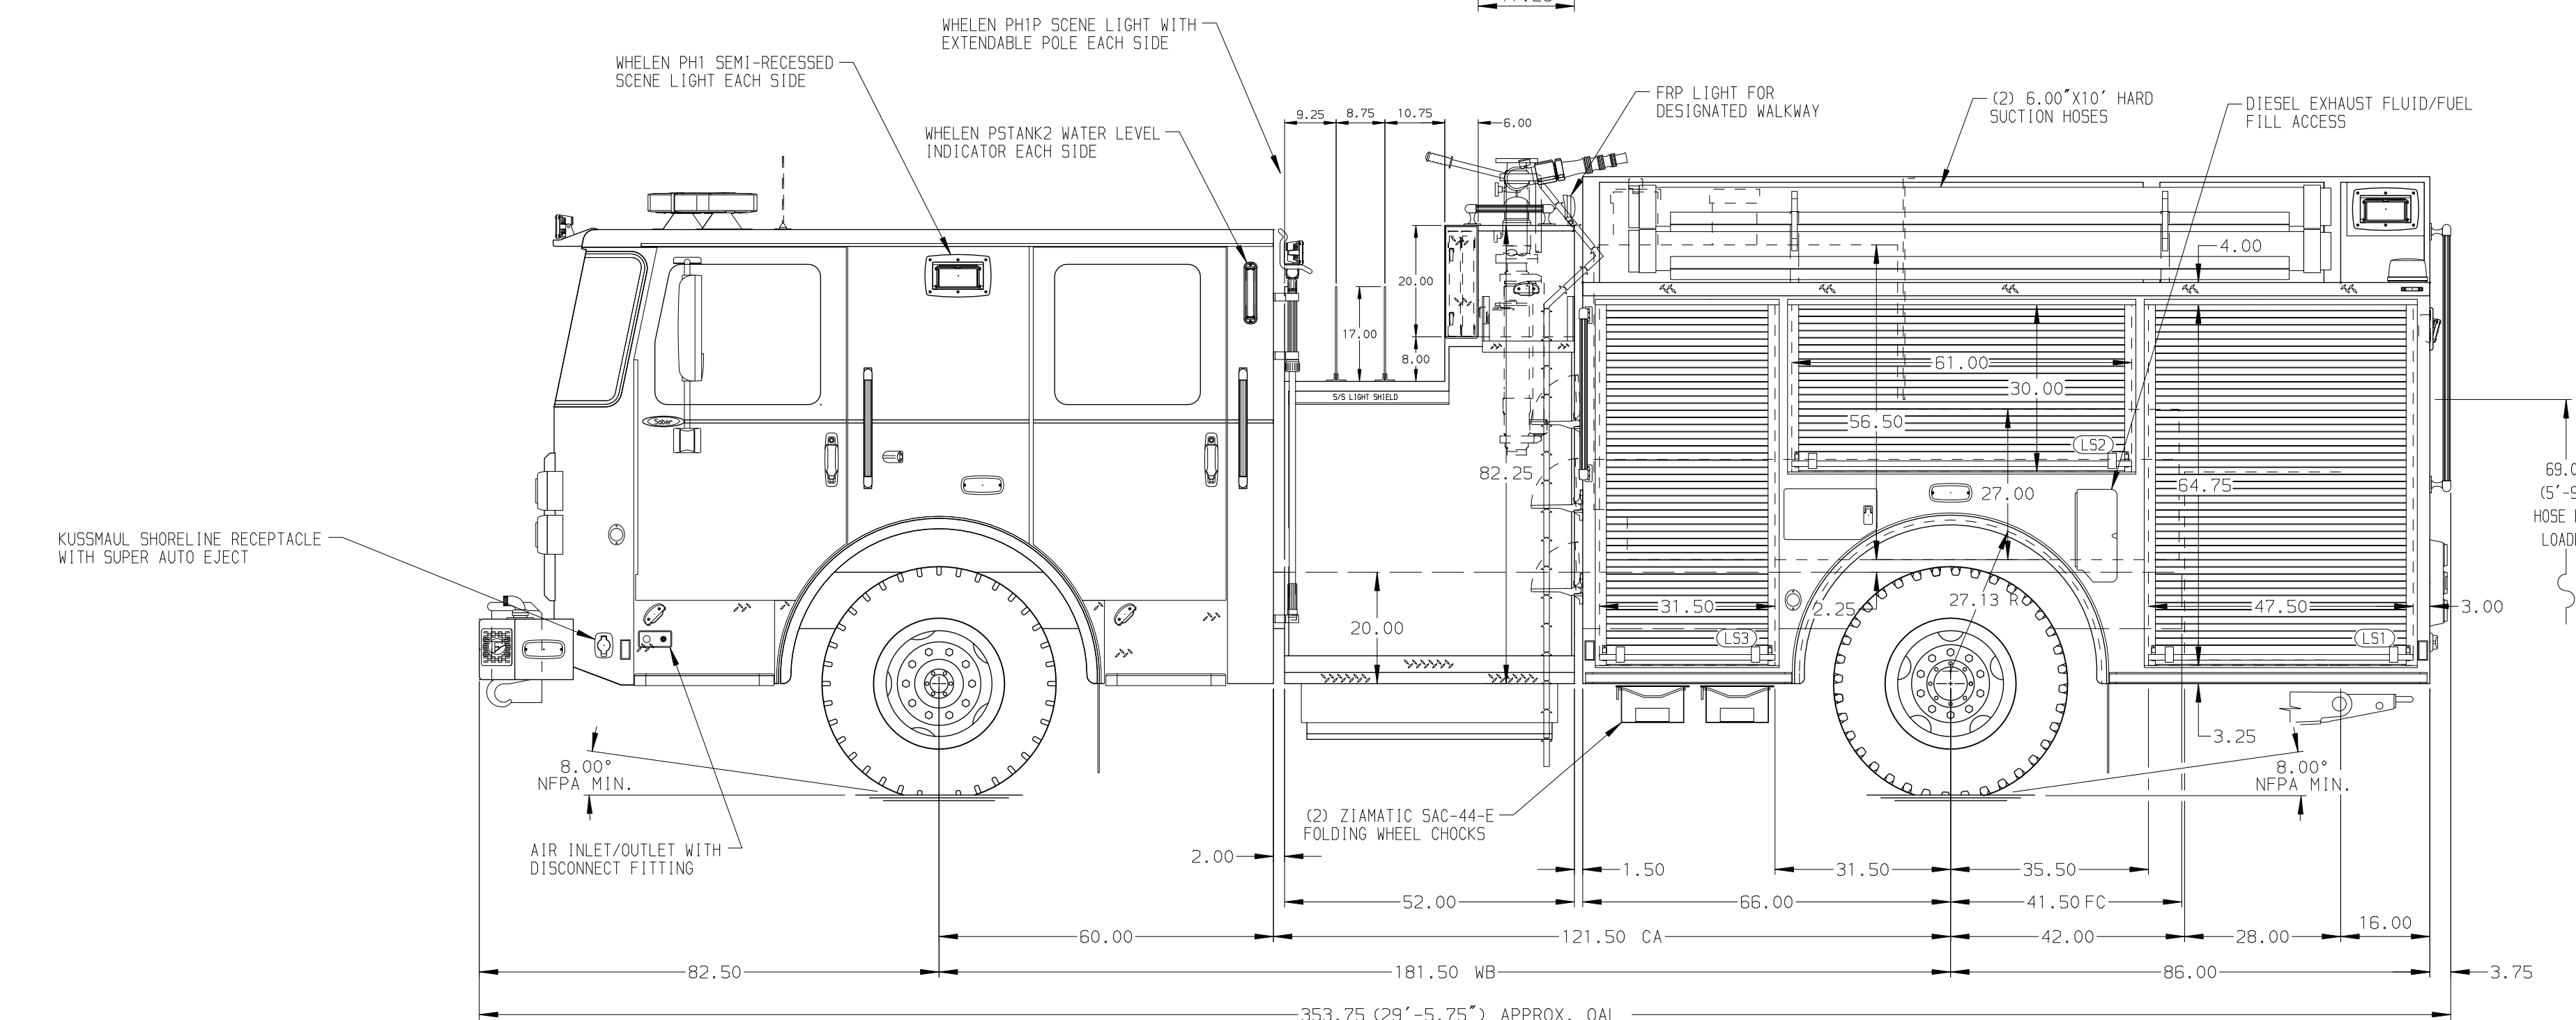
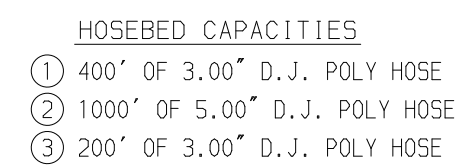
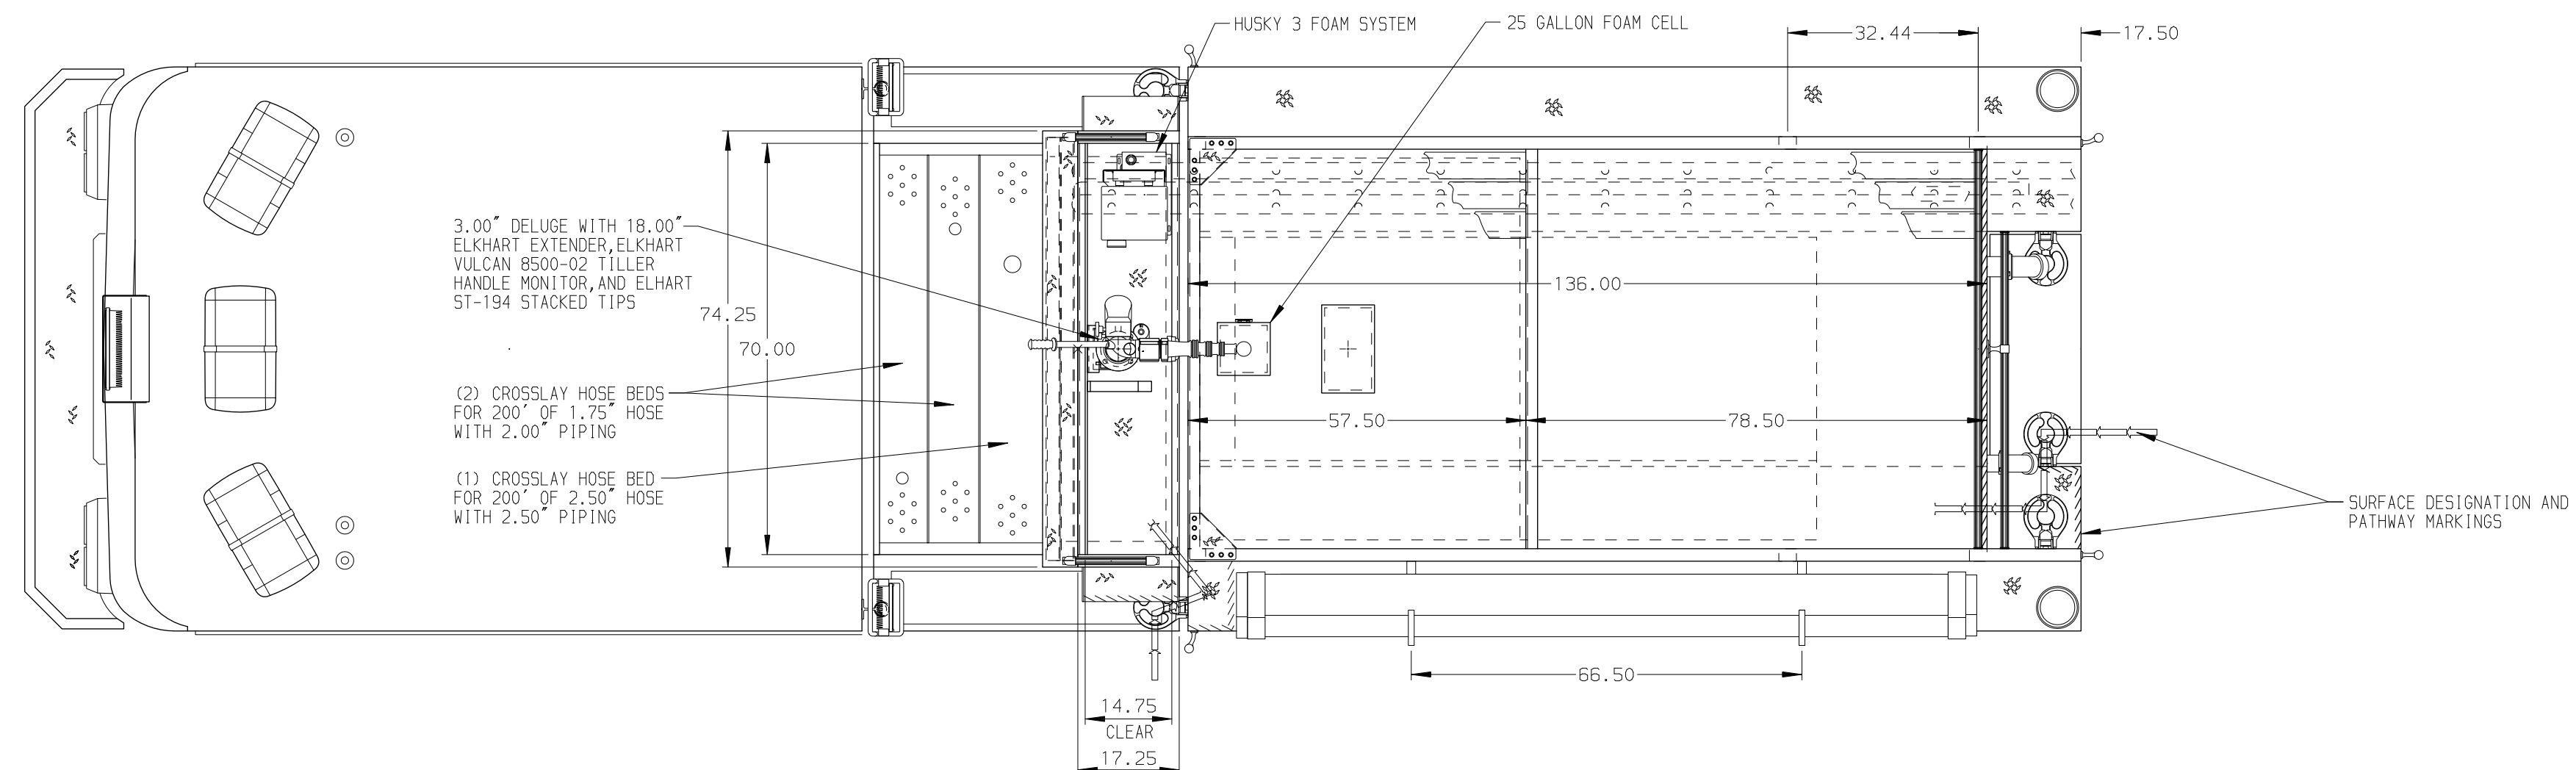
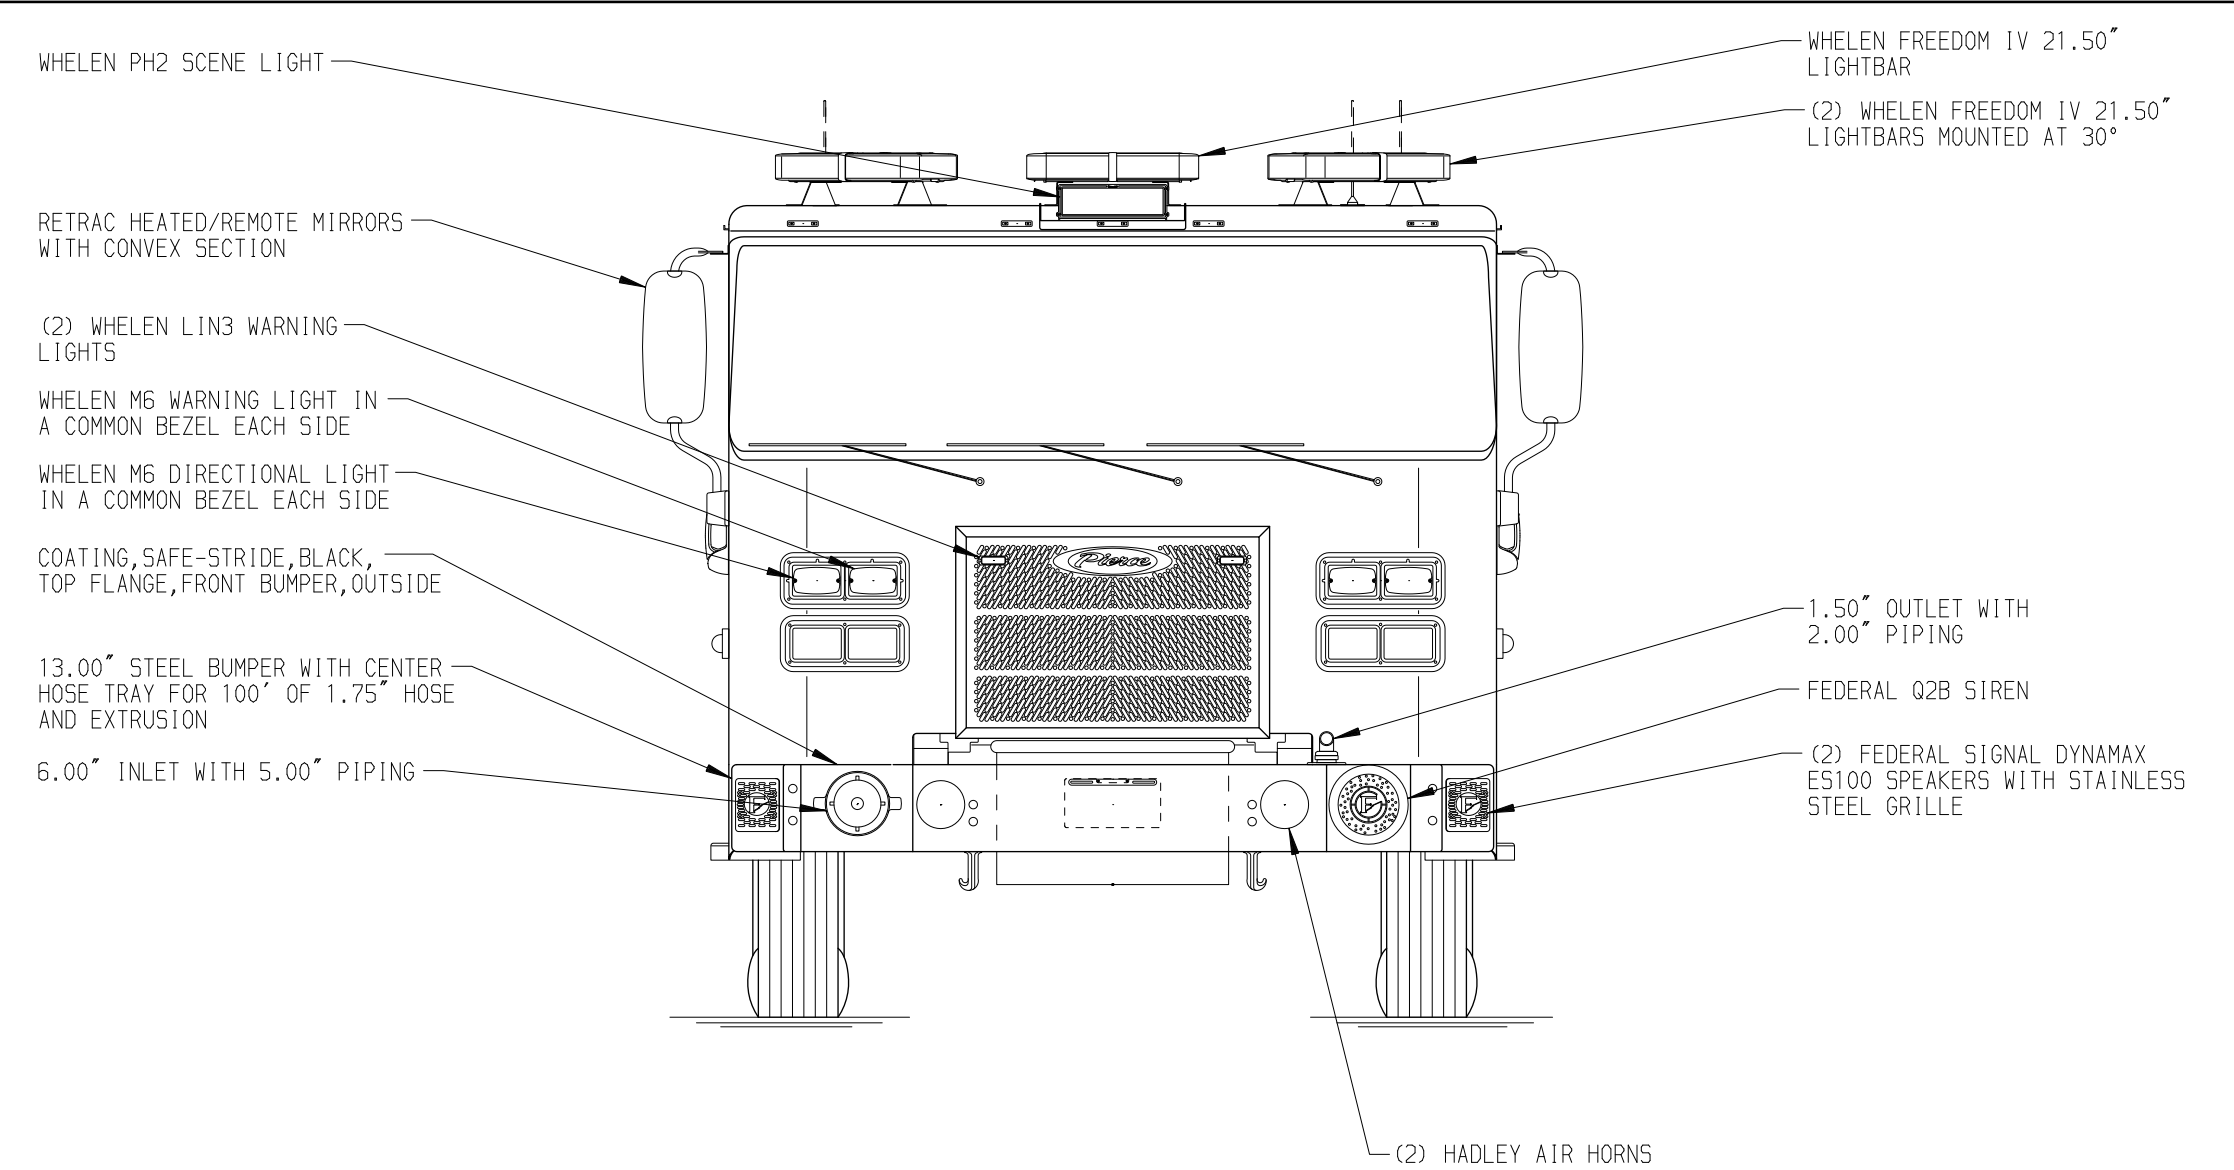


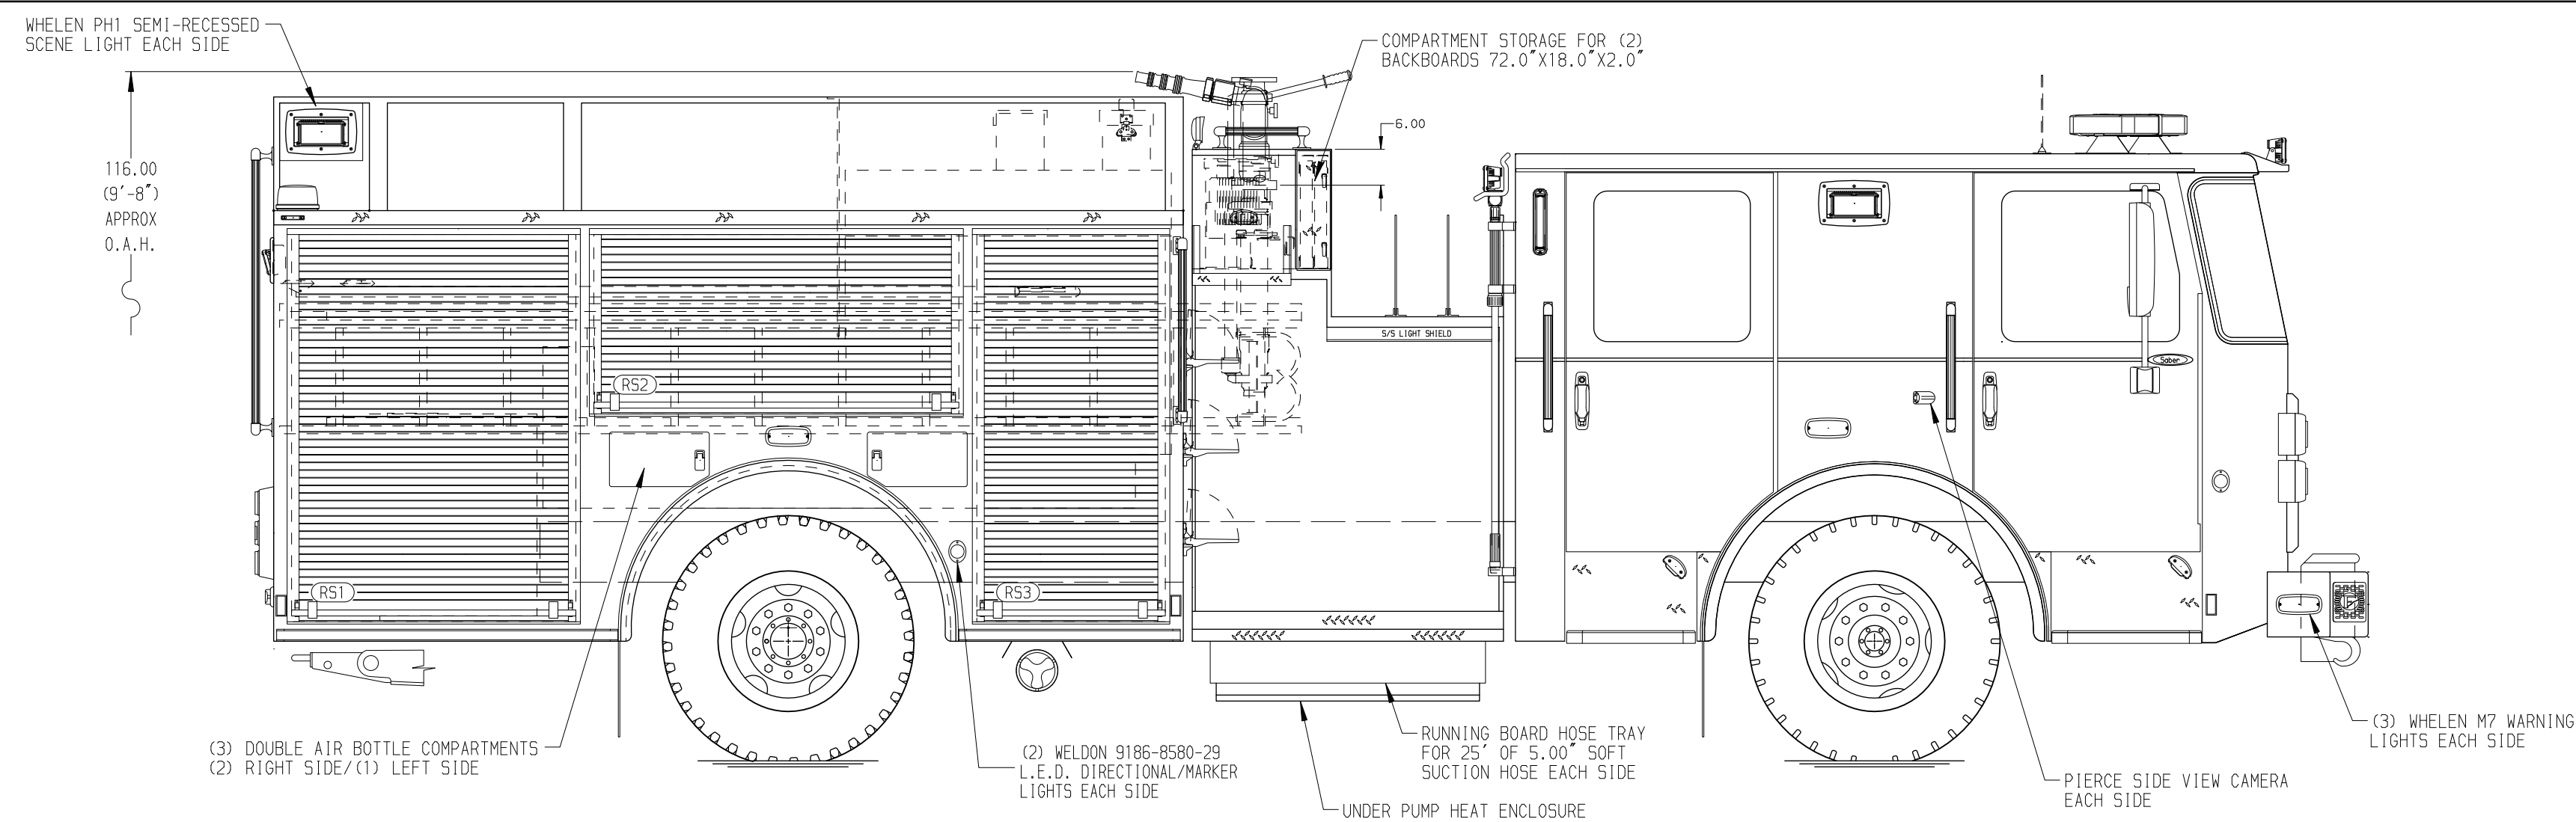

(ALUMINUM BODY) (MAXIMUM O.A.H. 116.00") (MAXIMUM O.A.L. 354.00")

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED PER ORDER
3. BATTERY CHARGER INDICATOR LOCATED PER ORDER
4. SEVEN FULL WIDTH/DEPTH ADJUSTABLE SHELVES WITH SIDES LOCATED PER ORDER
5. FIVE FLOOR MOUNTED SLIDE-OUT TRAYS WITH SIDES LOCATED PER ORDER
6. ONE 120V DUPLEX RECEPTACLE LOCATED IN CAB PER ORDER

				CHASSIS DATA	TITLE	1500-D-775P,750 GAL WATER W/25 GAL FOAM CELL 152" PUMPER BODY,52" SIDE CONTROL,DELUGE	DRAWN BY BTH	170CT23
	22MAR24	RWR	NAS	MAKE	FOR	UNITED STATES ARMY	CHECKED BY SJS	180CT23
	19JAN24	RWR	NAS	PIERCE		FORT LEAVENWORTH,KANSAS		
	27OCT23	BTH	CDU	MODEL				
REV	DATE	BY	CH	SARFR FR	DWG NO	40058AD	SHEET SIZE D	SHEET NO. 1 OF 1