

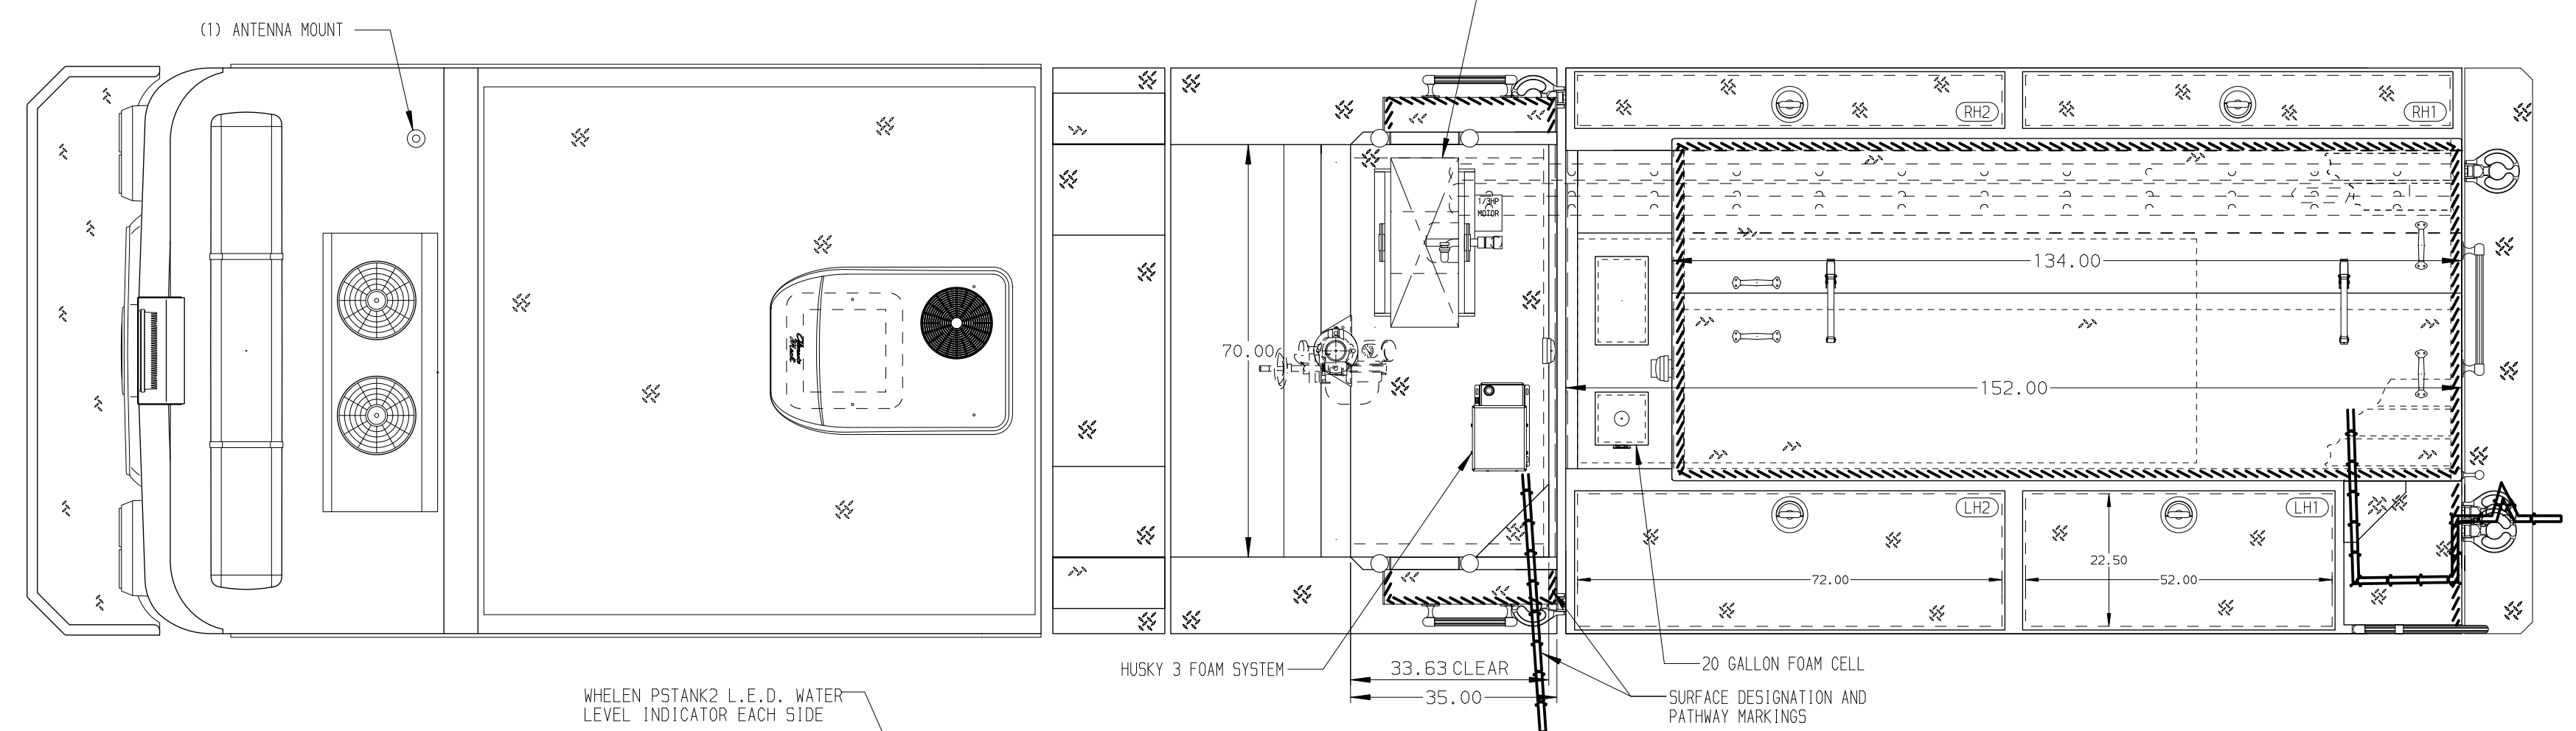
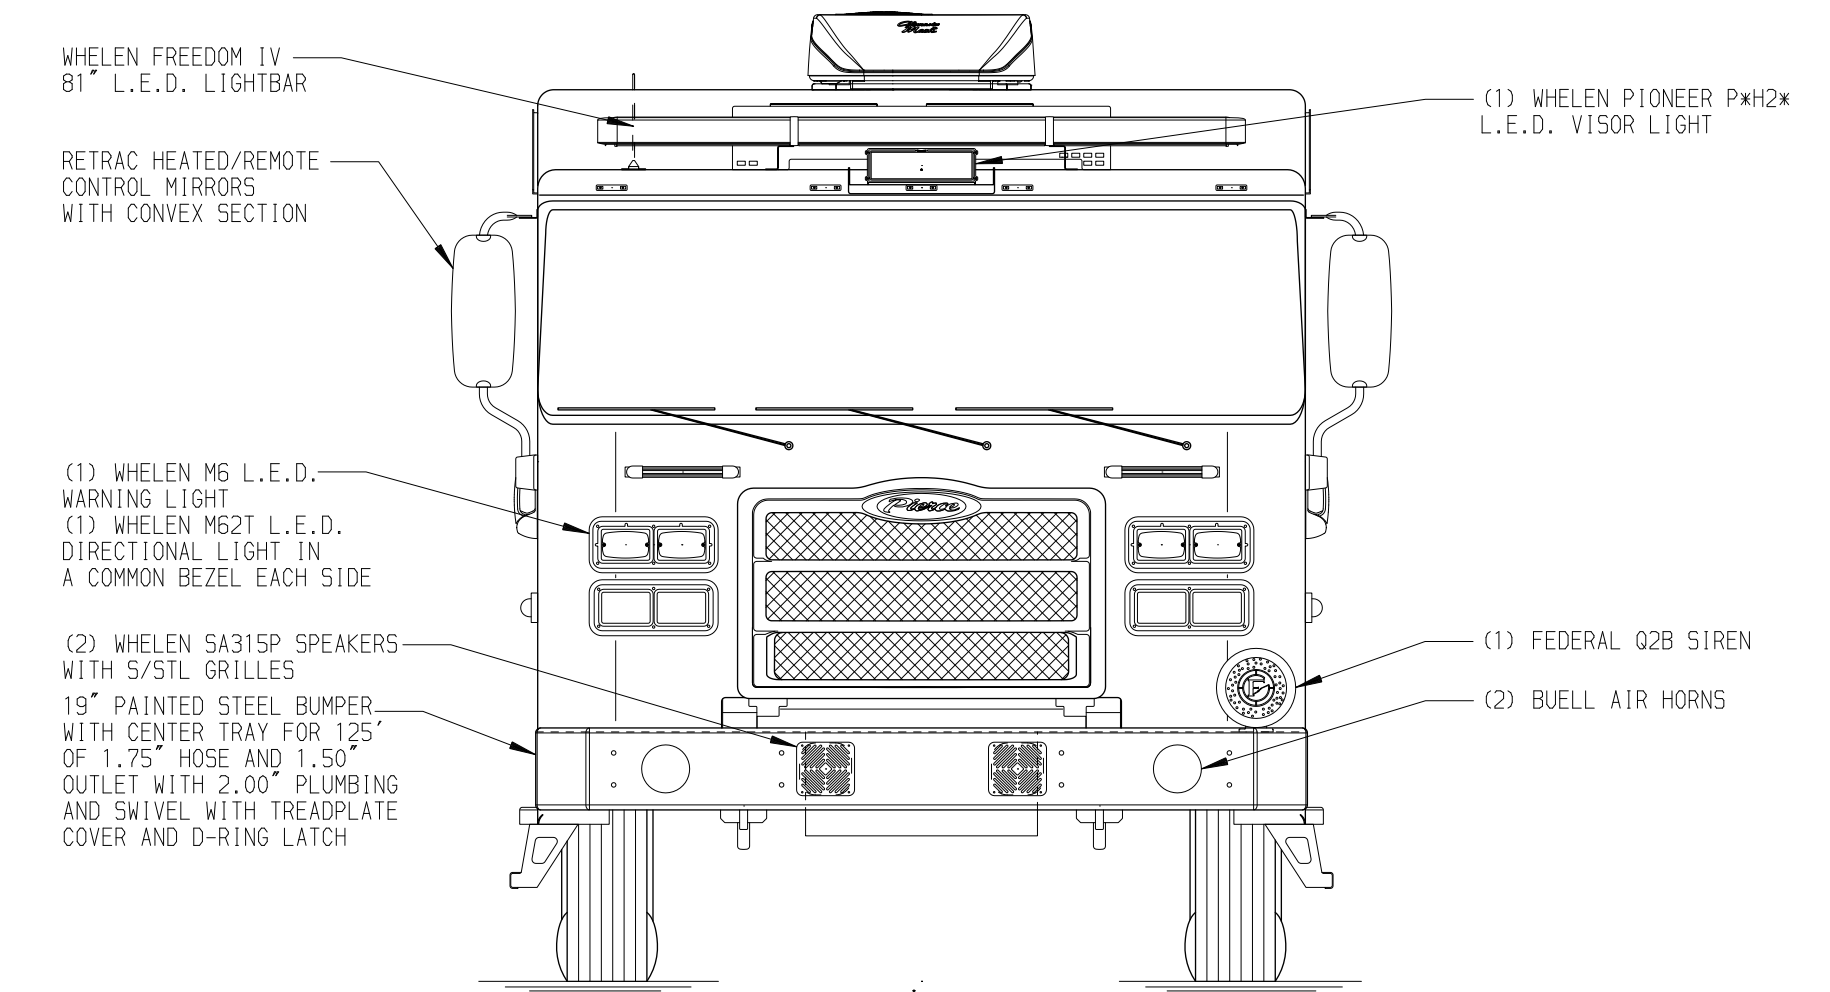
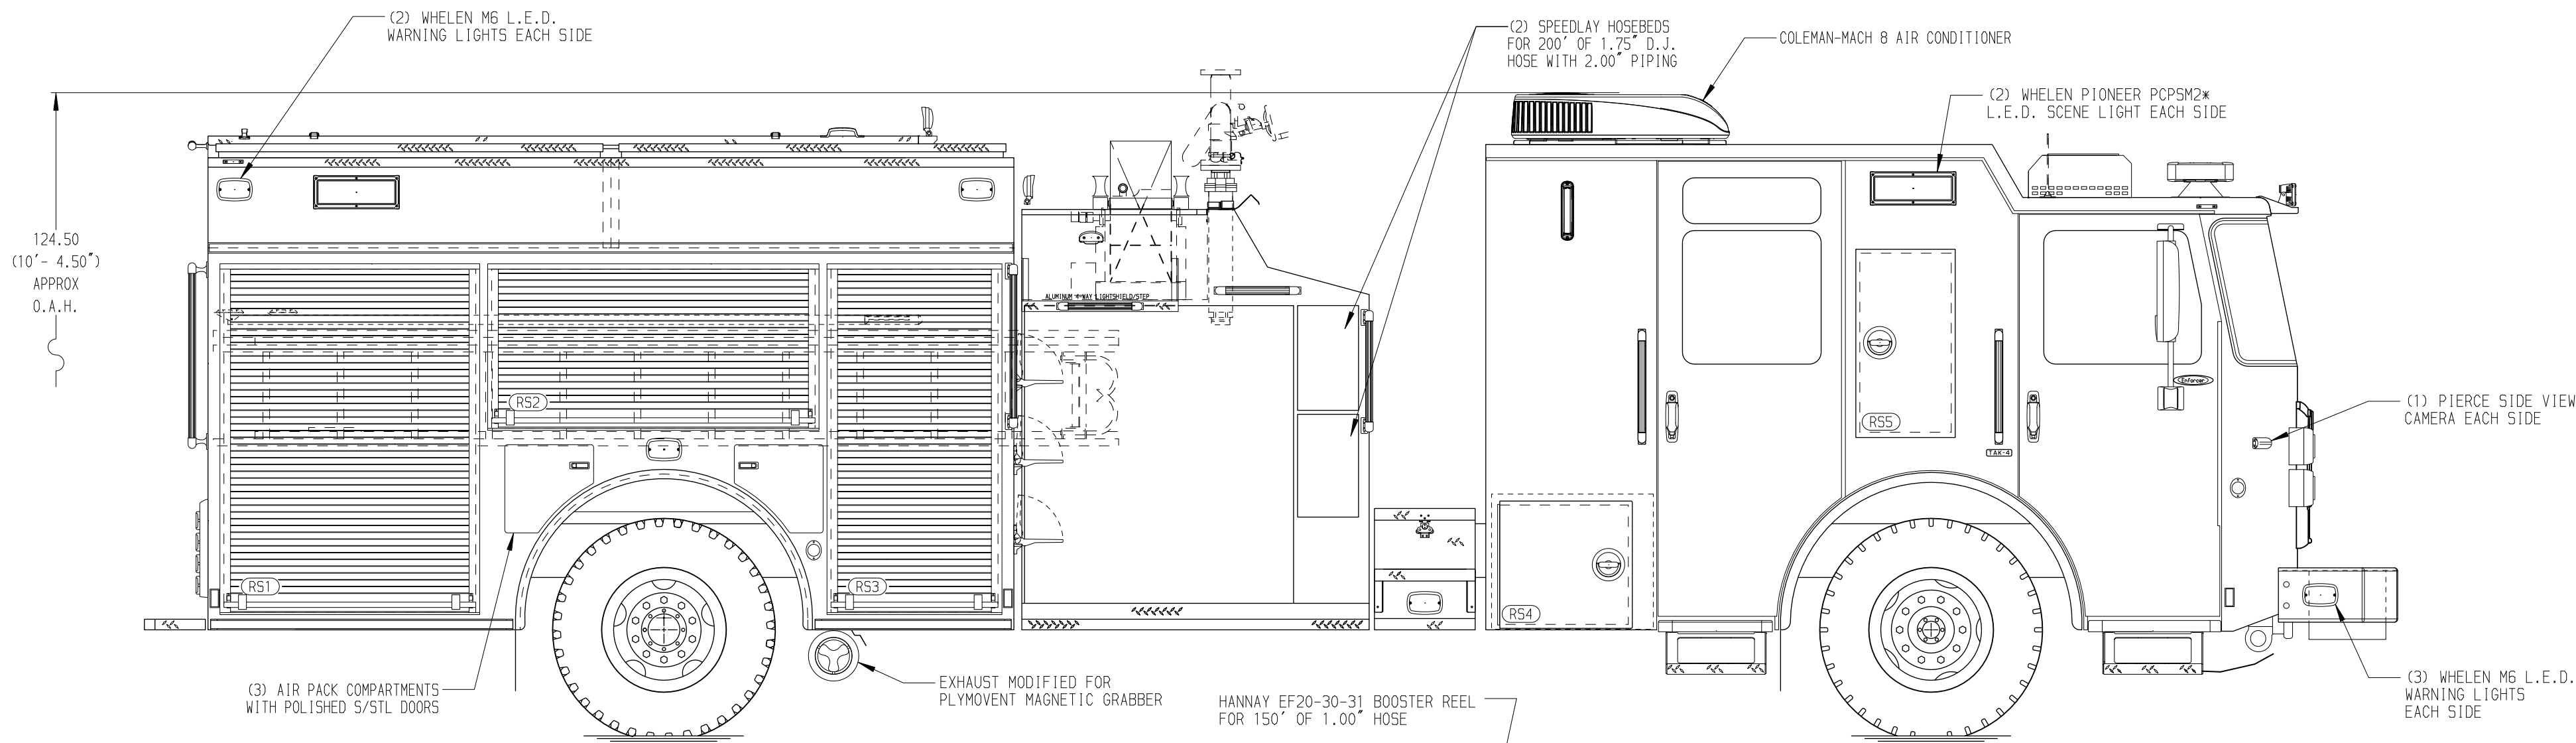


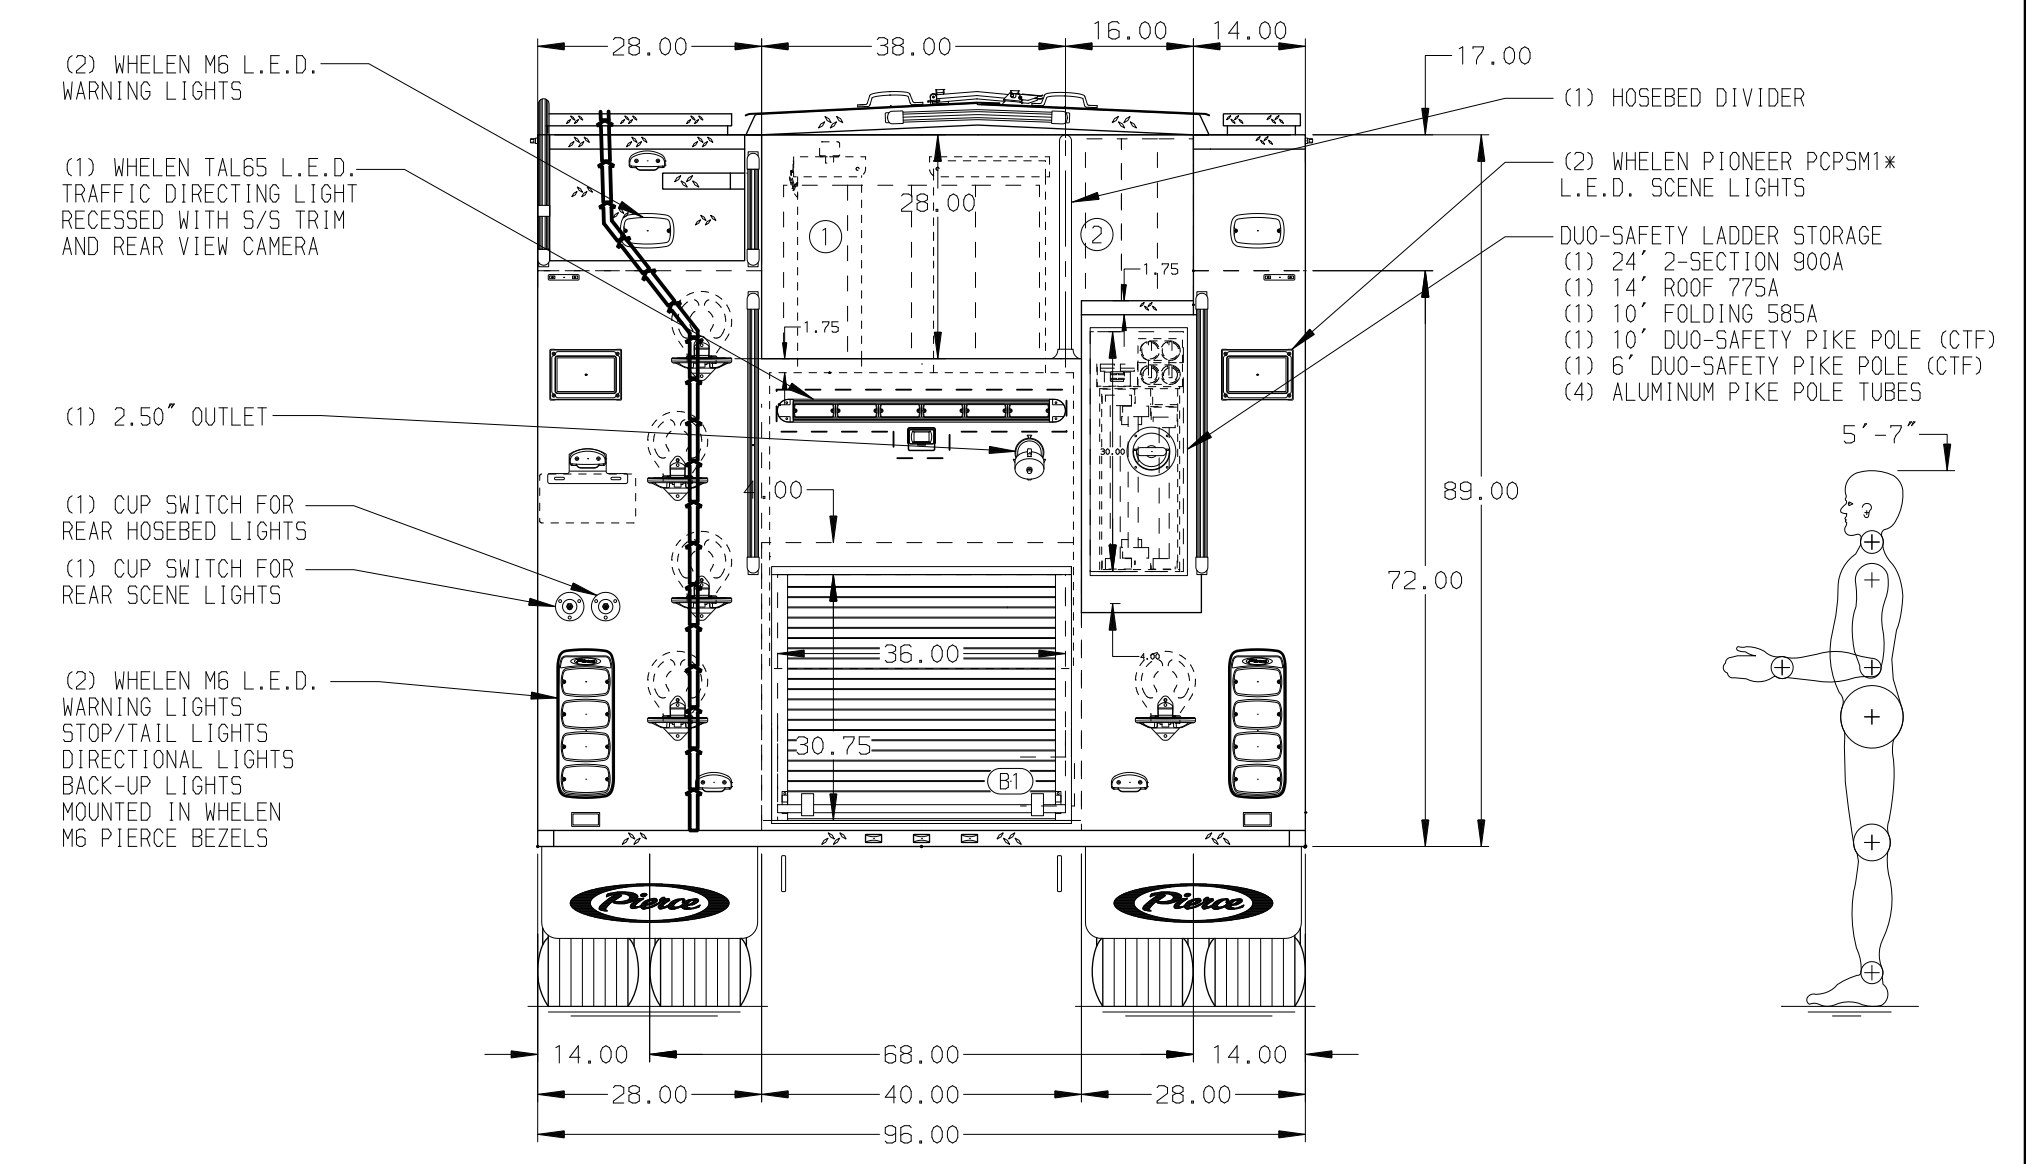

- HOSEBED CAPACITIES
- 1 1200' OF 5.00" D.J. POLY HOSE
 - 2 800' OF 2.50" D.J. POLY HOSE

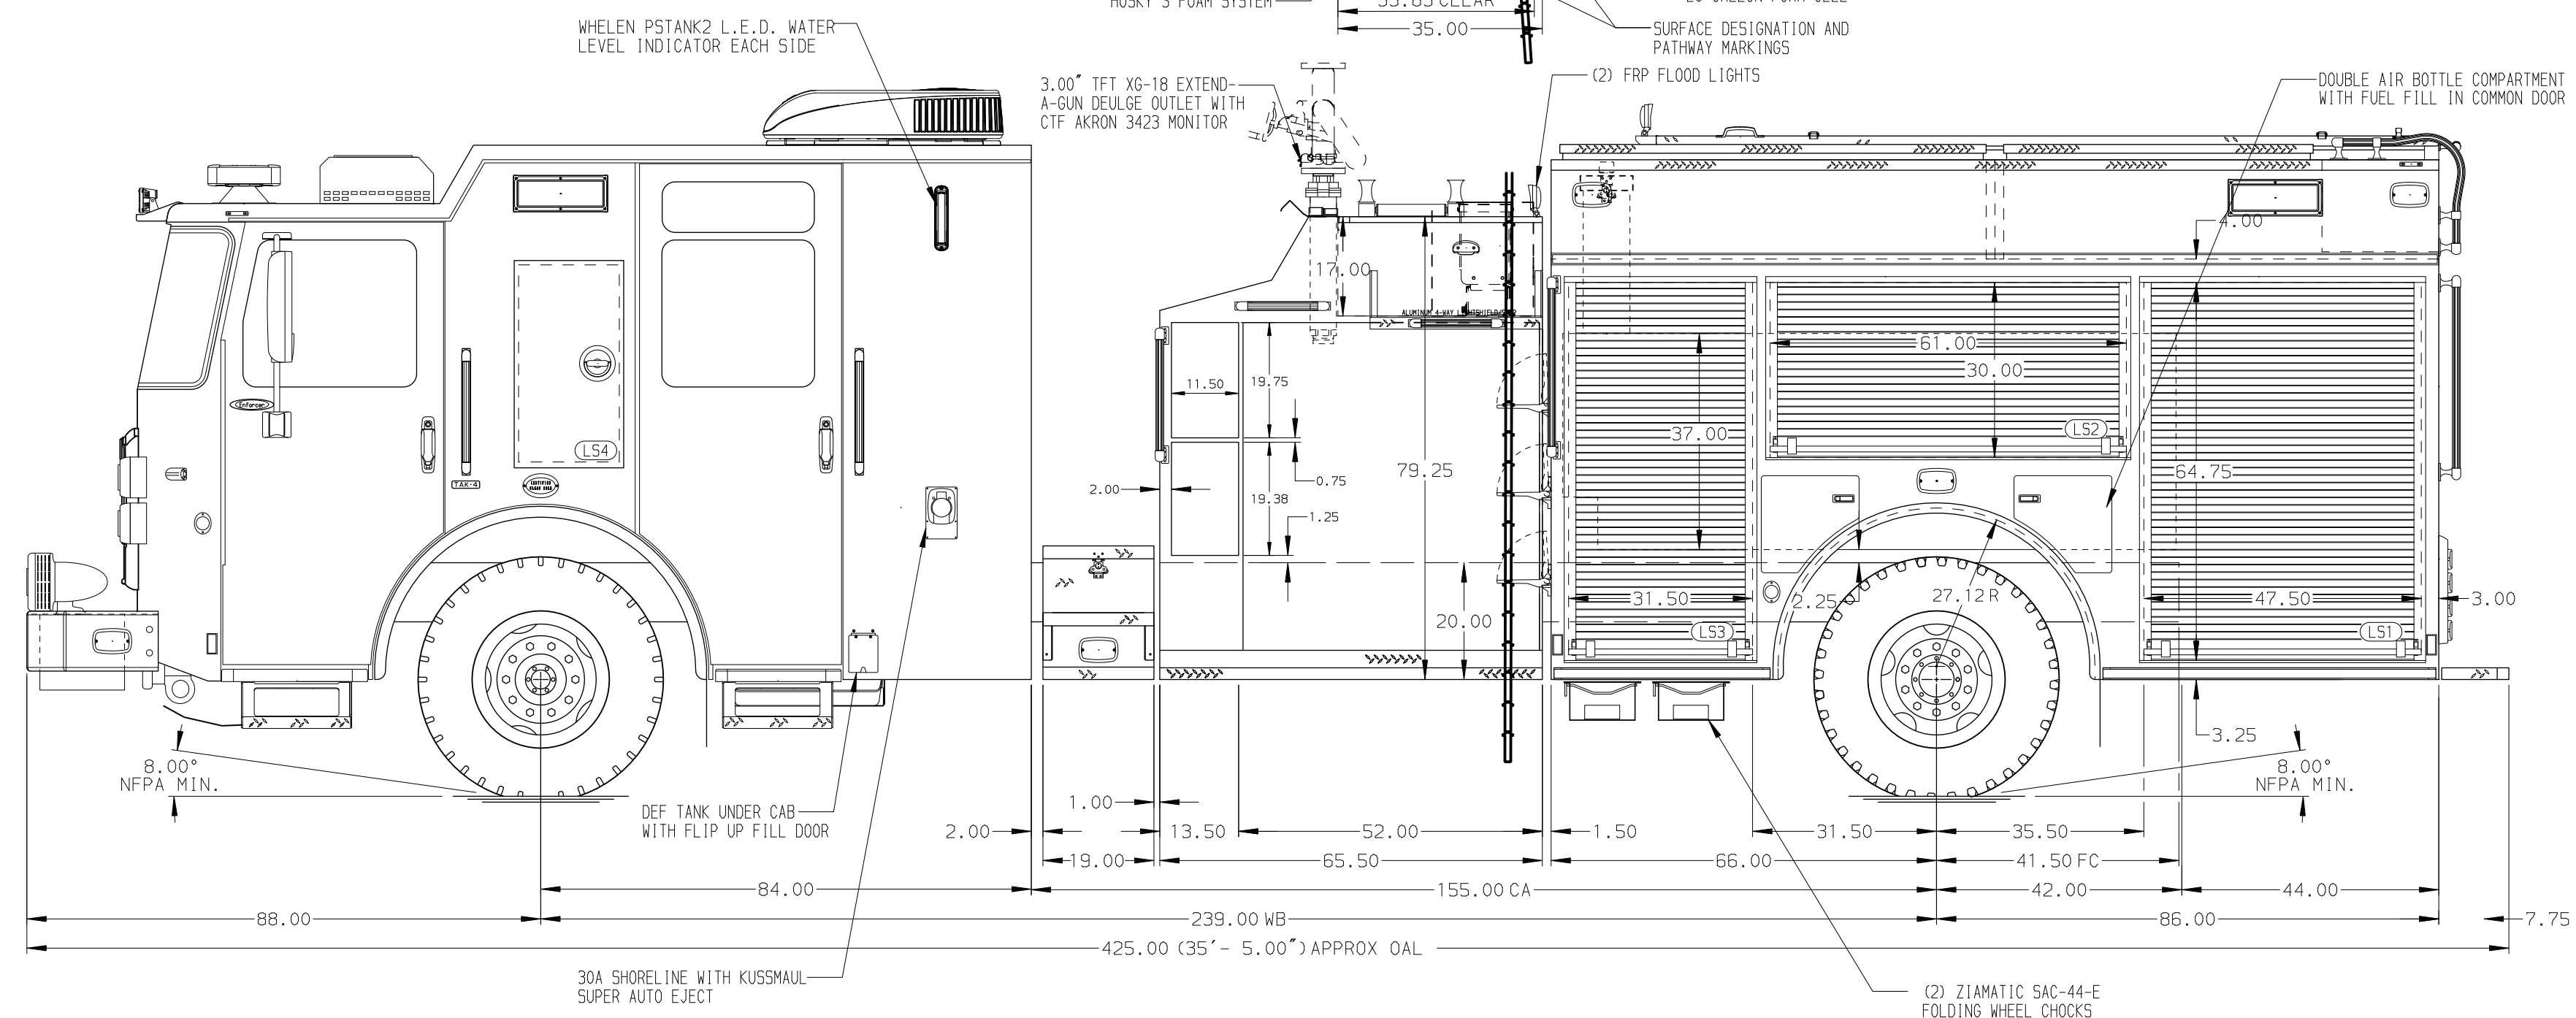

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. AIR INLET WITH DISCONNECT COUPLING UNDER THE DRIVER SIDE BUMPER EXTENSION
- 2. BATTERY CHARGER LOCATED PER ORDER
- 3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
- 4. SUB FEED BREAKER BOX LOCATED PER ORDER

05JUN26	LST	ZWE	CHASSIS DATA
01JUN26	LST	ZWE	MAKE
03DEC25	KLE	ZWE	PIERCE
31OCT25	LST	ZWE	MODEL
28OCT25	KLE	ZWE	ENFORCER
REV	DATE	BY	CH

		JOB NO.	40121
		SCALE	DATE
		1:24	
		DRAWN BY	01AUG25
		SJM	
		CHECKED BY	4AUG25
		KLH	
		SHEET SIZE	SHEET NO.
		D	1 OF 1

TITLE 2000GPM, 520G TANK, 500G WATER, 20G FOAM 152" 2G PUMPER, HARDWIRED

FOR ABILENE FIRE DEPARTMENT ABILENE, TEXAS

DWG NO. 40121AD